


ULTIMATE™ ARTICULATED LADDERS



EasyHinge™

Durable, steel hinge features a positive acting lever for smooth and consistent locking/unlocking of the ladder sections, allowing the EasyHinge™ to be positioned at 180°, 105°, & 40° angles.



Comfort

The wide 14" to 23" spacing between the side rails allows a comfortable working space.



Built In Stabilizer

The unique flared end design provides a 23" wide base for support. Fiberglass model has a stabilizer bar.




ANSI
Meets or exceeds requirements of American National Standards Institute
ANSI A14.5



ANSI
Meets or exceeds requirements of American National Standards Institute
ANSI A14.2



MODEL	LADDER SIZE	MATERIAL	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-3092-13	13'	Fiberglass	13"	46	5.15'
L-3092-15	15'	Fiberglass	15"	49	7.5'
L-2092-13	13'	Aluminum	13"	36	5.15'
L-2091-17	17'	Aluminum	17"	43	7.5'

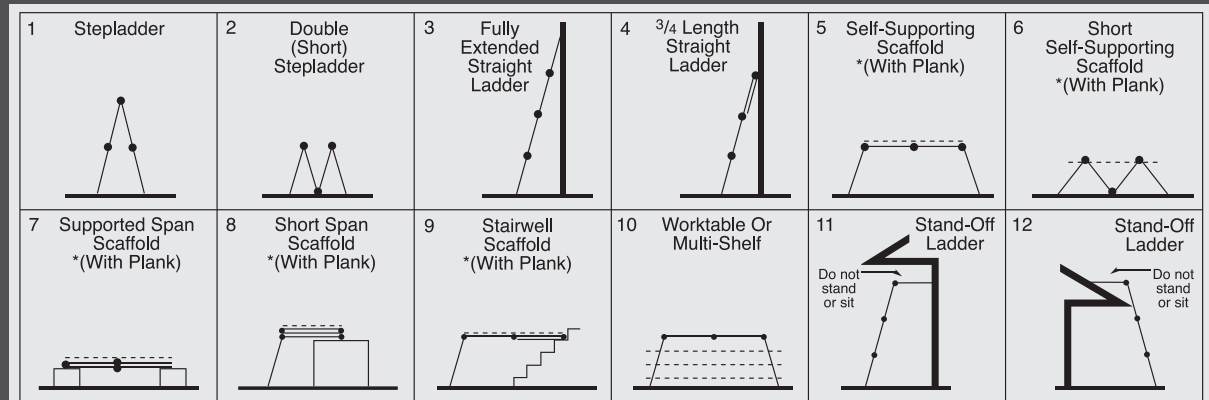

*2" x 12" plank needed for these positions