

EXTENSION



SERIES L-3022-PT

TYPE IA

300 LBS

LOAD CAPACITY

(Includes weight of user plus materials)

FIBERGLASS EXTENSION LADDER

FEATURING LOUISVILLE LADDER'S

LEANGREEN TECHNOLOGY



SCRATCH & UV RESISTANT DUTY RATED TOP

No more OSHA fines due to missing duty rating labels. Heat Transfer Top keeps duty rating displayed in sight for the user.



MAX LOCK™

THE STRONGEST, TOUGHEST, LIGHTEST RUNG LOCK EVER.



LOUISVILLE
LADDER

BECAUSE WORK AIN'T PLAY.



EXTENSION



1 ProTop™

Updated and improved Non-marring "V" shape top to fit into corners.



2 Tool Tether Anchor Point

New tool tether anchor point and improved tool slot placement creates 80% extra space for your tools.

Compared to previous design



3 MaxLock™

The strongest, toughest, lightest rung lock ever.




4 Direct Connection

Direct rung to rail connection for increased stability.



5 Swivel Safety Shoes

Steel swivel safety shoes with metal shield for increased durability.

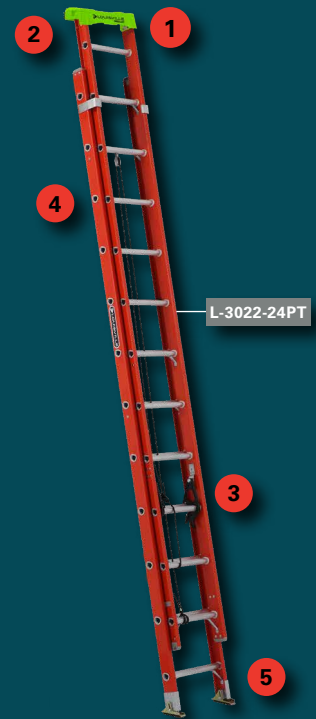

L-3022-PT FLYER JULY 2022 © Louisville Ladder, Inc. All rights reserved.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	19' 10"	42	8'
L-3022-24PT	24'	12'	21'	23' 8"	51	9.5'
L-3022-28PT	28'	14'	25'	27' 7"	60	11'
L-3022-32PT	32'	16'	29'	31' 5"	67	12.9'

INSIDE WIDTH	BASE	FLY	OUTSIDE WIDTH	BASE	FLY
20'-28' MODELS	14 11/16"	13 11/16"	20'-28' MODELS	17 1/16"	16 1/16"
32' MODELS	15 5/16"	14 5/16"	32' MODELS	17 11/16"	16 11/16"



WWW.LOUISVILLELADDER.COM

