

TYPE IAA

# ATTIC LADDER



SERIES AH2X40MS

# 375 LBS

LOAD CAPACITY

(Includes weight of user plus materials)



ALUMINUM ATTIC LADDER

**NEW**  
PRODUCT



T-HANDLE  
FOR EASY  
ACCESS

AVAILABLE IN  
22" & 25"  
WIDE OPENING

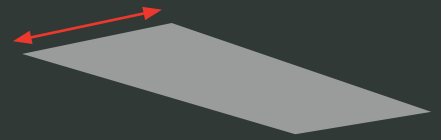

WEATHER STRIPPING  
THAT **REDUCES**  
ENERGY LOSS



**LOUISVILLE**  
LADDER

**BUILT** TO  
BE  
**ABOVE**

**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute

**OSHA**  
MEETS  
REQUIREMENTS

# ATTIC LADDER




SERIES AH2X40MS



**1 Lighter Aluminum Frame**  
Pre-drilled holes for easier installation.




**2 Practical Operation**  
Door with spring system.

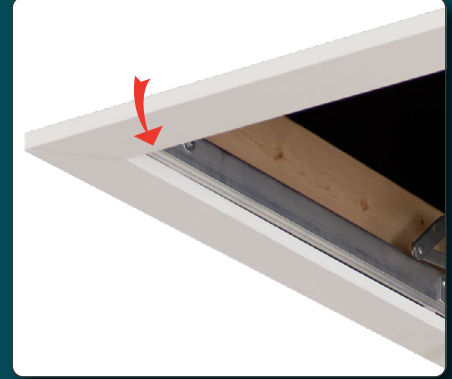

**3 Energy Efficiency**  
Weather stripping that reduces energy loss.



**4 Adjustable Shoes**  
Fits heights 7-ft 8 in to 10-ft 3-in.

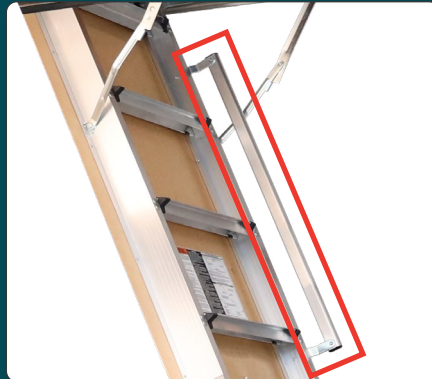

**5 Safety**  
Aluminum handrail for a comfortable transition.



AH2X40MS FLYER 2024 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AH2240MS	7' 8"	10' 3"	22.5" X 54"	67"	74"	3"	41.2	6.4
AH2540MS	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	46.3	7.3

\*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

