

**ENERGY
EFFICIENT**
FIRE RATED



MODELS
AL2540MG-R10FT
AL3040MG-R10FT

TYPE IAA

375 LBS
LOAD CAPACITY

(Includes weight of user plus materials)

FIRE RATED ALUMINUM ATTIC LADDER

**NEW
PRODUCT**





T-HANDLE
FOR EASY
ACCESS

WITH
INSULATION
PACKAGE AND
WIDER
CLEARANCE



FLAME RETARDANT
TIME OF 30 MINUTES

AVAILABLE IN
25" & 30"
WIDE OPENING

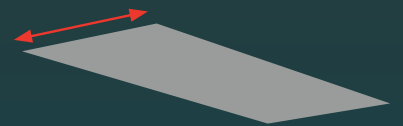

REDUCE
ENERGY LOSS
R10 INSULATED DOOR &
WEATHER STRIPPING



LOUISVILLE
LADDER

**BUILT
TO
BE
ABOVE**



ENERGY EFFICIENT

FIRE RATED



MODELS
AL2540MG-R10FT
AL3040MG-R10FT



1 Lighter Aluminum Frame
Pre-drilled holes for easier installation.



2 Fire Rated Door
Flame retardant time of 30 minutes compliant with ASTM E-84



3 Superior Energy Efficiency
R10 insulated door with weather stripping that reduces energy loss.



4 Smooth Operation
Easier to open and close. Door with gas piston system.



5 Adjustable Shoes
Fits heights 7-ft 8 in to 10-ft 3-in.



6 Safety
Aluminum handrail for a comfortable transition.



AL2540MG-R10FT / AL3040MG-R10FT FLYER 2024 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2540MG-R10FT	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	75.2	9.0
AL3040MG-R10FT	7' 8"	10' 3"	30" X 54"	67"	74"	3"	85.0	10.6

*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

