

**ENERGY
EFFICIENT**



MODELS
AL2540MG-R10
AL3040MG-R10

TYPE IAA

375 LBS
LOAD CAPACITY

(Includes weight of user plus materials)

ALUMINUM ATTIC LADDER


**NEW
PRODUCT**



T-HANDLE
FOR EASY
ACCESS

WITH
INSULATION
PACKAGE AND
WIDER
CLEARANCE

AVAILABLE IN
25" & 30"
WIDE OPENING

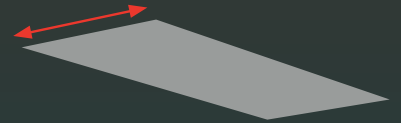

R10
INSULATED
DOOR



WEATHER STRIPPING
THAT **REDUCES**
ENERGY LOSS



LOUISVILLE
LADDER

**BUILT
TO
BE
ABOVE**

ANSI
Meets or exceeds requirements
of American National Standards Institute

MEETS
OSHA
REQUIREMENTS

ENERGY EFFICIENT



MODELS
AL2540MG-R10
AL3040MG-R10



1 Lighter Aluminum Frame
Pre-drilled holes for easier installation.



2 Smooth Operation
Easier to open and close. Door with gas piston system.



3 Superior Energy Efficiency
R10 insulated door with weather stripping that reduces energy loss.



4 Adjustable Shoes
Fits heights 7-ft 8 in to 10-ft 3-in.



5 Safety
Aluminum handrail for a comfortable transition.



AL2540MG-R10 / AL3040MG-R10 FLYER 2023 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2540MG-R10	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	62.4	8.9
AL3040MG-R10	7' 8"	10' 3"	30" X 54"	67"	74"	3"	72	10.4

*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

