

**EVEREST**  
FIRE RATED



SERIES  
AL2X40LG-R5FT

TYPE IAA

**375 LBS**  
LOAD CAPACITY

(Includes weight of user plus materials)

FIRE RATED ALUMINUM ATTIC LADDER

**NEW**  
PRODUCT




T-HANDLE  
FOR EASY  
ACCESS

HIGHER  
CEILING HEIGHTS  
& LONGER  
OPENING LENGTH



FLAME RETARDANT  
TIME OF 30 MINUTES

AVAILABLE IN  
22" & 25"  
WIDE OPENING

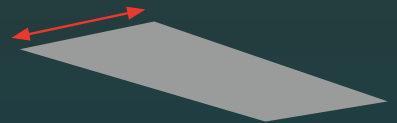

REDUCE  
ENERGY LOSS  
R5 INSULATED DOOR &  
WEATHER STRIPPING



**LOUISVILLE**  
LADDER

**BUILT** TO  
BE  
**ABOVE**

**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute

**OSHA**  
REQUIREMENTS

# EVEREST

**FIRE RATED**



SERIES  
AL2X40LG-R5FT



**1 Lighter Aluminum Frame**  
Pre-drilled holes for easier installation.



**2 Fire Rated Door**  
Flame retardant time of 30 minutes compliant with ASTM E-84



**3 Superior Energy Efficiency**  
R5 insulated door with weather stripping that reduces energy loss.




**4 Smooth Operation**  
Easier to open and close.  
Door with gas piston system.



**5 Adjustable Shoes**  
Fits heights 10-ft to 12-ft.



**6 Safety**  
Double aluminum handrail for a comfortable transition.

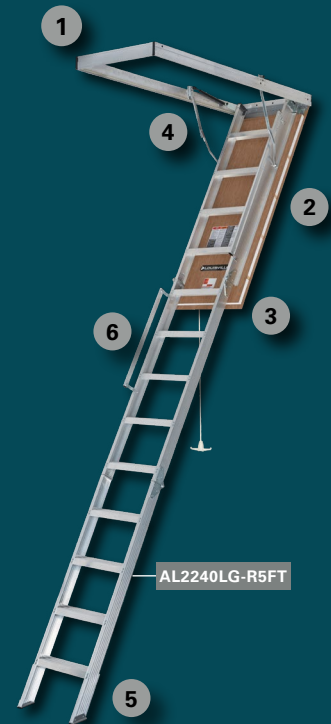

AL2X40LG-R5FT FLYER 2024 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2240LG-R5FT	10'	12'	22.5" X 63"	78"	87"	3"	65.8	10.2
AL2540LG-R5FT	10'	12'	25.5" X 63"	78"	87"	3"	70.5	11.6

\*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

