

# EVEREST



SERIES  
AL2X40LG-R5

## ALUMINUM ATTIC LADDER

TYPE IAA

# 375 LBS

LOAD CAPACITY

(Includes weight of user plus materials)

**NEW**  
PRODUCT



T-HANDLE  
FOR EASY  
ACCESS

## HIGHER CEILING HEIGHTS & LONGER OPENING LENGTH

## AVAILABLE IN 22" & 25" WIDE OPENING



## R5 INSULATED DOOR



## WEATHER STRIPPING THAT REDUCES ENERGY LOSS



**LOUISVILLE.**  
LADDER

**BUILT** TO  
BE  
**ABOVE**

**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.9



# EVEREST



SERIES  
AL2X40LG-R5



**1 Lighter Aluminum Frame**  
Pre-drilled holes for easier installation.



**2 Smooth Operation**  
Easier to open and close. Door with gas piston system.




**3 Superior Energy Efficiency**  
R5 insulated door with weather stripping that reduces energy loss.



**4 Adjustable Shoes**  
Fits heights 10-ft to 12-ft.



**5 Safety**  
Double aluminum handrail for a comfortable transition.

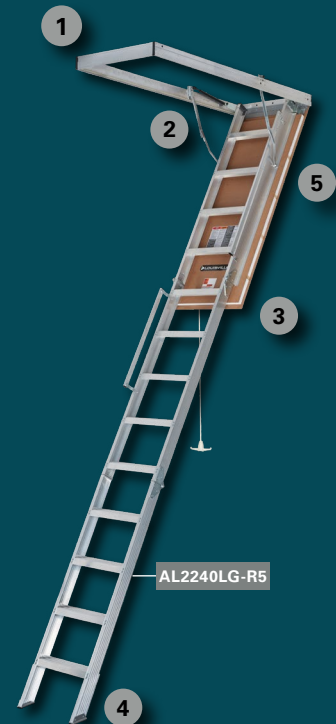

AL2X40LG-R5 FLYER 2024 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2240LG-R5	10'	12'	22.5" X 63"	78"	87"	3"	61.7	10.0
AL2540LG-R5	10'	12'	25.5" X 63"	78"	87"	3"	65.5	11.4

\*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

