

ATTIC LADDER

FIRE RATED



SERIES
AL2X40MG-FT

TYPE IAA

375 LBS

LOAD CAPACITY

(Includes weight of user plus materials)

FIRE RATED ALUMINUM ATTIC LADDER

NEW
PRODUCT





T-HANDLE
FOR EASY
ACCESS



FLAME RETARDANT
TIME OF 30 MINUTES
COMPLIANT WITH ASTM E-84

AVAILABLE IN
22" & 25"
WIDE OPENING

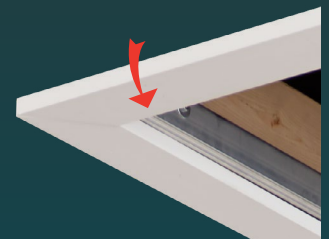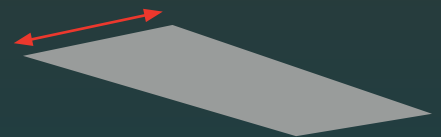

WEATHER STRIPPING
THAT REDUCES
ENERGY LOSS



LOUISVILLE
LADDER

BUILT TO
BE
ABOVE

ANSI
Meets or exceeds requirements
of American National Standards Institute

MEETS
OSHA
REQUIREMENTS

ATTIC LADDER

FIRE RATED



SERIES
AL2X40MG-FT



1 Lighter Aluminum Frame
Pre-drilled holes for easier installation.



2 FireRated Door
Flame retardant time of 30 minutes compliant with ASTM E-84



3 Energy Efficiency
Weather stripping that reduces energy loss.




4 Smooth Operation
Easier to open and close. Door with gas piston system.



5 Adjustable Shoes
Fits heights 7-ft 8 in to 10-ft 3-in.



6 Safety
Aluminum handrail for a comfortable transition.

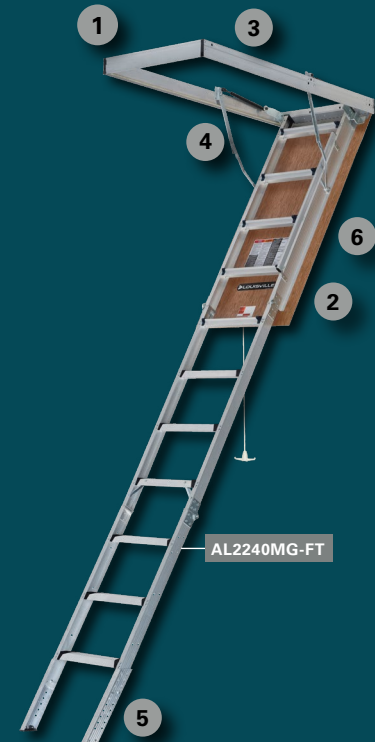

AL2X40MG-FT FLYER 2024 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2240MG-FT	7' 8"	10' 3"	22.5" X 54"	67"	74"	3"	42.9	6.6
AL2540MG-FT	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	45.1	7.4

*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

