

ELITE



SERIES AL2X40MG

ALUMINUM ATTIC LADDER

TYPE IAA

375 LBS
LOAD CAPACITY



(Includes weight of user plus materials)

NEW
PRODUCT



**STURDY, YET
LIGHTWEIGHT
FOR EASIER
INSTALLATION**

**AVAILABLE IN
22" & 25"
WIDE OPENING**

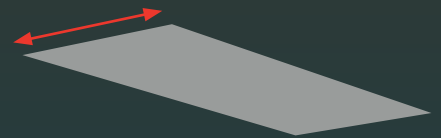

**WEATHER STRIPPING
THAT REDUCES
ENERGY LOSS**



LOUISVILLE.
LADDER

**BUILT TO
BE
ABOVE**

ANSI
Meets or exceeds requirements
of American National Standards Institute

OSHA
MEETS
REQUIREMENTS

ELITE



SERIES AL2X40MG



1 Lighter Aluminum Frame
Pre-drilled holes for easier installation.



2 Smooth Operation
Easier to open and close. Door with gas piston system.



3 Energy Efficiency
Weather stripping that reduces energy loss.



4 Adjustable Shoes
Fits heights 7-ft 8 in to 10-ft 3-in.



5 Safety
Aluminum handrail for a comfortable transition.



AL2240MG FLYER 2024 © Louisville Ladder, Inc. All rights reserved.



MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE*	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2240MG	7' 8"	10' 3"	22.5" X 54"	67"	74"	3"	40.8	6.6
AL2540MG	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	43.8	7.6

*For maximum ceiling height



WWW.LOUISVILLELADDER.COM

