

# LOUISVILLE



PRODUCT  
CATALOG

BUILT TO  
BE  
ABOVE



# SINCE 1946

LOUISVILLE LADDER IS

**BUILT** TO  
BE

**ABOVE**

Innovation is at the heart of everything we do. At Louisville Ladder, it drives the design, engineering, and craftsmanship behind every product we create—setting the bar for quality, durability, and performance across the industry. From our smallest accessories to our most advanced ladder systems, each product is built with purpose and precision to support your goals—whether that's improving safety, increasing efficiency, or protecting your bottom line. Because at Louisville Ladder, we don't just build climbing solutions—we build with you in mind. Your worksite. Your success. Your future. That's how we've earned our place as the most trusted name at the top.

7765 National Turnpike, Unit 190  
Louisville, KY 40214

[www.louisvilneladder.com](http://www.louisvilneladder.com)

PHONE  
(USA AND CAN) 1.800.666.2811  
PHONE 1.502.636.2811  
FAX 1.800.274.4566  
EMAIL [marketing@louisvilneladder.com](mailto:marketing@louisvilneladder.com)



## A REPUTATION IN RELIABILITY

For more than 80 years, Louisville Ladder has been known as the company to trust for all of your ladder and climbing equipment needs. Our long-standing track record of designing hard-working, easy-to-use ladders is what sets us apart, and our commitment to building reliable products is just as important to us now as it was on day one. That's why when you buy a Louisville Ladder, you can feel confident knowing that you are buying the best.

## ADVANCING THE INDUSTRY

As job sites evolve, so do the demands placed on ladders, and on the people who use them. That's why we continue to innovate across our processes, product design, and materials, using both voice-of-customer insights and our deep expertise in ladder engineering to deliver an exceptional user experience.

Our commitment to advancing the industry means focusing on meaningful enhancements that maintain safety while improving ladder utility and promoting efficiency in everyday work. From high-visibility contact points that make standing surfaces easy to identify, to ergonomic step designs that promote comfort and confidence, every detail is thoughtfully considered. We also continually evaluate materials and construction methods to ensure our products perform reliably in real-world conditions.


By building on proven designs and elevating them through purposeful innovation, we remain a leader in ladder design, helping move the industry forward, one smart improvement at a time.

## WE COLLABORATE

Our customers are our most important asset, and we pride ourselves on building genuine relationships with them from the get-go. Our teamwork-based approach allows us to treat each and every customer as an important partner, regardless of size, and our knowledgeable team of experts is always available to help. We realize that each customer is unique, as are their needs, and we treat them accordingly with customized solutions. It's a simple concept that we have never veered from, and one that keeps our customers returning time and time again.

## INTEGRITY ABOVE ALL

When you've stood the test of time in an industry like ours, a strong foundation and unwavering values aren't optional, they're essential. At Louisville Ladder, we're proud of our decades of proven performance and unmatched expertise. But what truly sets us apart is our commitment to doing things the right way, guided by honesty, integrity, and authenticity at every step. From embracing sustainable practices, we stay grounded in the principles that matter most. Because while our products help you reach new heights, it's our values that keep us grounded.

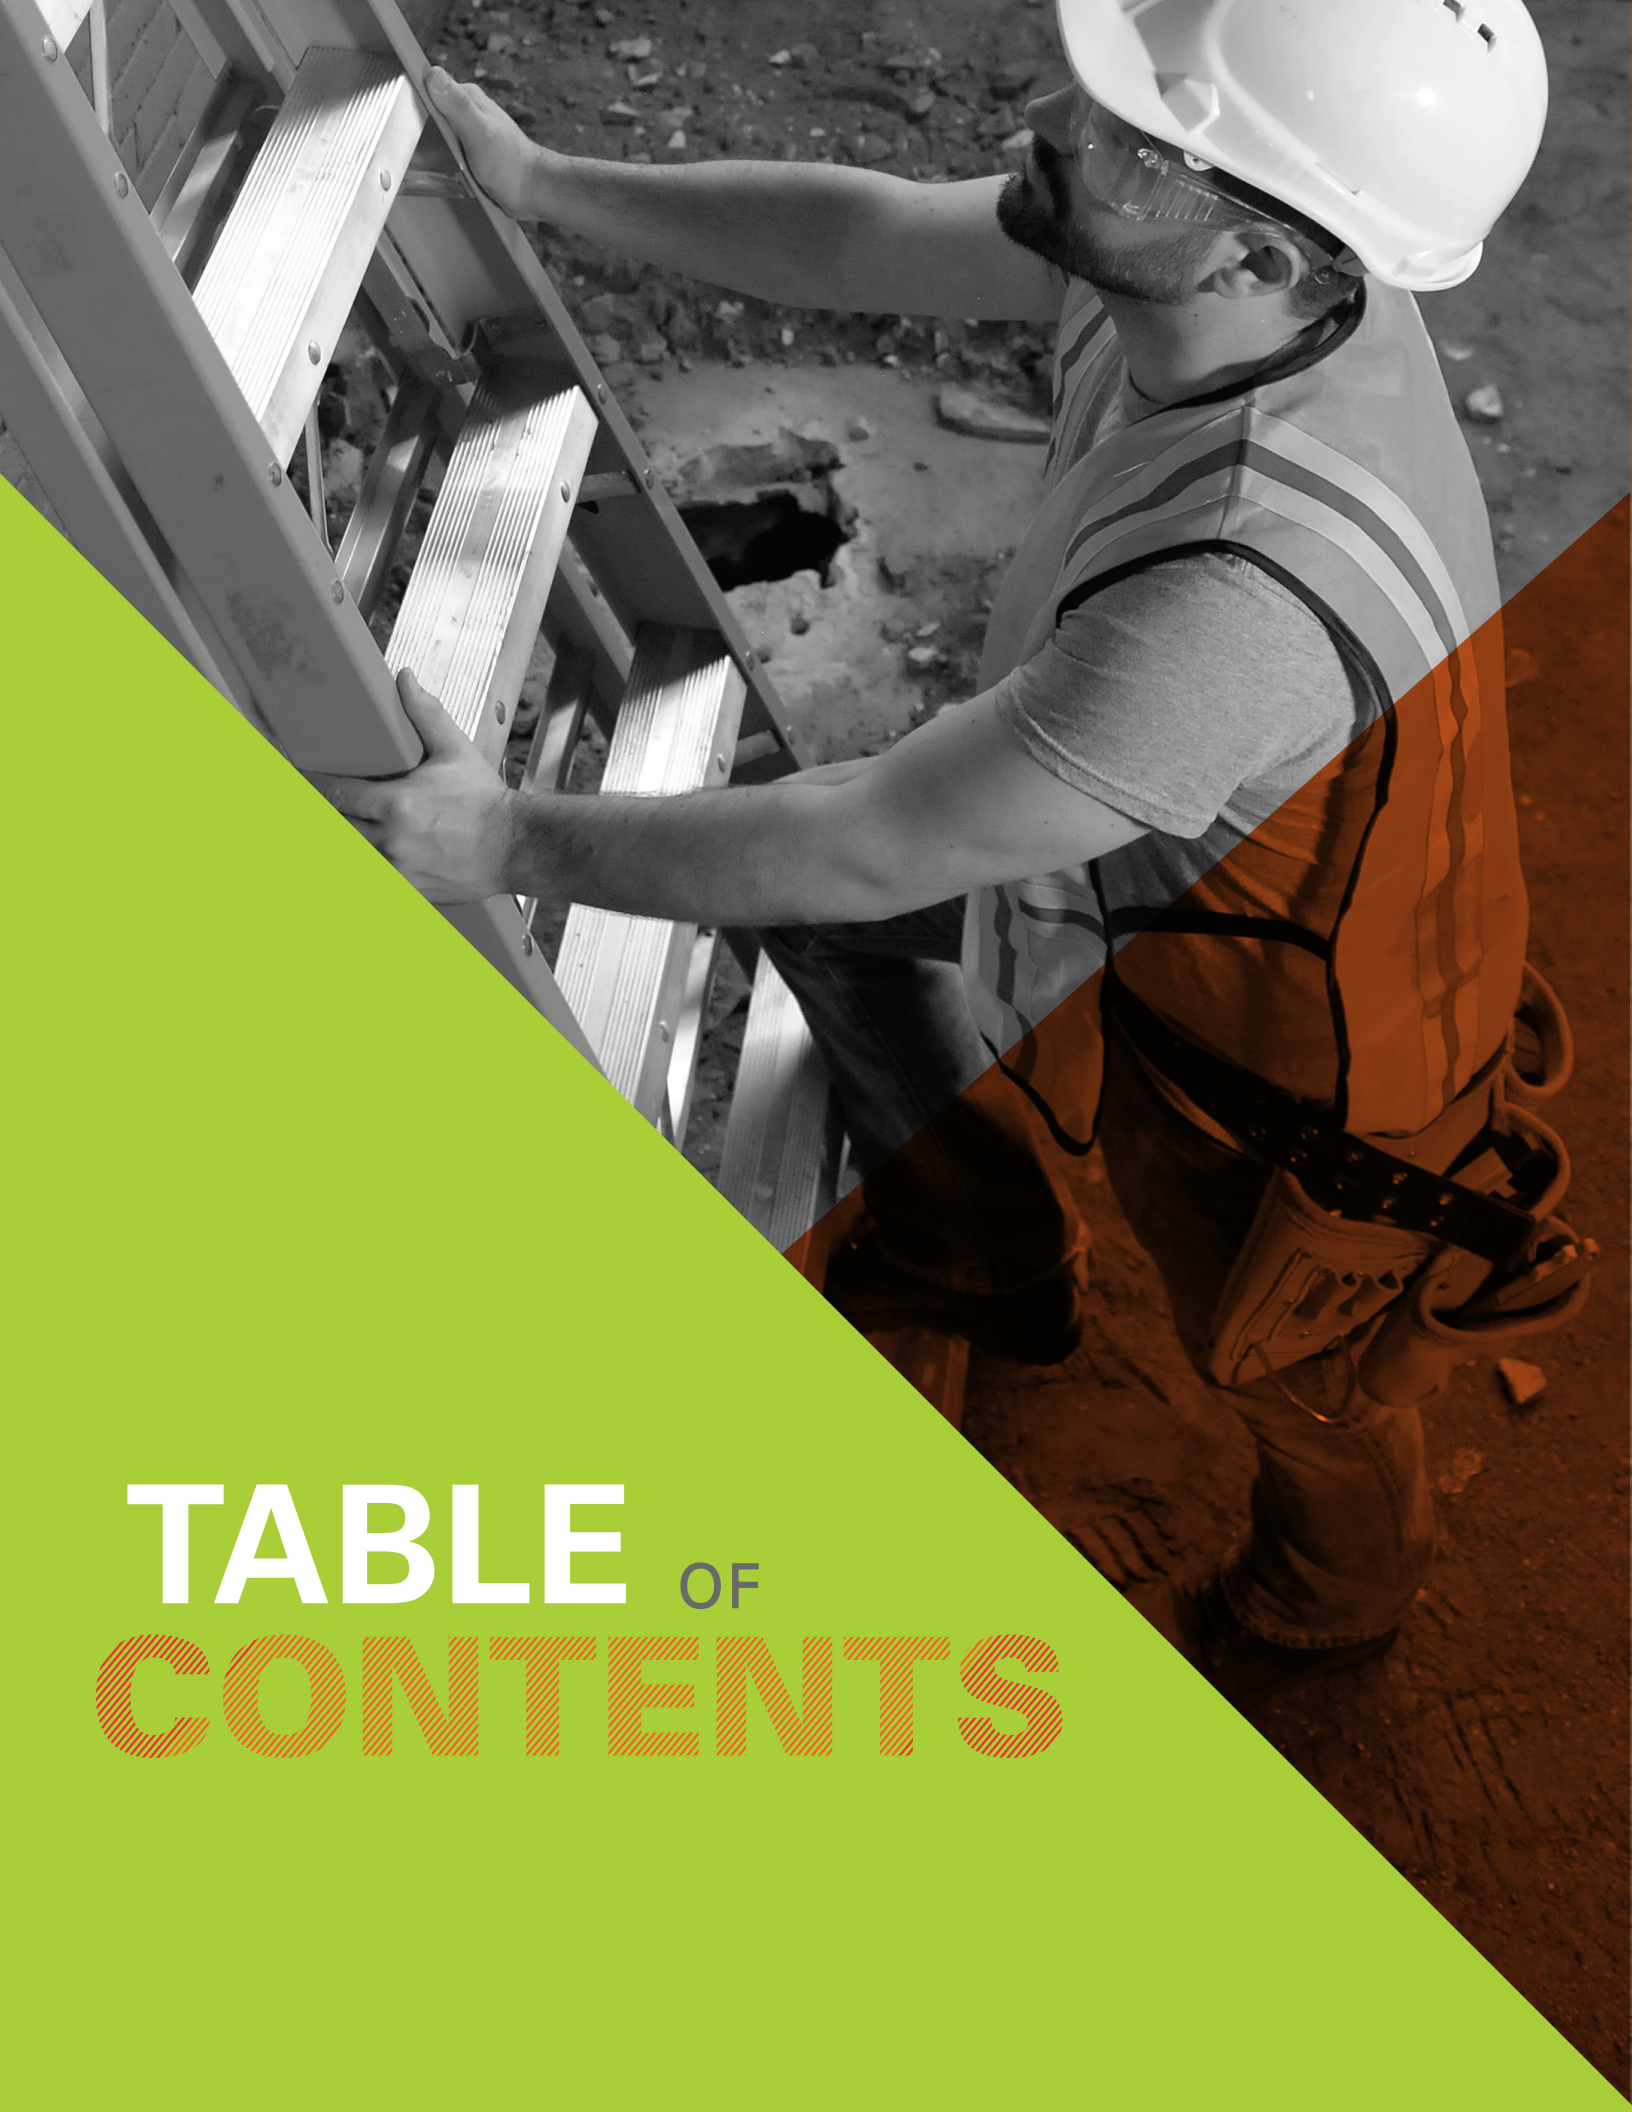

**TABLE** OF  
**CONTENTS**

Ladder Selection Guide..... 6  
 Ladder Safety Standards .....7  
 Product Feature Glossary ..... 8  
 Product Accessories .....10

**STEPLADDERS | FIBERGLASS**

FS1400HD STEP..... 375lbs ... 13  
 FS1500 STEP.....300lbs ... 13  
 L-3016 STEP.....300lbs ...14  
 FS2000 STEP.....250lbs...14  
 FS4000 STEP.....225lbs...14  
 FS1300HD STEP.....375lbs... 15  
 FM1400HD TWIN FRONT.....375lbs... 15  
 FM1500TWIN FRONT.....300lbs ... 15

**PINNACLE**

FXP1800HD PRO PLATFORM.....375lbs ... 17  
 FXP1700 PRO PLATFORM.....300lbs ... 17

**2 IN 1 LEANING LADDERS**

FCP1400HD CROSS PINNACLE.....375lbs... 19  
 FXS1400HD CROSS STEP.....375lbs ... 20  
 FXS1500 CROSS STEP.....300lbs ... 20  
 FGS1500 CROSS STEP GO.....300lbs ... 21

**STEPLADDERS | ALUMINUM**

AS3000 STEP.....300lbs ... 23  
 AS2100 STEP.....250lbs ... 23  
 AS4000 STEP.....225lbs ... 24  
 AP5000 MOBILE PLATFORM.....300lbs ... 24

**STEP STOOLS**

FY8000 FIBERGLASS INDUSTRIAL STEP STAND.....375lbs..... 26  
 L-3042 FIBERGLASS MINI WORKING PLATFORM... 300lbs ..... 26  
 AY8000 ALUMINUM INDUSTRIAL STEP STAND..... 375lbs ..... 26  
 L-2011 ALUMINUM STOCKING STOOL .....300lbs ... 26  
 L-4461 STEEL STEP STOOL .....375lbs ..... 27

**EXTENSION LADDERS | FIBERGLASS**

FE4200HD EXTENSION.....375lbs ... 29  
 L-3022-PT EXTENSION.....300lbs... 29  
 FE3200 EXTENSION..... 300lbs ... 29  
 FE3100 SINGLE.....300lbs ... 30  
 FE7200 EXTENSION.....300lbs ... 30  
 FE0600 EXTENSION.....225lbs ... 30

FE8900 MANHOLE.....375lbs..... 31  
 FH1000 SHELF..... 300lbs..... 31

**EXTENSION LADDERS | ALUMINUM**

AE1200HD EXTENSION.....375lbs..... 33  
 AE2100 SINGLE.....300lbs ..... 33  
 AE2200 EXTENSION.....300lbs ..... 33  
 AE3200PG EXTENSION.....250lbs ..... 34  
 AE4200PG EXTENSION.....225lbs ..... 34  
 L-2321 EXTENSION.....200lbs ..... 34  
 L-2324 EXTENSION.....200lbs ..... 35  
 AE1600 3-SECTION EXTENSION.....250lbs ..... 35

**SPECIALTY LADDERS**

FT1500 FIBERGLASS TRIPOD.....300lbs..... 37  
 L-2032 ALUMINUM SAWHORSE.....300lbs ..... 37  
 AZ9900 SINGLE LADDER.....300lbs ..... 37

**MULTIPURPOSE LADDERS**

L-2099 ALUMINUM MULTIPURPOSE.....300lbs ..... 39

**WAREHOUSE/LADDERS/SCAFFOLDS/PLANKS**

P SERIES SCAFFOLD PLANKS & STAGE PLATFORMS..... 41  
 MODULAR GUARDRAIL SYSTEMS ..... 42  
 LP-2921 SERIES TELESCOPING PLANK ..... 43  
 PD9200 SCAF-A-DECK ..... 43  
 LADDER RACKS SRA10 ..... 43

C.L.I.M.B. Academy ..... 44  
 LOGOLOCK SYSTEM..... 44  
 WAREHOUSE LOCATIONS ..... 45  
 SOCIAL MEDIA..... 45  
 TERMS & CONDITIONS ..... 45

# HOW TO SELECT A LADDER A GUIDE

## 1. SELECT A TYPE



**STEPLADDER**

Most popular ladder type, sized 4'-20', with built-in tool storage.



**TWIN FRONT LADDER**

Allows two users to work on the same ladder simultaneously.



**PLATFORM LADDER**

Designed to reduce fatigue and increase comfort with the slip resistant platform.




**LEANING LADDERS**

A stepladder that turns into a leaning ladder getting you closer to your work.



**EXTENSION LADDER**

Leans against a firm support. Available in 16'-40', ideal for higher elevations.



**MULTIPURPOSE**

1 ladder - 6 positions. Allowing you to work any way the job site demands.

## 2. SELECT A LADDER MATERIAL



### ALUMINUM

- Lightweight
- Long-lasting construction
- Resists corrosion
- Ideal for painting, roofing, and siding



### FIBERGLASS

- Non-conductive when clean and dry
- Strong and durable
- Weather-resistant
- Great for heavy-duty construction

## 3. SELECT A LOAD CAPACITY

**TYPE IAA**  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

**TYPE IAA:** Professional use. Extra heavy duty. Capable of supporting 375 lbs.  
**USES:** MRO and industrial construction.

**TYPE IA**  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

**TYPE IA:** Professional use. Extra heavy duty. Capable of supporting 300 lbs.  
**USES:** Roofing, building maintenance, contracting and industrial construction.

**TYPE I**  
**250** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

**TYPE I:** Industrial use. Heavy duty. Capable of supporting 250 lbs.  
**USES:** Building maintenance, general contracting and sheet rock.

**TYPE II**  
**225** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

**TYPE II:** Commercial use. Medium duty. Capable of supporting 225 lbs.  
**USES:** Light commercial and general repair, painting and cleaning.

**TYPE III**  
**200** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

**TYPE III:** Household use. Light duty. Capable of supporting 200 lbs.  
**USES:** Light cleaning and painting.

## 4. SELECT A HEIGHT

STEPLADDERS		
LADDER SIZE	APPROX. HIGHEST STANDING LEVEL	MAXIMUM REACH <sup>A</sup>
4'	1' 11"	8' 6"
5'	2' 10"	9' 5"
6'	3' 9"	10' 4"
7'	4' 9"	11' 4"
8'	5' 8"	12' 3"
10'	7' 7"	14' 2"
12'	9' 6"	16' 1"
14'	11' 5"	18'
16'	13' 4"	19' 11"
18'	15' 3"	21' 10"
20'	17' 2"	23' 8"

EXTENSION LADDERS				
LADDER SIZE	MAXIMUM EXTENDED LENGTH	MAX. REACH <sup>A</sup>	WORKING RANGE TO TOP SUPPORT*	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE*
16'	13'	15' 11"	7 ½' - 12 ½'	4 ½' - 9 ½'
20'	17'	19' 10"	9 ½' - 16 ½'	6 ½' - 13 ½'
24'	21'	23' 8"	11 ½' - 20'	8 ½' - 17'
28'	25'	27' 7"	13 ½' - 24'	10 ½' - 21'
32'	29'	31' 5"	15 ½' - 28'	12 ½' - 25'
36'	32'	34' 4"	17 ½' - 31'	14' - 28'
40'	35'	37' 3"	19' - 33 ½'	16' - 30 ½'
44'	39'	41' 1"	21' - 37 ½'	18' - 34 ½'
48'	43'	45'	23' - 41 ½'	20' - 38 ½'
60'	48'	49' 10"	23' - 46 ½'	20' - 43 ½'

► <sup>A</sup>Assumes 5' 7" person with 12" vertical reach  
► \*When set up at the proper 75 1/2° angle

**SCAN TO LEARN MORE:**

This guide is a starting point only. For complete ladder safety guidance, visit our free CLIMB Academy training.



# HOW TO SAFELY USE OUR LADDERS

AT LOUISVILLE LADDER, safety is at the heart of everything we do! Every product we design and build is crafted to meet or exceed the rigorous standards of the American National Standards Institute (ANSI), Occupational Safety and Health Administration (OSHA), and Canadian Standards Association (CSA). Before using our products, please take a moment to review the information on this page. Your safety isn't just a priority—it's our mission.



Louisville Ladder, Inc. manufactures products in compliance with the applicable safety standards of the American National Standards Institute (ANSI). There are a variety of ANSI safety standards depending on material and type of ladder. You can find a list of them in the figure below. In addition, ANSI standards have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load. See section "Select Load Capacity" on page 6 for more information on ANSI Duty Ratings.

ROLLING SCAFFOLDS	ANSI A10.8
PLANKS & STAGES:	ANSI A10.8
WOOD LADDERS:	ANSI A14.1
STEP STOOLS:	ANSI A14.11
METAL LADDERS:	ANSI A14.2
FIBERGLASS LADDERS:	ANSI A14.5
MOBILE LADDER STANDS & PLATFORM LADDERS:	ANSI A14.7
LADDER ACCESSORIES:	ANSI A14.8
ATTIC LADDERS:	ANSI A14.9



The OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION (OSHA) regulates the adequacy of ladders and the work practices followed by employees using them in two sections: Portable ladders used in General industry (1910.23) and portable ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace, and the safe use of ladders on the job. OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore, users should check with their own state OSHA representatives.



Where applicable, product meets or exceeds CANADIAN STANDARDS INSTITUTE testing requirements.

CAS: Z11



**DANGER:** Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

**SAFETY IS EVERYONE'S RESPONSIBILITY.** Even a rigidly constructed ladder can be involved in an accident if the proper precautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.

**PROPER SELECTION**

- Refer to product labels for Highest Standing Level and Working Load Capacity information.
- Select the ladder size to reach your work without climbing above the Highest Standing Level or overreaching.
- Weight of user, tools and materials shall not exceed Working Load Capacity. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs.
- Use a fiberglass or wood ladder if working with or around electricity.

**INSPECTION BEFORE EACH USE**

- Inspect before use. Do not use ladders with missing, loose, damaged, or non-operating parts.
- Make sure locks are in good working order.
- Replace heavily worn feet and illegible labels.
- Contact manufacturer for parts.
- Keep ladder and hinges clean and free of slippery substances.

**CONSIDER BEFORE EACH USE**

- Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. trestle ladders). Do not overload.
- Do not use ladders if you are in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped.
- Use help in setting up ladder, if possible.
- Ladders are not to be set up on scaffolds.
- Metal ladders conduct electricity. Keep away from wires and electrical circuits.
- Consult manufacturer for use in chemical or other corrosive environments.
- Do not use ladders in high winds or during a storm.
- Secure ladder from excessive movement (e.g. tie off, block, brace, etc.)
- Pay close attention to what you are doing.

**STEP LADDERS – Proper Set-up and Use**

- Fully open ladder and lock spreader braces.

- Set all four feet on a firm level surface. Do not place on unstable, loose or slippery surfaces.
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Maintain a firm grip. Use both hands in climbing.
- Climb only front side of ladder. Face ladder when climbing and working.
- Do not step on the top step or top cap.
- Do not straddle front and back. Do not climb from the step ladder onto another ladder or surface.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

**SINGLE & EXTENSION LADDERS – Proper Setup and Use**

- Retract ladder sections fully before lifting or moving.
- Raise and lower ladder from ground only; never from the top.
- Set ladder feet on firm, level surface and both rails against a firm support at the top.
- Make sure ladder does not lean to side. Ladder leveling devices are available for use on uneven ground.
- Do not place on unstable, loose, or slippery surfaces without securing from movement (e.g. tie off, block, brace, etc.)
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Extend fly section and secure runglocks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- Do not overextend. A minimum overlap of sections is required as follows:
  - ladder size up to and including 32'-3" overlap
  - over 32' up to and including 36'-4" overlap
  - over 36' up to and including 48'-5" overlap
  - sizes over 48'-6" overlap
- Ladder must make a 75 1/2° angle with the ground. Obtain this angle as follows:
  - Place toes against bottom of ladder side rails
  - Stand erect

- Adjust angle so you can grasp lowest ladder section with palms on the outside of the rails, arms extended straight at shoulder level
- To confirm if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- Recommend tying bottom fly rung to adjacent base rung, or engaging Quicklatch™, when available.
- Face ladder when climbing and working.
- Maintain a firm grip. Use both hands in climbing.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

**PROPER CARE AND STORAGE**

- Hang ladder on racks at intervals of 6' for support
- Never store materials on ladder
- Never drop or apply an impact load to ladder
- Securely support ladder in transit
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.
- For additional information see applicable ANSI Safety standards; A14.1-Wood; A14.2-Aluminum; A14.5-Fiberglass.

## STEPLADDERS

# PRODUCT FEATURES



### Raptor Boot™

Polypropylene copolymer upper boot protects the rails of your fiberglass ladder. Thick, non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot to create a secure, slip-resistant footing. Inside, RaptorBoot™ has a unique open design that allows for quick and easy visual inspection of the ladder's rail.



### Raptor Top™

Raptor Top™ is a versatile and durable ladder top designed to increase your productivity. It is multifunctional and includes a hardware tray, magnet tray, drill and tool slots, paint bucket holder, and pipe or 2x4-holder. The curved, ergonomic front surface of the Raptor Top™ gives you more leg room for maximum comfort. New heat transfer top with load rating.



### RaptorGoTop™

Built-in rubber bumpers protect walls when using the ladder in the leaning position while 25 integrated tool holders keep tools organized, accessible, and your hands free when climbing.



### "V" SHAPED ProTop™

The "V" shaped ProTop™ allows you to lean the ladder into corners, walls and poles. The integrated bumper protects the work surfaces and the top provides a place to put all the tools to get the job done.



### SHOX™

SHOX™ is a side rail impact absorption system that reduces damage to the lowest, first step of your ladder. This helps prolong the life of the ladder.

Pair SHOX™ with our RaptorBoot™ rail protection feature for total security and defense against wear and tear from normal use.




### Molded Pail Shelf

Our optional Molded Pail Shelf features a variety of tool slots, a drill slot, and can securely hold a paint tray or any size paint bucket.



### Double-Rivet Step Construction

Each step is secured with six semi-tubular, large-headed rivets for maximum strength. This feature gives your ladder 30% greater shear strength than solid aluminum rivets.



### Center-Pull Spreader Brace

Unique Center-Pull Spreader Brace designed for one-hand operation. Brace is steel-plated for extra durability.



### Full Metal Boot™

Extra-heavy-duty cast-aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.




### Pinch-Resistant Spreader Braces

A version of our heavy-duty spreader braces with plated steel and a double-rivet hinge to protect users from pinched fingers.



### Heavy-Duty Gusset Bracing

All our gussets are created with heavy-duty steel. The gussets are added to angle back braces and steps for extra support.



### Slip-Resistant Rubber Feet

The new overmolding process tightly bonds the polymer tread and aluminum of the shoe, increasing durability and resistance of the bottom tread against wear and tear.



### Inside Spreader Braces

Spreader braces are mounted inside the fiberglass rails of your ladder to help protect braces from getting hooked or damaged in transit.



### Wide Back Braces

Horizontal U-shaped back braces provide maximum stability and discourage unsafe climbing. The bottom back brace provides heavy-duty strength to the ladder base.

## EXTENSION LADDERS PRODUCT FEATURES



### MaxLock™ with QUICKLATCH®

The MaxLock™, exclusively from Louisville Ladder, is custom designed for injection molding from a patented, advanced engineered polymer. Maxlock™ is the strongest, toughest, lightest rung lock ever made and won't bend or twist like others in the market and it reduces rung wear during fly extension and retraction. No other rung lock can match the Maxlock™ performance. The QuickLatch™, Engaged as instructed, allows users to latch the base and fly sections together for transport and in extended positions, so you don't have inadvertent sliding of the sections.



### ProGrip™

Get a grip on your task! ProGrip's™ slip-resistant pad is integrated onto your ladder caps. This protects your support surface from damage. ProGrip™ includes easy-carry hand grips for your convenience.



### Rung-to-Rail Direct Connection

The ladder's rung passes through a punched hole in the rail, and is hydraulically crimped on both sides to form a tight, twist-resistant connection. The rung is permanently connected to and supported by the rail, giving your extension ladder rigidity and stability.



### Aluminum Plate Connection Rungs

Tempered aluminum rungs are hydraulically double-crimped to an aluminum plate. Each plate is fastened to the ladder's rails with four aluminum rivets.



### Mar-Resistant Rail End Caps

All of our rail ends (on applicable products) feature impact-resistant caps that prevent work surfaces from marring and give you the protection and durability needed for longevity.




### Solid-Aluminum Rail End Caps

Our rail ends (on 1200HD Series, and AE1660) feature extra-heavy-duty cast-aluminum caps to give your ladder the protection and durability needed for longevity.



### Modified I-Beam

Side rails are full 3" extrusions shaped into a modified I-beam for lightweight strength. Interlocking rails keep fly and base sections from separating.



### D-Shaped Rungs

The flat top, D-shaped rung provides a greater standing area than round rungs. They are fully serrated to give you a slip-resistant standing surface.



### Outside Slide Guides

Two extra-heavy-duty outside slide guides are secured to the top of your extension ladder's base section with four rivets per guide.



### Double Rope & Pulley

All aluminum double pulley systems come with a rot-resistant manila rope for excellent performance in any conditions.




### Round Rungs

Round, tempered aluminum rungs are fully serrated for a slip-resistant surface. Each rung end is hydraulically double-crimped to your ladder's side rail.



### Full I-Beam

Side rails are extra-heavy-duty 3" I-beam extrusions for maximum strength.



### Swivel Safety Shoes

Heavy-duty overmolding process tightly bonds shoe with polymer tread material, which reduces wear and tear from every day use while increasing the footprint. The shoe can be used with the tread down or in a spiked position.



### Full Metal Boot™

Extra-heavy-duty cast aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.

## EXTENSION LADDERS ACCESSORIES

PK-E03A, B, & C



### Combination Pole Grip & Cable Hook

**FIBERGLASS ONLY.** A rigid steel-plated V-shaped pole grip covered with rubber tread, combined with cable hook assembly.

FACTORY	FIELD	PK-E03A (16'-28')	APPROX. WEIGHT
E03		PK-E03B (32'-40')	3 LBS
		*PK-E03C (16'-40')	3 LBS
		PK-E03D (16'-28')	2.7 LBS
			3 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.

\*PK-E03C: L-3421-XX and L-3025-XX  
Manufactured before 9-2019

\*FE7200 & FE4200HD series, ladder size does not apply.  
Use part numbers PK-E03A

PK-E03D



### Rounded End Caps

**FIBERGLASS ONLY.** Covered in durable, rugged plastic, these round metal ends protect your support surface from damage.

FACTORY	FIELD	PK-E62 (16'-40')	APPROX. WEIGHT
E62			1.9 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.



### Rigid Pole Grip

**FIBERGLASS ONLY.** 3/16" x 1" steel-plated bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.

FACTORY	FIELD	PK-E04A (16'-28')	APPROX. WEIGHT
E04		PK-E04B (32'-40')	1.9 LBS
			1.7 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.

\*FE7200 & FE4200HD series, ladder size does not apply.  
Use part numbers PK-E04A



### "V" SHAPED ProTop™

**FIBERGLASS ONLY.** A multifunctional top designed to increase productivity. Can be leaned on walls, poles, and into corners. Featuring: corner grip, pole grip, integrated bumper, tool tether anchor attachment points and work tray; all compact and accessible in a spacious design.

FIELD	PK-1243	APPROX. WEIGHT
		3 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600 series.



### Web Pole Grip

**FIBERGLASS ONLY.** Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Allows top of ladder to lean against poles & pipes.

FACTORY	FIELD	PK-E05R (16'-40')	APPROX. WEIGHT
E05			0.7 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.



### Side Mounted Double Pulley System

Thick rope and double pulley system for added ease of use.

FACTORY	FIELD	PK-1113 (16'-40')	APPROX. WEIGHT
E64			4.3 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.



### Ladder Lash

**FIBERGLASS ONLY.** Lash for wrapping around objects up to 17" in diameter. Made of 2" Dacron webbing with forged steel snaps and a quick adjustment with clip.

FACTORY	FIELD	PK-E11R (16'-40')	APPROX. WEIGHT
E11			1.1 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.




### Ladder Stabilizer (Fixed/Adjustable)

Fits extension and single ladders with rail up to 4" x 1 3/4". Holds ladder 12" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra-heavy-duty rubber tips. Adjustable Stabilizer has aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows.

MODEL NUMBER	FIXED: LP-2200-00	APPROX. WEIGHT
	ADJUSTABLE: LP-2210-00	6 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



### Wheel Spurs

**FIBERGLASS ONLY.** Wheel spurs are available as an alternative to our standard cast swivel safety shoe.

**FACTORY** **FIELD** PK-E30A (16'-28') **APPROX. WEIGHT** 0.9 LBS  
E30

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.




### Ladder Jack (Short/Long Body)

Short body ladder jacks (1 pair) span 2 extension ladder rungs. Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.

**MODEL NUMBER** SHORT BODY: LP-2100-23 **APPROX. WEIGHT** 14 LBS  
LONG BODY: LP-2100-13 **APPROX. WEIGHT** 16 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600 series.




### Combination Spur & Shoe

**FIBERGLASS ONLY.** This accessory allows the use of either a spur or a shoe with thick rubber tread.

**FACTORY ONLY**  
E38

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD series.



### Levelok® Ladder Stabilizer & Leveler

**KEYLOK® QUICK CONNECT SYSTEM.** The Levelok® is one of the easiest to use ladder levelers in the market. It can be installed on almost any fiberglass or aluminum extension ladder, and can be operated using only your foot – freeing your hands to hold the ladder.

**FACTORY** **FIELD** LP-2220-01 **APPROX. WEIGHT** 8 LBS  
E59

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE4200 series.



### Spurs & Shoes With Aluminum Sleeve

**FIBERGLASS ONLY.** This accessory allows the use of either a spur or a shoe with thick rubber tread. The NEW aluminum sleeve is 10 1/2" long.

**FACTORY ONLY** **APPROX. WEIGHT** 3.8 LBS  
E63



### Automatic-Adjusting Leveler

Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.

**FACTORY** **FIELD** PR091006C-B-PY **APPROX. WEIGHT** 6.3 LBS  
E34

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



### ProGuards™

ProGuards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™. patent #6,499,563 B1

**MODEL NUMBER** LP-5510-00 **APPROX. WEIGHT** 1.4 LBS

**COMPATIBLE WITH:** FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



### Pail Shelf Step Ladder Accessory

**ONLY FOR STEP LADDERS.** Fits all Louisville/Davidson brand step ladders. Detailed instructions and supplied hardware make installation easy.

**MODEL NUMBER** LP-2400-00 **APPROX. WEIGHT** 1.5 LBS



### Pinnacle Gate

Our optional gate provides full contact on all 4 sides, permitting 360° work access.

**FIELD** LP-2807-80 **APPROX. WEIGHT** 5.75 LBS

**COMPATIBLE WITH:** FXP1800HD, FXP1700XL, FXP1700, FCP1400HD series.



# STEP LADDERS

## FIBERGLASS

FOR APPLICATIONS THAT DEMAND  
THE TESTED, TRIED, AND TRUE.

FS1406HD



SERIES  
**FS1400HD**  
FIBERGLASS STEPLADDER



1. **Raptor Top™** – multiple tool slots & magnet for increased productivity.
2. Inside spreader braces.
3. Wide back braces.



TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**— Heavy duty boot protects fiberglass.
6. Riveted step construction with gussets.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1404HD	4'	8' 6"	19 9/16"	29"	15	3.7'
FS1406HD	6'	10' 5"	22 9/16"	41"	21	6.3'
FS1408HD	8'	12' 3"	25 9/16"	52"	28	9.7'
FS1410HD	10'	14' 2"	28 9/16"	65"	42	13.2'
FS1412HD	12'	16' 1"	31 9/16"	76"	49	17.4'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

FS1506



SERIES  
**FS1500**  
FIBERGLASS STEPLADDER



1. **Raptor Top™** – multiple tool slots & magnet for increased productivity.
2. Wide back braces
3. Inside spreader braces



TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

4. Double-rivet step construction
5. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
6. **Raptor Boot™**— Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1502**	2'	8' 9"	17"	20"	8	2'
FS1504	4'	8' 6"	19 9/16"	29"	14	3.7'
FS1505	5'	9' 5"	21 1/16"	36"	17	4.8'
FS1506	6'	10' 5"	22 9/16"	41"	20	6.3'
FS1507	7'	11' 4"	24 1/16"	47"	22	7.8'
FS1508	8'	12' 3"	25 9/16"	53"	26	9.5'
FS1510	10'	14' 2"	28 9/16"	66"	38	13.1'
FS1512	12'	16' 1"	31 9/16"	77"	47	17.5'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*FS1502 is a folding step stool and is not equipped with the RaptorTop or molded pail shelf
- ▶ Add suffix -SS1 to model number for optional molded Pail Shelf. Not available on model FS1502.
- ▶ Product color may vary and are subject to change.

FS1502

L-3016-06



SERIES  
**L-3016**  
FIBERGLASS STEPLADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



1. Raptor Top™ — multiple tool slots & magnet for increased productivity.
2. Slip-resistant boot.



3. Inside spreader braces.
4. Heavy-duty gusset bracing.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3016-04	4'	8' 6"	18 13/16"	28"	14	1.8'
L-3016-06	6'	10' 4"	21 13/16"	41"	19	5.2'
L-3016-08	8'	12' 3"	24 13/16"	53"	26	8'
L-3016-10	10'	14' 2"	27 13/16"	65"	36	11.3'
L-3016-12	12'	16' 1"	30 13/16"	77"	47	15'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Add suffix -S51 to model number for optional molded Pail Shelf. Available on all sizes and most step models
- ▶ Product color may vary and are subject to change.

FS2006



SERIES  
**FS2000**  
FIBERGLASS STEPLADDER

TYPE I  
**250** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



1. ProTop™ — multiple tool slots for increased productivity.
2. Pinch-resistant spreader braces.
3. SHOX™ — Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS2004	4'	8' 6"	18 13/16"	29"	12	3.6'
FS2005	5'	9' 5"	20 5/16"	35"	15	4.8'
FS2006	6'	10' 4"	21 13/16"	41"	17	6.2'
FS2008	8'	12' 3"	24 13/16"	52"	22	9.3'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*FS2002 is a folding step stool and is not equipped with the ProTop or molded pail shelf
- ▶ Add suffix -S51 to model number for optional molded Pail Shelf. Not available on model FS2002.
- ▶ Product color may vary and are subject to change.

FS4006



SERIES  
**FS4000**  
FIBERGLASS STEPLADDER

TYPE II  
**225** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



1. ProTop™ — multiple tool slots for increased productivity.\*
2. Pinch-resistant spreader braces.
3. SHOX™ — Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS4004	4'	8' 6"	18 13/16"	29"	11	3.3'
FS4005	5'	9' 5"	21 13/16"	35"	14	4.4'
FS4006	6'	10' 4"	23 5/16"	41"	16	5.7'
FS4008	8'	12' 3"	24 13/16"	53"	21	8.5'


- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*ProTop does not have magnet feature on FS4000 series
- ▶ Add suffix -S51 to model number to order optional Molded Pail Shelf
- ▶ Product color may vary and are subject to change.

FS1306HD



SERIES  
**FS1300HD**  
FIBERGLASS STEPLADDER

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge metal top with tool slots.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. Full metal boot with thick rubber thread.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1304HD	4'	8' 6"	19.42"	29"	19	2.1'
FS1306HD	6'	10' 4"	22.42"	41"	22	3.5'
FS1308HD	8'	12' 3"	25.42"	54"	25	5.2'
FS1310HD	10'	14' 2"	28.42"	66"	28	7.1'
FS1312HD	12'	16' 1"	31."	77"	31	9.2'


- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

FM1406HD



SERIES  
**FM1400HD**  
FIBERGLASS TWIN FRONT LADDER

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge metal top.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1404HD	4'	8' 6"	19 9/16"	37"	19	4.7'
FM1406HD	6'	10' 4"	22 9/16"	52"	26	8.3'
FM1408HD	8'	12' 3"	25 9/16"	67"	37	12.3'
FM1410HD	10'	14' 2"	28 9/16"	82"	56	17.1'
FM1412HD	12'	16' 1"	31 9/16"	97"	72	23.1'
FM1414HD**	14'	18'	34 9/16"	112"	85	29.1'
FM1416HD**	16'	19' 11"	37 9/16"	127"	96	36'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.
- ▶ \*\*14'-16' duty rating exceeds OSHA standards.
- ▶ Product color may vary and are subject to change.

FM1506




SERIES  
**FM1500**  
FIBERGLASS TWIN FRONT LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge steel hinges.
2. Inside spreader braces.
3. Double-rivet step construction.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1503	3'	7' 6"	18 1/16"	31"	14	3.3'
FM1504	4'	8' 6"	19 9/16"	38"	19	4.7'
FM1506	6'	10' 5"	22 9/16"	54"	25	8.0'
FM1508	8'	12' 3"	25 9/16"	68"	34	12.1'
FM1510	10'	14' 2"	28 9/16"	83"	44	16.8'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.
- ▶ Product color may vary and are subject to change.



# PINNACLE

GET MORE ROOM TO GET MORE DONE.

SERIES


**FXP1800HD**

FIBERGLASS PINNACLE  
PLATFORM LADDER

TYPE IAA

**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

FXP1804HD



1. **ProTop™** — multiple tool slots for increased productivity.



2. Larger platform for added comfort.



3. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.



4. **Raptor Boot™**— Heavy duty boot protects fiberglass.

**19% LARGER PLATFORM** vs. other leading ladders.

**WAIST-HIGH HANDRAIL** at tool belt height for added comfort.

**WORK FACING MULTIPLE DIRECTIONS**

It is not recommended that worker face ladder steps while on platform.

**HEAT TRANSFER TOP**

No more OSHA fines due to missing duty rating labels. Scratch and UV resistant.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1802HD	1' 11"	3"	8' 6"	21 7/8"	36"	19	8'
FXP1803HD	2' 10"	3"	9' 5"	23 3/8"	42"	23	10.4'
FXP1804HD	3' 9"	3"	10' 5"	24 7/8"	48"	26	12.8'
FXP1806HD	5' 8"	3"	12' 3"	27 7/8"	62"	32	18.4'
FXP1808HD	7' 7"	3"	14' 2"	30 7/8"	74"	49	24.7'
FXP1810HD**	9' 6"	3"	16' 1"	33 7/8"	88"	64	32'
FXP1812HD**	11' 5"	3"	18'	36 7/8"	102"	76	40.1'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Special duty: manufacturer tested to 375 lbs.
- ▶ Product color may vary and are subject to change.

SERIES


**FXP1700**

FIBERGLASS PINNACLE  
PLATFORM LADDER

TYPE IA

**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

FXP1704



1. **ProTop™** — multiple tool slots for increased productivity.



2. Larger platform for added comfort.



3. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.



4. **Raptor Boot™**— Heavy duty boot protects fiberglass.

**WIDE PLATFORM**

Larger than other ladders in its class.

**PERFECT TOOL BELT HEIGHT**

Puts every tool on your tool belt within reach.

**WORK FACING MULTIPLE DIRECTIONS**

It is not recommended that worker face ladder steps while on platform.

**HEAT TRANSFER TOP**

No more OSHA fines due to missing duty rating labels. Scratch and UV resistant.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1702	1' 11"	3"	8' 6"	21 3/4"	32"	16	7.4'
FXP1703	2' 10"	3"	9' 5"	23 1/4"	38"	22	9.6'
FXP1704	3' 9"	3"	10' 5"	24 3/4"	44"	26	12'
FXP1706	5' 8"	3"	12' 3"	27 3/4"	56"	30	17.3'
FXP1708	7' 7"	3"	14' 2"	30 3/4"	70"	44	23.6'
FXP1710	9' 6"	3"	16' 1"	33 3/4"	82"	59	30.7'
FXP1712	11' 5"	3"	18'	36 3/4"	92"	71	38.7'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.



**2-IN-1**  
DESIGN

for Standing and Leaning



# LEANING LADDERS

AN INNOVATION THAT'S UNRIVALED FROM THE TOP DOWN.

FCP1404HD



TYPE IAA  
**375** LBS.  
 LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



SERIES  
**FCP1400HD**

FIBERGLASS  
 PLATFORM TO LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - Includes multiple tool slots, and two tool tether anchor attachment points for increased productivity.



3. Larger Platform - Spacious platform allows for more secure, comfortable movement. Overflow slots keep the surface clear.



4. Waist-High Handrail - 36" heavy-duty handrail runs from platform to peak providing a secure 3-sided barrier.



5. **Raptor Boot™** - Heavy-duty boot protects fiberglass.



6. **SHOX™** - Advanced impact absorption protects fiberglass rails against damage.

MODEL	PLATFORM HEIGHT	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	HIGHEST STANDING LEVEL	MAX. REACH*
FCP1402HD	1' 11"	21 15/16"	30"	23	8.8'	1' 11"	8' 6"
FCP1403HD	2' 10"	23 15/16"	36"	27	11.4'	2' 10"	9' 5"
FCP1404HD	3' 10"	25 7/16"	41"	34	14.1'	3' 10"	10' 5"
FCP1406HD	5' 8"	28 3/8"	54"	40	20.1'	5' 8"	12' 3"
FCP1408HD	7' 7"	31 5/8"	66"	53	27.2'	7' 7"	14' 2"

\*Assumes 5' 7" person with 12" vertical reach  
 ▶ Product color may vary and are subject to change.

FXS1406HD



SERIES

**FXS1400HD**


FIBERGLASS STEP TO LEANING LADDER




1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.




2. **ProTop™** - with "V" shape to fit into corners, includes magnet.



3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.



5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELF LADDER		STEP LADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FXS1404HD	4'	20 5/16"	24"	16	4.0'	11"	7' 6"	1' 11"	8' 6"
FXS1406HD	6'	23 5/16"	36"	22	6.8'	2' 10"	9' 5"	3' 9"	10' 5"
FXS1408HD	8'	26 5/16"	48"	30	10.1'	4' 9"	11' 4"	5' 8"	12' 3"
FXS1410HD	10'	29 5/16"	60"	38	14.0'	6' 8"	13' 3"	7' 7"	14' 2"
FXS1412HD	12'	32 5/16"	71"	46	18.5'	8' 6"	15' 1"	9' 6"	16' 1"

► \*Assumes 5' 7" person with 12" vertical reach  
► Product color may vary and are subject to change.

FXS1506



SERIES

**FXS1500**


FIBERGLASS STEP TO LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - with "V" shape to fit into corners, includes magnet.



3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.



5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELF LADDER		STEP LADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FXS1504	4'	20 5/16"	24"	15	4.0'	11"	7' 6"	1' 11"	8' 6"
FXS1506	6'	23 5/16"	36"	20	6.8'	2' 10"	9' 5"	3' 9"	10' 5"
FXS1508	8'	26 5/16"	48"	27	10.1'	4' 9"	11' 4"	5' 8"	12' 3"
FXS1510	10'	29 5/16"	59"	38	14.0'	6' 8"	13' 3"	7' 7"	14' 2"
FXS1512	12'	32 5/16"	71"	46	18.5'	8' 6"	15' 1"	9' 6"	16' 1"

► \*Assumes 5' 7" person with 12" vertical reach  
► Product color may vary and are subject to change.

# CROSS XSTEP GO

**2 IN 1**  
**LEANABLE LADDER**

- CLOSER TO YOUR WORK
- LESS OVERREACHING
- LESS TRIPS TO THE TRUCK
- MORE CONFIDENCE TO GET THE TASK DONE



TYPE IA  
**300** LBS.  
 LOAD CAPACITY  
 INCLUDES WEIGHT OF USER PLUS MATERIALS

SERIES  
**FGS1400HD**

FIBERGLASS  
 STEP TO LEANING LADDER



**STEPLADDER**



**LEANING LADDER**



1. **RaptorGoTop™**  
 Rubber bumpers allow you to lean ladder on walls



2. **SECURITY**  
 locking latch to secure rear section



3. **STABILITY**  
 raptorgoboot™ - curved, heavy duty, slip-resistant shoe that adapts to the angle of work



4. **PRACTICAL DESIGN**  
 keep tools close and your hands free with the RaptorGoTop™




5. **SPACE SAVING DESIGN**  
 fit into smaller spaces (4ft - 8ft only)



6. **DURABILITY**  
 SHOX™ - advanced impact absorption protects fiberglass rails against damage

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELFLADDER		STEPLADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FGS1404	4'	20 1/2"	28 1/8"	14	3.6'	11"	7' 6"	1' 11"	8' 6"
FGS1405	5'	22"	34 1/16"	16.7	4.8'	1' 11"	8' 6"	2' 10"	9' 5"
FGS1406	6'	23 1/2"	40"	19.5	6.2'	2' 10"	9' 5"	3' 10"	10' 4"
FGS1407	7'	25"	45 15/16"	22.5	7.6'	3' 10"	10' 4"	4' 9"	11' 3"
FGS1408	8'	26 1/2"	51 7/8"	26	9.2'	4' 9"	11' 3"	5' 8"	12' 3"
FGS1410	10'	29 1/4"	64 1/4"	36.5	12.7'	6' 8"	13' 2"	7' 7"	14' 2"
FGS1412	12'	32 1/4"	77 7/16"	45.6	16.8'	8' 6"	15' 1"	9' 6"	16' 1"

▶ \*Assumes 5' 7" person with 12" vertical reach  
 ▶ Product color may vary and are subject to change.

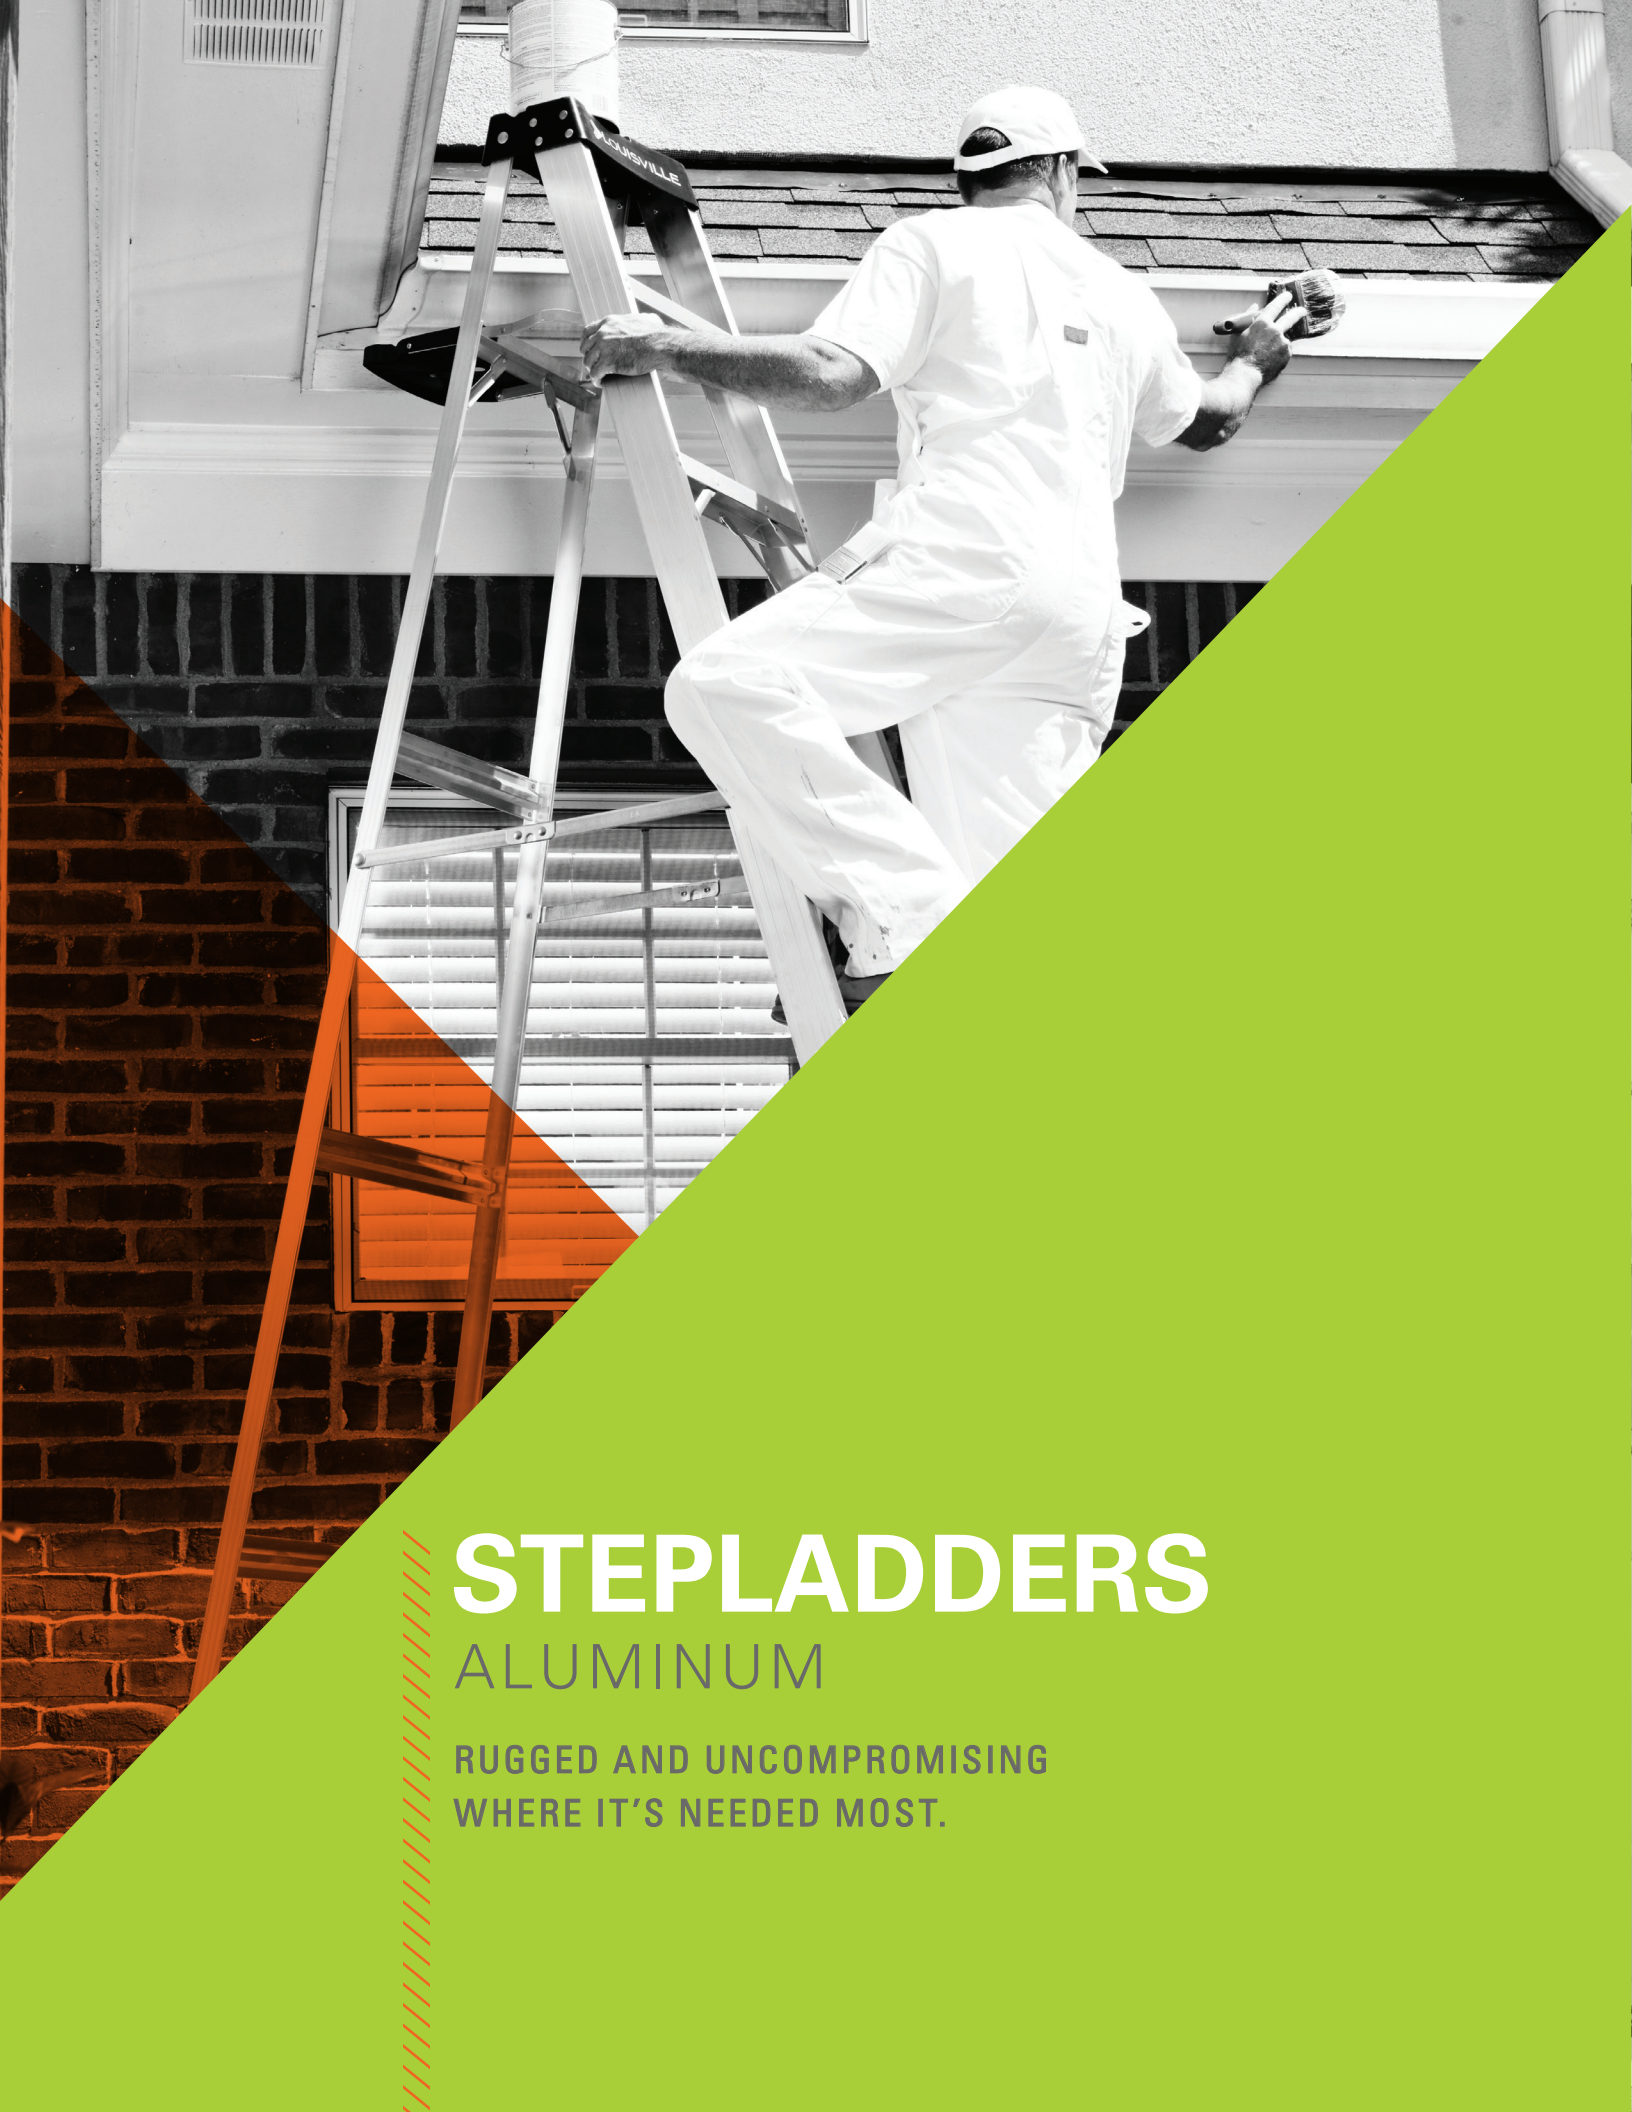

# STEPLADDERS

ALUMINUM

RUGGED AND UNCOMPROMISING  
WHERE IT'S NEEDED MOST.

AS3006



ALSO AVAILABLE  
**AS3002**  
FOLDING STEP STOOL

SERIES  
**AS3000**  
ALUMINUM STEP LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™**—multiple tool slots for increased productivity.
2. Molded pail shelf\*\*.
3. Center-pull spreader braces\*\*\*.



4. Heavy-duty gusset bracing.
5. Slip-resistant rubber feet.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS3002**	2'	8' 8"	16 5/8"	20 1/2"	6	1.5'
AS3004	4'	8' 6"	18 5/8"	29"	13	4.1'
AS3006	6'	10' 5"	21 5/8"	40"	17	6.9'
AS3008	8'	12' 3"	24 5/8"	53"	23	10.3'
AS3010	10'	14' 2"	27 5/8"	65"	29	14.4'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*AS3002 is a folding step stool and is not equipped with the molded pail shelf
- ▶ \*\*\*Center-pull spreader is only available on 4' & 6' models—those outside spreader brace otherwise

AS2106



SERIES  
**AS2100**  
ALUMINUM STEP LADDER

TYPE I  
**250** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™** — multiple tool slots for increased productivity.
2. Molded pail shelf.
3. Pinch-resistant spreader braces.



4. Steel gusset bracing.
5. Slip-resistant rubber feet.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS2104	4'	8' 6"	18 5/8"	28"	11	3.8'
AS2106	6'	10' 4"	21 5/8"	40"	15	6.7'
AS2108	8'	12' 3"	24 5/8"	52"	22	9.6'
AS2110	10'	14' 2"	27 5/8"	64"	27	13.5'

- ▶ \*Assumes 5' 7" person with 12" vertical reach

AS4006




SERIES  
**AS4000**  
ALUMINUM STEP LADDER

TYPE II  
**225** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



1. Molded top with handyman's tool slots.
2. Molded pail shelf.
3. Pinch-resistant spreader braces.




4. Steel gusset bracing.
5. Slip-resistant rubber feet.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS4004	4'	8' 6"	17 15/16"	28"	10	3.1'
AS4006	6'	10' 5"	20 9/16"	40"	13	5.2'
AS4008	8'	12' 3"	23 3/16"	51"	17	8.3'

▶ \*Assumes 5' 7" person with 12" vertical reach

AP5006



SERIES  
**AP5000**  
ALUMINUM MOBILE  
PLATFORM LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



1. Top rail guard.
2. Handrails.
3. Slip-resistant platform.



4. Double-rivet step construction.
5. Heavy-duty gusset bracing.

6. **BODYWEIGHT**  
ACTIVATED CASTER TECHNOLOGY

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP5004	3' 10"	10' 5"	24 1/4"	44"	42	13'
AP5006	5' 8"	12' 3"	27 1/4"	56"	56	19'
AP5008	7' 7"	14' 2"	30 1/4"	67"	68	27'
AP5010	9' 6"	16' 1"	33 1/4"	80"	82	34.6'

▶ \*Assumes 5' 7" person with 12" vertical reach  
▶ All casters are 3" size



# STEP STOOLS

BRING EVERYTHING WITHIN REACH

**FY8002**



SERIES  
**FY8000**  
FIBERGLASS INDUSTRIAL  
STEP STAND

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



- Raptor Top™**— with slip resistant tread to stand on.
- Large heavy duty metal shoe with slip-resistant rubber tread.
- Heavy duty inside spreader brace.



- 6" step depth with slip-resistant tread.
- Heavy duty steel double rivet gussets
- Optional casters (S55) and handle (S56)\*\*.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FY8001**	1'	14" x 9 1/4"	7' 8"	6"	15 3/4"	16"	8	1.8'
FY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/4"	21"	13	2.8'
FY8003	2' 09"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	18	4.6'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Casters (S55) and handle (S56) option not available for FY8001 model
- ▶ \*\*Does not meet CSA
- ▶ To purchase FY8002 with both options (casters and handle), use suffix FY8002-S55S56
- ▶ Product color may vary and are subject to change.

**L-3042-03**



SERIES  
**L-3042**  
FIBERGLASS MINI  
WORKING PLATFORM

TYPE IAA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



- 12" Wide slip-resistant standing surface.
- Easy-use locking hinge.
- Durable handle for easy transportation.



- Slip-resistant rubber feet.
- Durable non-conductive fiberglass rails.

MODEL	HEIGHT TO PLATFORM	MAX. REACH*	WORK AREA	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3042-03	21"	8' 4"	3' x 12"	16 1/4"	48"	12	2.2'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

**AY8002**



SERIES  
**AY8000**  
ALUMINUM INDUSTRIAL  
STEP STAND

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



- Raptor Top™**— with slip-resistant tread to stand on.
- Large heavy duty metal shoe with slip-resistant rubber tread.
- Heavy duty inside spreader brace.



- 6" step depth with slip-resistant tread.
- Heavy duty steel double rivet gussets.
- Optional casters (S55) and handle (S56)\*\*.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AY8001**	1'	14" x 9 1/4"	7' 8"	6"	15 3/4"	16"	8	1.8'
AY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/4"	21"	13	2.6'
AY8003	2' 9"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	19	4.2'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Casters (S55) and handle (S56) option not available for AY8001 model
- ▶ \*\*Does not meet CSA
- ▶ To purchase AY8002 with both options (casters and handle), use suffix AY8002-S55S56

**L-2011-03**



SERIES  
**L-2011**  
ALUMINUM  
STOCKING STOOL

TYPE IAA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*



- Portable casters provide easy transportation.
- 24" Tall handrail for support, providing good balance & stability.
- Large slip resistant rubber standing steps.



- Large footing with slip-resistant tread for stability.
- Two locking hinges on the handrail visually show if the top is secure in the open position.
- Folds to store in tight spaces.

MODEL	LADDER SIZE	PLATFORM HEIGHT	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2011-02	2 STEP	1' 5"	8' 0"	21"	23"	18	2.2'
L-2011-03	3 STEP	2' 2"	8' 9"	22"	34"	22	3.3'
L-2011-04	4 STEP	2' 11"	9' 6"	22 1/2"	44"	25	4.2'

- ▶ \*Assumes 5' 7" person with 12" vertical reach

INDUSTRIAL USE • INDUSTRIAL USE • INDUSTRIAL USE • INDUSTRIAL

# QWIK STEP

LIGHTWEIGHT & COMPACT  
STEP STOOL

TYPE IAA


**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

SERIES

**L-4461**STEEL  
STEP STOOLANSI  
A14.5OSHA  
1910.67

### 1. LIGHTWEIGHT & EASY TO CARRY

Lightweight design and ergonomic handle make this ideal for on-the-go use.



### 2. COMPACT DESIGN

Only 2 inches thick for effortless storage when not in use.



### 3. HEAVY DUTY CONSTRUCTION

Made of steel to support up to 375 lbs.



### 4. SPACIOUS PLATFORM

Large platform with slip resistant tread.



### 5. SLIP RESISTANT SHOES

Provides slip resistant grip and protects your floors from damage.


L-4461-02



MODEL	LADDER SIZE	HEIGHT TO PLATFORM	MAX REACH*	PLATFORM DIMENSIONS	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	STORAGE DEPTH
-------	-------------	--------------------	------------	---------------------	--------------	----------------	----------------------	---------------

L-4461-02	2 STEP	1' 6"	8' 1"	13 3/4" W	1' 5 3/4"	2'	10	2"
-----------	--------	-------	-------	-----------	-----------	----	----	----

► \*Assumes 5' 7" person with 12" vertical reach

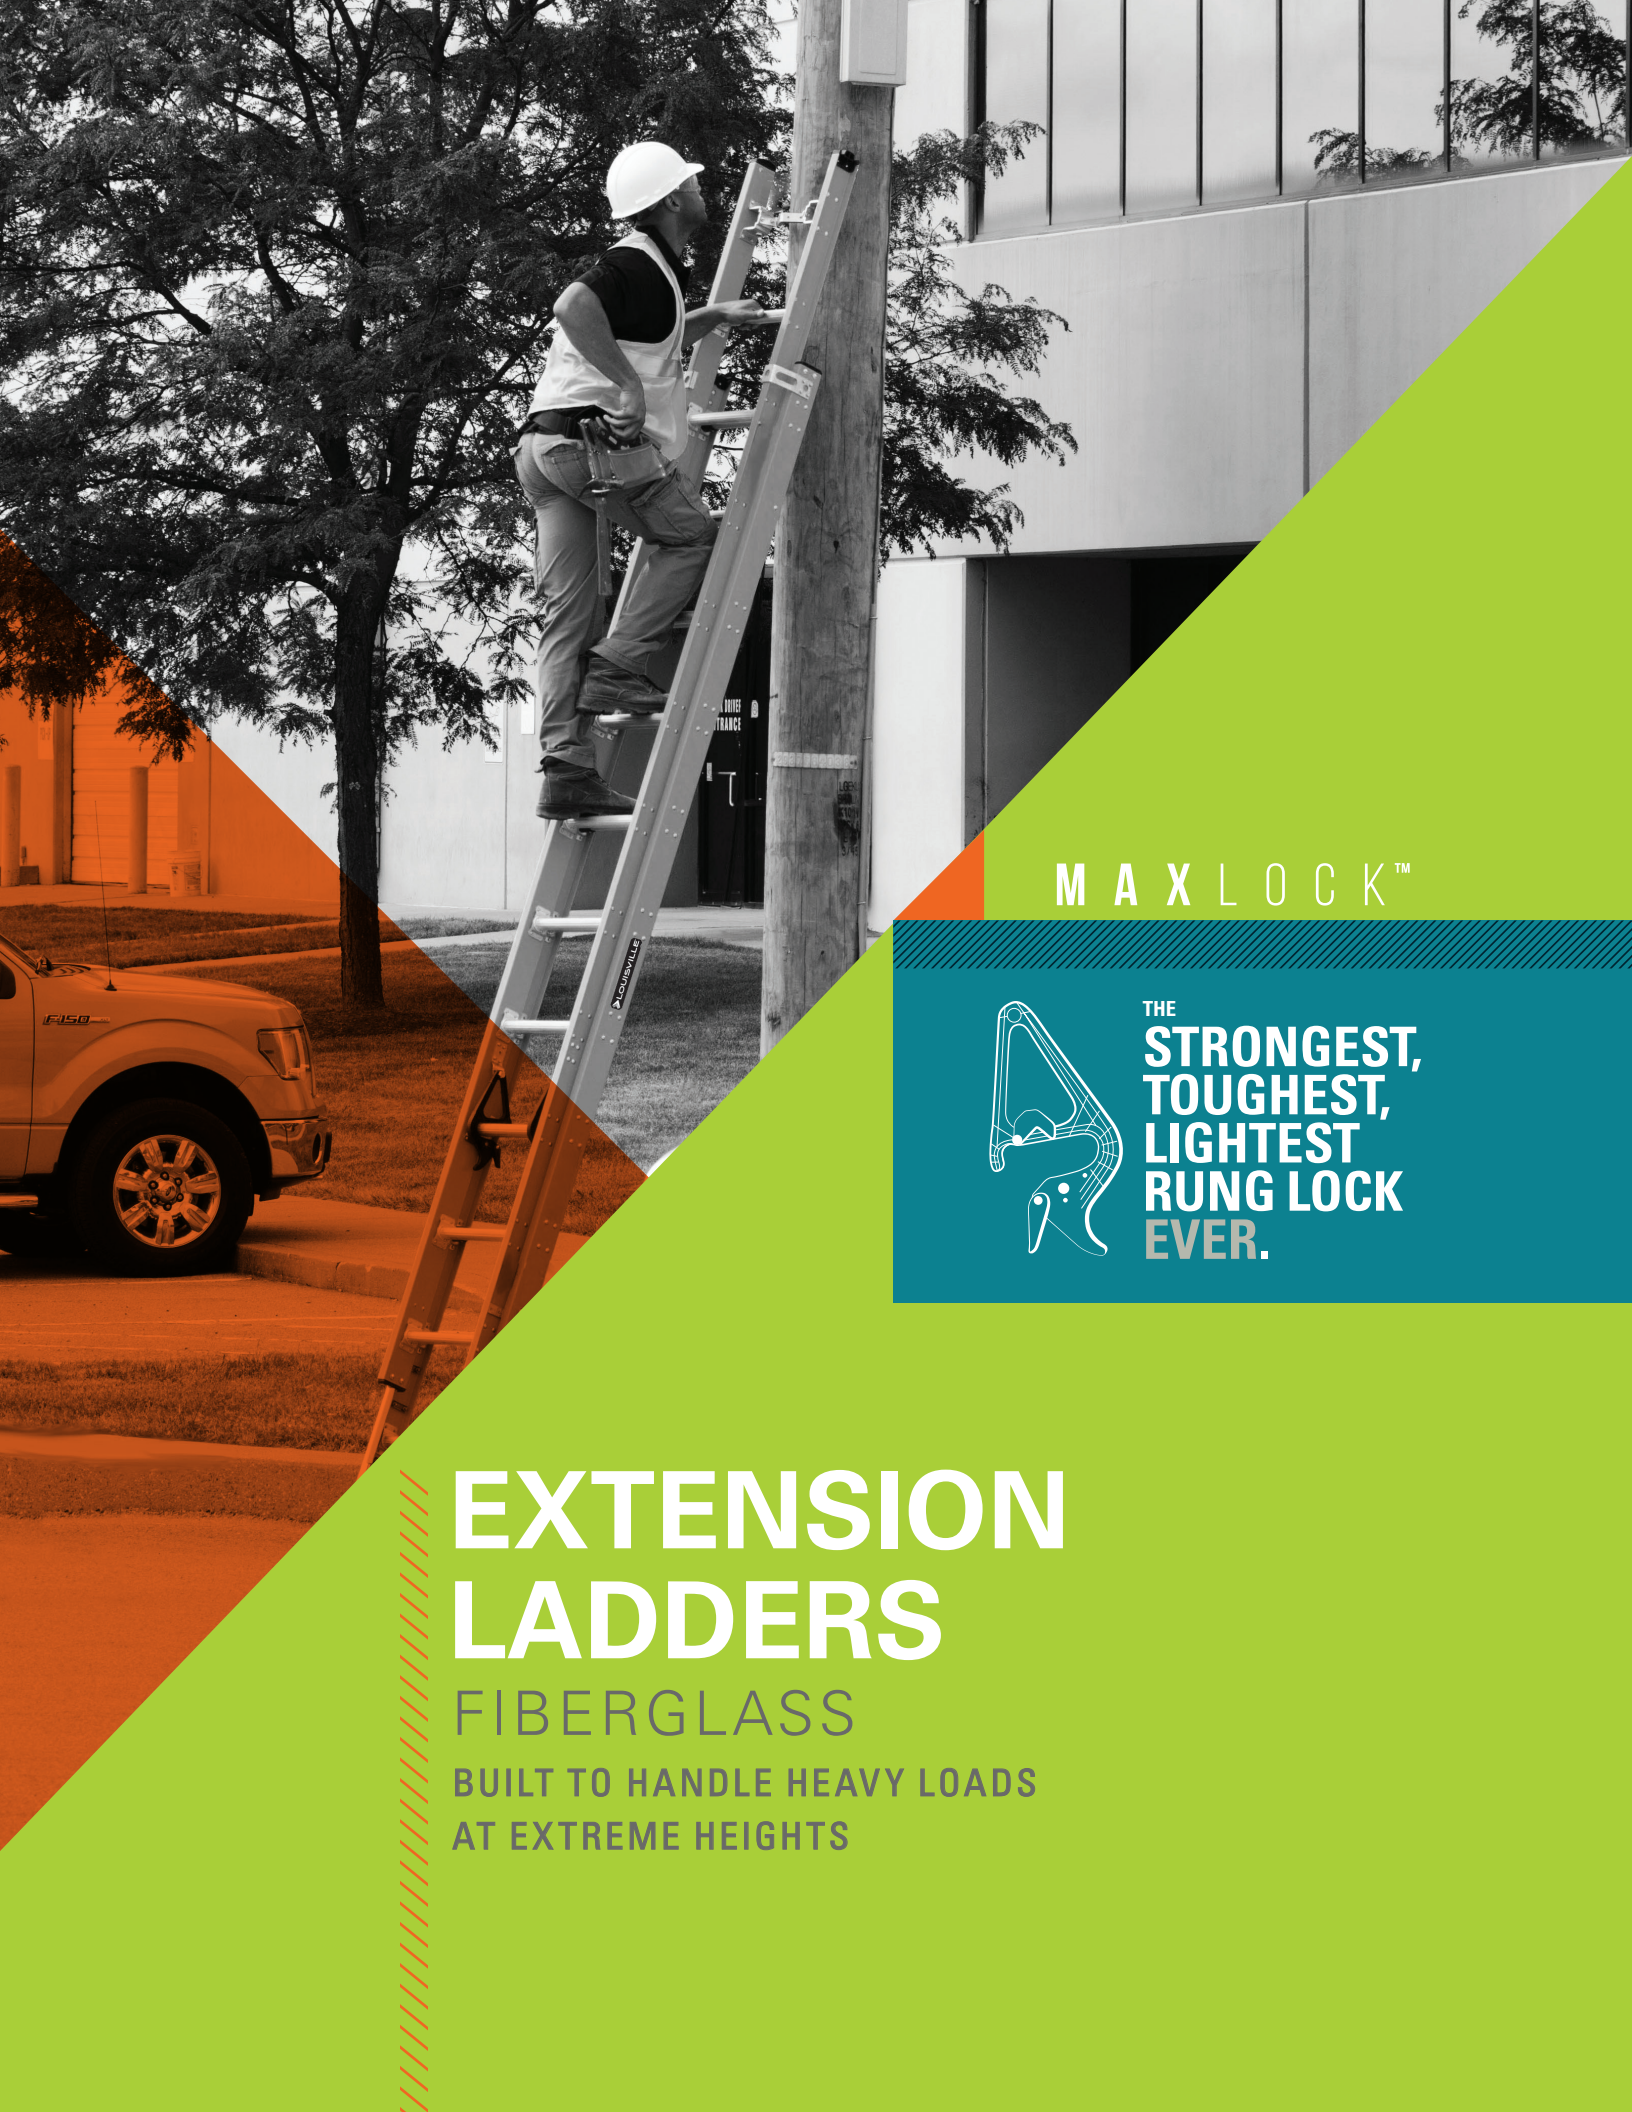

MAX LOCK™



THE  
**STRONGEST,  
TOUGHEST,  
LIGHTEST  
RUNG LOCK  
EVER.**

# EXTENSION LADDERS

FIBERGLASS

BUILT TO HANDLE HEAVY LOADS  
AT EXTREME HEIGHTS

FE4220HD



SERIES  
**FE4200HD**  
FIBERGLASS EXTENSION  
LADDER

TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. Aluminum rung connector plates.



4. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.

**MAXLOCK™**  
▶ D-shaped rungs

RAIL DEPTH	
16-28' models	3 1/4"
32' model	3 11/16"
STACK HEIGHT	
16-28' models	6"
32' model	6 1/16"
INSIDE WIDTH	
base	15 3/8"
fly	13 11/16"
OUTSIDE WIDTH	
base	17 3/4"
fly	16 1/16"

D-RUNG MODELS	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE4216HD**	16'	8'	13'	15' 11"	41	7.6'
FE4220HD	20'	10'	17'	19' 10"	50	9.5'
FE4224HD	24'	12'	21'	23' 8"	58	11.2'
FE4228HD	28'	14'	25'	27' 7"	67	13.1'
FE4232HD	32'	16'	29'	31' 5"	73	14.8'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Available in D-shaped or round rungs. Does not include rope and pulley
- ▶ \*\*\*Special order item
- ▶ Product color may vary and are subject to change.

L-3022-20PT



SERIES  
**L-3022-XXPT**  
FIBERGLASS EXTENSION  
LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™** — V-shaped top with multiple tool slots.
2. Outside slide guides.
3. D-shaped rungs.



4. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.
6. Direct rung - rail connection.

**MAXLOCK™**  
▶ D-shaped rungs

RAIL DEPTH		INSIDE WIDTH		BASE		FLY	
20-28' models	3 1/4"	20-28' models	14 11/16"	14 11/16"	13 11/16"	13 11/16"	13 11/16"
32' model	3 5/16"	32' model	15 5/16"	15 5/16"	14 5/16"	14 5/16"	14 5/16"
STACK HEIGHT		OUTSIDE WIDTH		BASE		FLY	
16-28' models	6 1/4"	20-28' models	17 1/16"	17 1/16"	16 1/16"	16 1/16"	16 1/16"
32-40' models	6 1/2"	32' model	17 11/16"	17 11/16"	16 11/16"	16 11/16"	16 11/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	19' 10"	44	9.8'
L-3022-24PT	24'	12'	21'	23' 8"	53	11.6'
L-3022-28PT	28'	14'	25'	27' 7"	60	13.5'
L-3022-32PT	32'	16'	29'	31' 5"	70	13.5'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

FE3220



SERIES  
**FE3200**  
FIBERGLASS EXTENSION  
LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps
2. Outside slide guides
3. D-shaped rungs



4. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.
6. Direct rung - rail connection

**MAXLOCK™**  
▶ D-shaped rungs

RAIL DEPTH	
16-28' models	3 1/4"
32' model	3 5/16"
32-40' models	3 11/32"
TACK HEIGHT	
16-28' models	6 1/4"
32-40' models	6 1/2"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3216**	16'	8'	13'	15' 11"	31	7.8'
FE3220	20'	10'	17'	19' 10"	43	9.8'
FE3224	24'	12'	21'	23' 8"	51	11.6'
FE3228	28'	14'	25'	27' 7"	59	13.5'
FE3232	32'	16'	29'	31' 5"	71	15.3'
FE3236	36'	18'	32'	34' 4"	79	17.7'
FE3240	40'	20'	35'	37' 3"	93	20.3'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Does not include rope and pulley
- ▶ Product color may vary and are subject to change.

INSIDE WIDTH			OUTSIDE WIDTH		
BASE	FLY		BASE	FLY	
16-28' models	14 11/16"	13 11/16"	16-28' models	17 1/16"	16 1/16"
32-40' models	15 5/16"	14 5/16"	32' model	17 11/16"	16 11/16"

FE3108



SERIES  
**FE3100**  
FIBERGLASS  
SINGLE LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
8-14' models 16-20' models	3 1/4" 3 5/16"	8-14' models 16-20' models
	14 1/16" 15 5/16"	17 3/16" 17 11/16"



1. Mar-resistant rail end caps.



3. Swivel safety shoe with overmolded polymer tread.



2. D-shaped rungs.

4. Direct rung - rail connection.

MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3108	8'	11' 1"	16	4.3'
FE3110	10'	13'	21	5.4'
FE3112	12'	15'	25	6.4'
FE3116	16'	18' 10"	36	8.8

- \*Assumes 5' 7" person with 12" vertical reach
- \*Special order item
- Product color may vary and are subject to change.

\*D-shaped rungs

FE7220



SERIES  
**FE7200**  
FIBERGLASS EXTENSION  
LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
16-28' models 32' model 36-40' models	3 1/4" 3 5/16" 3 11/32"	base fly
	15" 13 1/16"	17 3/8" 16 1/16"

STACK HEIGHT
6 1/4"



1. Mar-resistant rail end caps.



4. MaxLock™ with QuickLatch™.



2. Outside slide guides.



5. Swivel safety shoe with overmolded polymer tread.



3. Aluminum rung connector plates.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7216*	16'	8'	13'	15' 11"	34	7.0'
FE7220	20'	10'	17'	19' 10"	45	8.7'
FE7224	24'	12'	21'	23' 8"	53	10.3'
FE7228	28'	14'	25'	27' 7"	62	12.0'
FE7232	32'	16'	29'	31' 5"	72	13.7'
FE7236	36'	18'	32'	34' 4"	110	15.4'
FE7240	40'	20'	35'	37' 3"	117	17.0'

- \*Assumes 5' 7" person with 12" vertical reach
- \*Does not include rope or pulley
- Product color may vary and are subject to change.

MAXLOCK™

\*D-shaped rungs

FE0620



SERIES  
**FE0600**  
FIBERGLASS EXTENSION  
LADDER

TYPE II  
**225** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH
3 1/4"

STACK HEIGHT
6 1/4"

INSIDE WIDTH
base fly
14 1/16" 13 1/16"

OUTSIDE WIDTH
base fly
17 1/16" 16 1/16"



1. Mar-resistant rail end caps.



4. MaxLock™ with QuickLatch™.



2. Outside slide guides.



5. Swivel safety shoe with overmolded polymer tread.



3. D-shaped rungs.



6. Direct rung - rail connection.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE0616*	16'	8'	13'	15' 11"	28	6.3'
FE0620	20'	10'	17'	19' 10"	39	8.0'
FE0624	24'	12'	21'	23' 8"	48	9.6'
FE0628**	28'	14'	25'	27' 7"	53	11.2'

- \*Assumes 5' 7" person with 12" vertical reach
- \*Does not include rope or pulley
- \*\*Special order item
- Product color may vary and are subject to change.

MAXLOCK™

\*D-shaped rungs

FE8908




▶ \*Round rungs

SERIES  
**FE8900**  
FIBERGLASS MANHOLE  
LADDER



1. Convenient 14 1/2" -width design.



2. High -vis rail protectors.



3. Round rungs.



4. Heavy duty slip-resistant shoes.

RAIL DEPTH	MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
3 1/4"	FE8908	8'	11' 1"	17.5	2.8'
INSIDE WIDTH	FE8910	10'	13'	21	3.5'
12 1/8"	FE8912	12'	15'	25	4.2'
OUTSIDE WIDTH	FE8914	14'	16' 11"	30	4.9'
14 1/2"	FE8916	16'	18' 10"	34	5.6'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

FH1007



SERIES  
**FH1000**  
FIBERGLASS SHELF  
LADDER



1. Rubber bumper.



2. Angled steps.



3. Serrated aluminum steps.



4. Double-rib step construction.




5. Heavy-duty gusset bracing.



6. Overmolded shoe with increased resistance of wear and tear.

MODEL	LADDER SIZE	MAX. REACH*	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FH1006	6'	9' 5"	15 3/16"	10	2.4'
FH1008	8'	11' 4"	15 3/16"	14	3'
FH1010	10'	13' 3"	15 3/16"	20	3.8'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ Product color may vary and are subject to change.

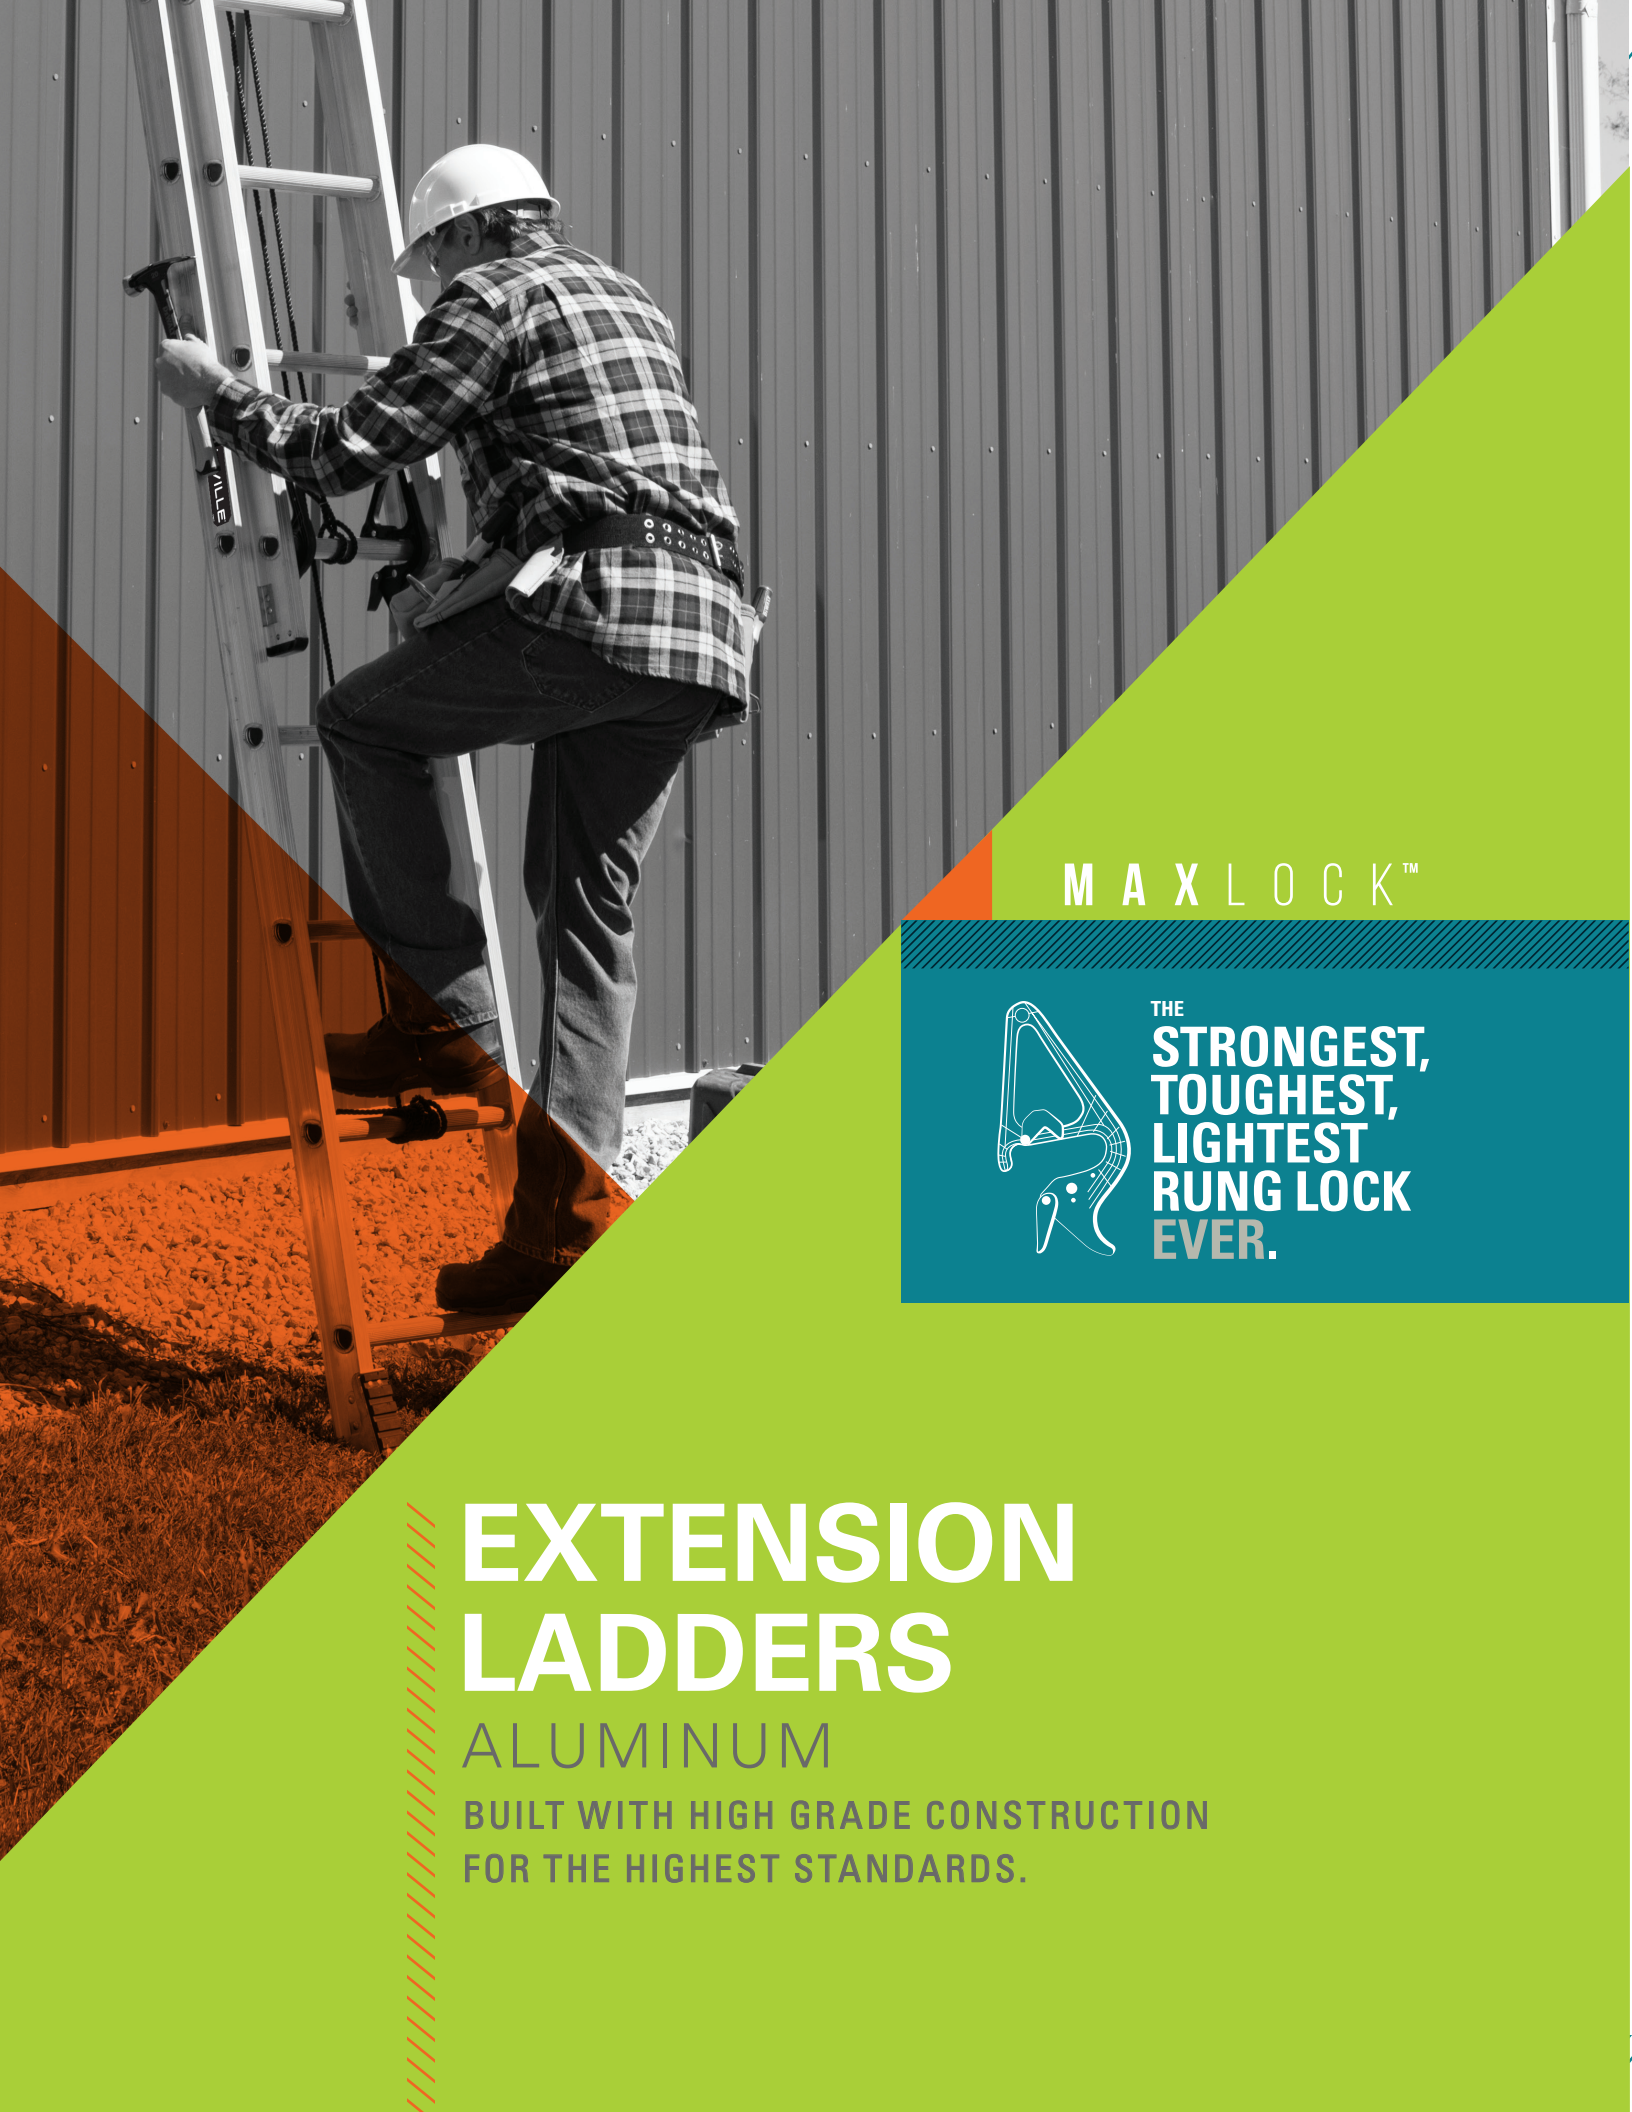

MAX LOCK™



THE  
**STRONGEST,  
TOUGHEST,  
LIGHTEST  
RUNG LOCK  
EVER.**

# EXTENSION LADDERS

ALUMINUM

BUILT WITH HIGH GRADE CONSTRUCTION  
FOR THE HIGHEST STANDARDS.

AE1220HD



SERIES  
**AE1200HD**  
ALUMINUM  
EXTENSION LADDER


TYPE IAA  
**375** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH		INSIDE WIDTH		BASE	FLY
16-40' models	3"	16-40' models	16 7/16"	16 7/16"	14 5/16"
44-48' models	4"	44-48' models	18"	18"	15 11/16"

STACK HEIGHT		OUTSIDE WIDTH		BASE	FLY
16-40' models	3 1/4"	16-40' models	19 1/16"	19 1/16"	16 15/16"
44-48' models	4 1/8"	44-48' models	20 5/8"	20 5/8"	18 5/16"

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Does not include rope or pulley
- ▶ \*\*\*300lbs. Type IA-rated standard ladder
- ▶ \*\*\*\*250 lbs. Type I-rated standard ladder



MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1216HD**	16'	8'	13'	15' 11"	38	7.8'
AE1220HD	20'	10'	17'	19' 10"	44	9.7'
AE1224HD	24'	12'	21'	23' 8"	52	11.5'
AE1228HD	28'	14'	25'	27' 7"	62	13.3'
AE1232HD	32'	16'	29'	31' 5"	71	15.2'

**MAXLOCK™**  
▶ \*D-shaped rungs


AE2110



SERIES  
**AE2100**  
ALUMINUM  
SINGLE LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
3"	15 9/16"	17 13/16"



MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2108	8'	11' 1"	15	4.8'
AE2110	10'	13'	18	6.0'
AE2112	12'	15'	22	7.1'
AE2114	14'	16' 11"	28	8.4'
AE2116	16'	18' 10"	30	9.5'
AE2118	18'	20' 9"	38	10.7'
AE2120	20'	22' 8"	42	11.8'

- ▶ \*Assumes 5' 7" person with 12" vertical reach

▶ \*D-shaped rungs

AE2200




SERIES  
**AE2200**  
ALUMINUM  
EXTENSION LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

RAIL DEPTH		INSIDE WIDTH		BASE	FLY
3"		16-24' models	15 9/16"	15 9/16"	13 1/16"
		28-40' models	18 3/8"	18 3/8"	35 1/4"

STACK HEIGHT		OUTSIDE WIDTH		BASE	FLY
5 1/4"		16-24' models	17 13/16"	17 13/16"	15 5/16"
		28-40' models	18"	18"	15 7/8"



MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2216*	16'	8'	13'	15' 11"	30	7.5'
AE2220	20'	10'	17'	19' 10"	37	9.3'
AE2224	24'	12'	21'	23' 8"	43	11.1'
AE2228	28'	14'	25'	27' 7"	56	13.1'
AE2232	32'	16'	29'	31' 5"	66	14.8'
AE2236	36'	18'	32'	34' 4"	76	16.7'
AE2240	40'	20'	35'	37' 3"	84	18.5'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\* Does not include rope or pulley

**MAXLOCK™**  
▶ \*D-shaped rungs

**AE3220**



SERIES  
**AE3200**  
ALUMINUM  
EXTENSION LADDER

TYPE I  
**250** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.
3. Modified I-beam.



3. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.

<b>RAIL DEPTH</b>	3"
<b>STACK HEIGHT</b>	5 1/4"
<b>INSIDEWIDTH</b>	
base	15 1/4"
fly	13 15/16"
<b>OUTSIDEWIDTH</b>	
base	17 1/2"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE3216**	16'	8'	13'	15' 11"	27	7.3'
AE3220	20'	10'	17'	19' 10"	32	9.0'
AE3224	24'	12'	21'	23' 8"	38	10.8'
AE3228	28'	14'	25'	27' 7"	53	12.5'
AE3232	32'	16'	29'	31' 5"	60	14.3'
AE3236	36'	18'	32'	34' 4"	72	17.8'
AE3240	40'	20'	35'	37' 3"	80	17.8'

▶ \*Assumes 5' 7" person with 12" vertical reach  
▶ \*\* Does not include rope or pulley

**MAXLOCK™**  
▶ \*D-shaped rungs

**AE4220PG**



SERIES  
**AE4200PG**  
ALUMINUM  
EXTENSION LADDER

TYPE II  
**225** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProGrip™**— Slip resistant tread protects work surface.
2. D-shaped rungs.
3. Modified I-beam.



4. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.

<b>RAIL DEPTH</b>	3"
<b>STACK HEIGHT</b>	5 1/4"
<b>INSIDEWIDTH</b>	
base	15 1/4"
fly	14 5/16"
<b>OUTSIDEWIDTH</b>	
base	17 1/8"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE4216PG**	16'	8'	13'	15' 11"	27	6.2'
AE4220PG	20'	10'	17'	19' 10"	32	8.8'
AE4224PG	24'	12'	21'	23' 8"	38	9.1'
AE4228PG	28'	14'	25'	27' 7"	48	10.5'
AE4232PG	32'	16'	29'	31' 5"	58	12'
AE4240PG	40'	20'	35'	37' 3"	80	14.9'

▶ \*Assumes 5' 7" person with 12" vertical reach  
▶ \*\* Does not include rope or pulley

**MAXLOCK™**  
▶ \*D-shaped rungs

**L-2321-16**



SERIES  
**L-2321**  
ALUMINUM  
EXTENSION LADDER

TYPE III  
**200** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Fixed runglock.
4. Slip-resistant feet.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2321-16*	16'	8'	13'	15' 11"	17.5	5.7'

▶ \*Assumes 5' 7" person with 12" vertical reach  
▶ \*\* Does not include rope or pulley

▶ \*D-shaped rungs

L-2324-16




**MAXLOCK™**  
► \*D-shaped rungs

SERIES  
**L-2324**  
ALUMINUM EXTENSION LADDER



1. Mar-resistant rail end caps.



2. D-shaped rungs.



3. MaxLock™ with QuickLatch™.



4. Slip-resistant rubber feet.

TYPE III  
**200** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2324-16**	16'	8'	13'	15' 11"	21	5.5'
L-2324-20	20'	10'	17'	19' 10"	26	7.0'
L-2324-24	24'	12'	21'	23' 8"	32	8.3'

► \*Assumes 5' 7" person with 12" vertical reach  
► \*\* Does not include rope or pulley

AE1660

**OUR LONGEST LADDER**



SERIES  
**AE1660**  
ALUMINUM 3-SECTION  
EXTENSION LADDER



1. Aluminum cast rail end caps.



2. Round rungs.



3. Double rope & pulley.



4. Full I-beam.



5. Swivel safety shoe with overmolded polymer tread.

TYPE I  
**250** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	MAX. REACH*	RAIL DEPTH	STACK HEIGHT	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1660	60'	48'	49' 10"	4"	8 1/4"	169	31.0'

► \*Assumes 5' 7" person with 12" vertical reach

SECTION	LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
base	22'	18"	21 1/2"
center	20'	15 5/16"	18 3/16"
fly	18'	12 5/8"	16 1/8"

► \*Round rungs



# SPECIALTY LADDERS

UNIQUE SOLUTIONS FOR CONQUERING ANY CHALLENGE.

FT1506

GREAT FOR  
UNEVEN SURFACES



SERIES  
**FT1500**  
FIBERGLASS TRIPOD LADDER

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™** – multiple tool slots and magnet for increased productivity.
2. Center Pull Spreader Brace.
3. Double-rivet step construction & Heavy Duty gusset.



4. **Raptor Boot™** – Protects fiberglass & has heavy duty bonded tread.
5. **SHOX™** Advanced impact absorption protects fiberglass rails against damage.
6. Wider step surface.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FT1504	4'	28"	32"	1' 10"	8' 6"	15	5.4'
FT1506	6'	35 1/2"	44"	3' 9"	10' 4"	21	10.1'
FT1508	8'	43"	56"	5' 7"	12' 3"	30	16.1'
FT1510	10'	50 1/2"	67"	7' 6"	14' 2"	44	25.7'
FT1512	12'	58"	79"	9' 4"	16' 1"	59	34.8'

▶ \*Assumes 5' 7" person with 12" vertical reach  
▶ Product color may vary and are subject to change.

L-2032-02

SERIES  
**L-2032**  
ALUMINUM SAWHORSE  
SCAFFOLD

TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy duty, slip resistant, large 10" standing surface.
2. Steel hinges & gap for easy carrying.
3. Heavy duty pinch-resistant spreader braces.



4. Heavy-duty gusset bracing.
5. Overmolded shoe with increased resistance to wear and tear.



MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2032-02	2'	32"	26"	1' 10"	8' 5"	14	5.3
L-2032-03	3'	33 3/8"	34"	2' 9"	9' 4"	21	8.0
L-2032-04	4'	34 3/4"	43"	3' 9"	10' 4"	25	11.1

▶ \*Assumes 5' 7" person with 12" vertical reach

AZ9907




SERIES  
**AZ9900-800010**  
ALUMINUM  
SINGLE WALL LADDER


TYPE IA  
**300** LBS.  
LOAD CAPACITY  
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Round rungs.



3. Combine multiple units for a custom size.



2. Full I-beam construction.



4. Designed to be affixed to a wall. Installation kits not included.

MODEL	LADDER SIZE	APPROX. WEIGHT (LBS)	APPROX. CUBES
AZ9907-800010	7'	10	2.7'
AZ9909-800010	9'	13	3.4'
AZ9910-800010	10'	15	3.8'
AZ9912-800010	12'	18	4.6'
AZ9914-800010	14'	14	5.4'
AZ9916-800010	16'	26	6.2'



# MULTIPURPOSE LADDERS

ONE LADDER MULTIPLE SOLUTIONS

L-2099-22



1. **EASY OPERATION** with lightweight aluminum design.



3. **EASY TRANSITION** between positions with the safety hinge



2. **LOCK IN** your size & position with ease



4. **ROCK SOLID FOOTING** stability in every position



TYPE IA  
**300** LBS. LOAD CAPACITY  
*INCLUDES WEIGHT OF USER PLUS MATERIALS*

SERIES  
**L-2099**  
ALUMINUM  
MULTIPURPOSE LADDER



## 6 POSITIONS



Scaffold sold separately.

MODEL	LADDER SIZE	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	FOLDED DIMENSIONS (H x W x D)**	STEP LADDER MAX. REACH*	EXTENSION MAX. REACH*	WALL MAX REACH	ADJUSTABLE				
									STEP LADDER	STAIRWAY	SCAFFOLDING	EXTENSION	WALL
L-2099-14	14'	21	24	4.4'	8" x 22" x 44"	9' 5"	14' 2"	9' 1"	3' - 5'	3' - 5'	3'	7' - 11'	4' - 5'
L-2099-18	18'	24	32	6.5'	8" x 26" x 56"	11' 4"	18'	11'	4' - 7'	4' - 7'	4'	9' - 15'	5' - 7'
L-2099-22	22'	28	41	9.1'	8" x 29" x 68"	13' 3"	22'	13'	5' - 9'	5' - 9'	5'	11' - 19'	6' - 9'

- ▶ \*Assumes 5' 7" person with 12" vertical reach
- ▶ \*\*Width is based on widest point (bottom)
- ▶ Product color may vary and are subject to change.



# SCAFFOLDS / PLANKS


WORKSITE SOLUTIONS THAT ELEVATE EFFICIENCY.

# P SERIES


## SCAFFOLD PLANKS AND STORAGE PLATFORMS



1. Ergonomic, easy-grip molded handles/rungs.





3. Slip-resistant decking.



2. Reinforcing web braces.



4. Optional modular handrail system.

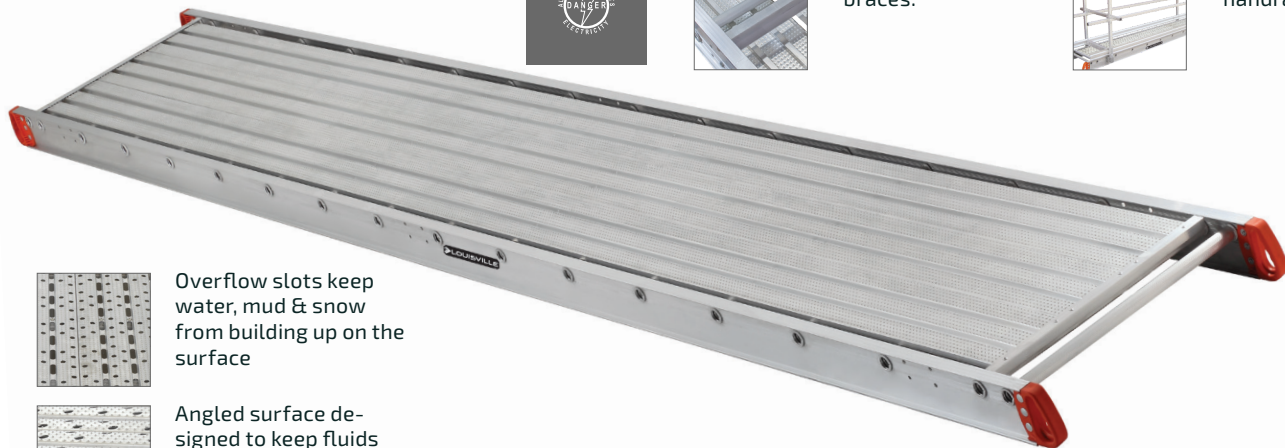


Overflow slots keep water, mud & snow from building up on the surface



Angled surface designed to keep fluids flowing out & away

### P1 SERIES


1-Person Decorator Plank 250LBS. LOAD CAPACITY



SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)
8'*	4"	P11208	26	P11408	29	P12008	62
12'	4"	P11212	38	-	-	-	-
16'	4"	P11216	50	P11416	53	P12016	62
20'	5"	P11220	76	P11420	65	P12020	88
24'	5"	P11224	88	P11424	90	P12024	100

### P2 SERIES


2-Person Scaffold Plank and Stage 500LBS. LOAD CAPACITY

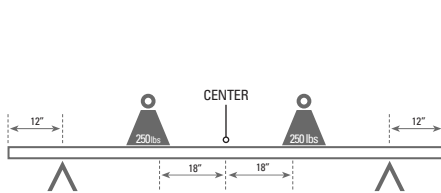

SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
5'	4"	-	-	-	-	-	-	-	-	P22805	26
6'	4"	P21206	16	-	-	-	-	-	-	P22806	35
8'	4"	-	-	-	-	-	-	-	-	P22808	41
10'	4"	-	-	-	-	-	-	-	-	P22810	50
12'	4"	P21212	41	P21412	34	P22012	52	P22412	57	P22812	60
14'	5"	-	-	-	-	-	-	-	-	P22814	76
16'	5"	P21216	47	P21416	65	P22016	69	P22416	81	P22816	85
20'	6"	P21220	97	P21420	103	P22020	115	P22420	124	P22820	129
24'	6"	P21224	112	P21424	118	P22024	133	P22424	142	P22824	151
28'	6"	P21228	142	P21428	149	P22028	166	P22428	176	P22828	185
30'	6"	-	-	-	-	-	-	-	-	P22830	200
32'	6"	P21232	160	P21432	167	P22032	181	P22432	198	P22832	213

### P3 SERIES

3-Person Stage Platform 750LBS. LOAD CAPACITY



SIZE	SIDE RAIL DEPTH	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
16'	6"	P32016	87	P32416	101	P32816	111
20'	6"	P32020	119	P32420	133	P32820	137
24'	6"	P32024	135	P32424	150	P32824	163
28'	7"	P32028	217	P32428	225	P32828	239
32'	7"	-	-	P32432	252	P32832	273

# MODULAR GUARDRAIL SYSTEMS

## FOR PLANKS AND STAGES

ANSI  
AMERICAN NATIONAL STANDARD  
 ANSI A10.8

OSHA  
REGULATIONS



- ▶ \*Double all quantities, except for web brace assembly, for 2-Sided Systems
- ▶ \*\*Required on planks with side rails of less than 6"-height
- ▶ \*\*\*MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

### SINGLE-SIDED SYSTEM\*

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01
5'	2	2	0	1	0	2**
6'	2	2	0	1	0	2**
8'	2	2	0	1	0	2**
10'	2	0	2	0	1	2**
12'	3	0	2	0	1	3**
14'	3	0	2	0	1	3**
16'	3	4	0	2	0	3**
18'	3	0	4	0	2	3**
20'	4	6	0	3	0	4**
24'	4	6	0	3	0	4**
28'	5	4	2	2	1	0**
30'	5	8	0	4	0	0**
32'	5	4	4	2	2	0**
36'	6	10	0	5	0	0**
40'	6	6	4	3	2	0**

### 3-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02*
5'	4	2	0	1	0	2**	2
6'	4	2	0	1	0	2**	2
8'	4	2	0	1	0	2**	2
10'	4	0	2	0	1	2**	2
12'	5	0	2	0	1	3**	2
14'	5	0	2	0	1	3**	2
16'	5	4	0	2	0	3**	2
18'	5	0	4	0	2	3**	2
20'	6	6	0	3	0	4**	2
24'	6	6	0	3	0	4**	2
28'	7	4	2	2	1	0**	2
30'	7	8	0	4	0	0**	2
32'	7	4	4	2	2	0**	2
36'	8	10	0	5	0	0**	2
40'	8	6	4	3	2	0**	2

### RAIL END CAPS

RAIL SIZE	MODEL	APPROX. WEIGHT (LBS)
Caps for 4" Rail	PK740A	0.65 Ea.
Caps for 5" Rail	PK740B	0.80 Ea.
Caps for 6" Rail	PK740C	1.07 Ea.
(2 end caps and hardware per kit)		
Caps for 7" Rail	P064226	0.8 Ea.

### PRODUCT WEIGHTS

ITEM	APPROX. WEIGHT (LBS)
MPT-01	0.56
MGR-09	2.31
MGR-13	3.33
MTB-09	2.38
MTB-13	3.44
MRF-01	1.13
MER-01	2.00
MER-02	2.84

### PT SERIES GUARDRAIL

HANDRAIL SOCKET WITH HARDWARE	MODEL	APPROX. WEIGHT (LBS)
3" Handrail socket w/ hardware	PR098004C	1

- ▶ \*\*\*MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

### 4-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02***
5'	4	4	0	2	0	2**	2
6'	4	4	0	2	0	2**	2
8'	4	4	0	2	0	2**	2
10'	4	0	4	0	2	2**	2
12'	6	0	4	0	2	3**	2
14'	6	0	4	0	2	3**	2
16'	6	8	0	4	0	3**	2
18'	6	0	8	0	4	3**	2
20'	8	12	0	6	0	4**	2
24'	8	12	0	6	0	4**	2
28'	10	8	4	4	2	0**	2
30'	10	16	0	8	0	0**	2
32'	10	8	8	4	4	0**	2
36'	12	20	0	10	0	0**	2
40'	12	12	8	6	4	0**	2



## LP-2921 SERIES

## MEDIUM-DUTY TELESCOPING PLANK

This medium-duty telescoping plank is available in 9', 13', and 16' sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

MODEL	PLANK LENGTH	PLANK WIDTH	STANDARD EXTENSION	APPROX. WEIGHT (LBS)
LP-2921-09A	9'	12"	6' - 9'	30
LP-2921-13A	13'	12"	8' - 13'	39
LP-2921-16A	16'	12"	10' - 16'	50

## PD8000 AND PD9200 SERIES

## SCAF-A-DECK

## PD9207



ANSI

American National Standards Institute

ANSI A10.8

OSHA

Occupational Safety and Health Administration

MEDIUM-DUTY

ELECTRICITY

## PD9200 SERIES



1. Safety latch.



2. Solid bolt construction.

MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	CAPACITY (LBS/FT <sup>2</sup> )	APPROX. WEIGHT (LBS)
PD9207	7'	19 1/8"	2"	75	31
PD9208	8'	19 1/8"	2"	75	35
PD9210	10'	19 1/8"	2"	50	45



## SRA10 SERIES

## LADDER RACKS

Louisville Ladder's SRA10 ladder rack merchandisers are designed specifically to increase ladder sales. Holds up to six ladders. Easy to assemble. Ladders & accessories not included.

MODEL	LADDER CAPACITY	FOOTPRINT	APPROX. WEIGHT (LBS)
SRA10-06	6	26" x 46"	40



SYSTEM FOR FIBERGLASS LADDERS

## FORGET THE STENCIL, KEEP YOUR LADDER IDENTIFIED & PROMOTE YOUR CUSTOMER'S BRAND WITH LOGOLOCK™ SYSTEM

LogoLock™ embeds a long-lasting image into the fiberglass rail of your ladders.



### WHY USE LOGOLOCK™?

- Increase awareness and scope of your brand
- Refresh your company's image
- Deter theft by displaying your company's logo

### HOW TO ORDER LOGOLOCK™?

- Incremental fee for each logo (added to the price of each ladder)
- Each ladder will have one custom logo applied to each side rail
- Logo dimensions should be a maximum of 7 1/16" x 2 3/8"
- Minimum order of six fiberglass ladders (any model)
- Artwork must be provided in vector format or in ".tif" or ".jpg" format at a MINIMUM of 300 dpi (dots per inch) resolution. Submit detailed instructions for logo display including color, placement, size and other customization
- After we review your images, we'll provide a customized part number and distributor pricing
- Lead time is from 5 to 10 business days

# C.L.I.M.B. ACADEMY



## SAFETY TRAINING PROGRAM


Louisville Ladder's C.L.I.M.B. ACADEMY teaches fundamental principles of using stepladders, extension ladders, rolling warehouse ladders, rolling tower scaffolding, and aluminum walkboards. In addition to C.L.I.M.B. ACADEMY, our customers benefit from free ladder condition assessments and ladder use audits. Several of our customers have saved thousands of dollars by avoiding OSHA fines and ladder-related accidents.

**CHOOSE** the right equipment  
**LOOK** for damaged or missing parts  
**IMPLEMENT** a safe setup routine  
**MOVE** safely using three points of contact  
**BE** a climbing safety expert; NOT a statistic!

REDUCE THE RISK OF  
**ACCIDENTS & FINES**  
AT THE WORK SITE

Visit our website to learn more at [www.louisvilleladder.com](http://www.louisvilleladder.com)

# WAREHOUSE LOCATIONS

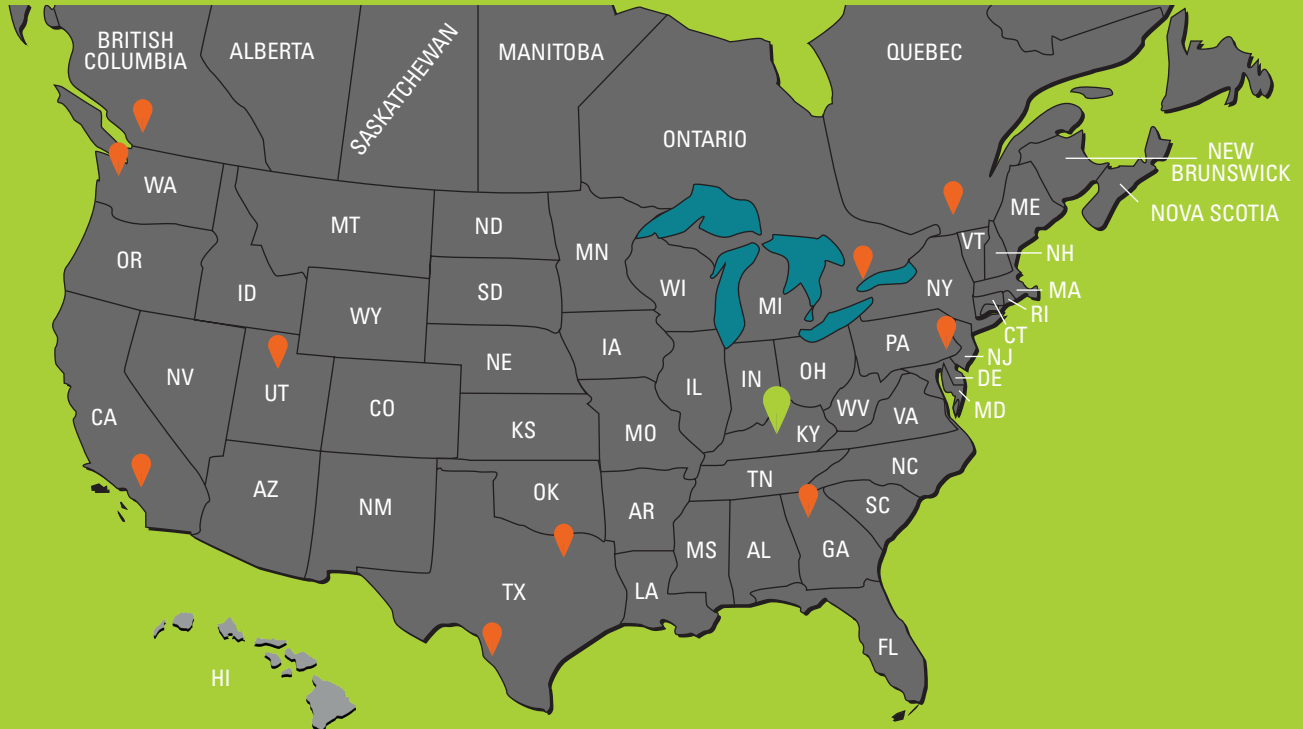

## REGIONAL WAREHOUSES

### BENSALEM, PA

855 Dunks Ferry Road  
Bensalem, PA 19020  
PHONE: (215) 638-8904

### GRAND PRAIRIE, TX

801 Heinz Way  
Grand Prairie, TX 75051  
PHONE: (972) 602-4400

### LAREDO, TX

11402 Eastpoint Dr.  
Laredo, Tx, 78045  
PHONE: (956) 462-0949

### LOUISVILLE, KY

7765 National Turnpike, Unit 190  
Louisville, KY, 40214  
PHONE: (502) 636-2811

### ONTARIO, CA

2050 S. Baker Ave.  
Ontario, CA 91761  
PHONE: (909) 941-0623

### SALT LAKE CITY, UT

760 West Layton Ave.  
Salt Lake City, UT 84104  
PHONE: (801) 854-8949

### SEATTLE, WA

920 S. Doris Street  
Seattle, WA 98108  
PHONE: (206) 762-4888  
FAX: (206) 767-4386

### TUCKER, GA

2689A Mountain Industrial Blvd.  
Tucker, GA 30084  
PHONE: (770) 491-1515

## CANADA

### QUEBEC

2001 Francis Hughes  
Laval, QC H7S 2G2  
PHONE: (450) 668-4610  
FAX: (450) 668-4611

### ONTARIO - HEAD OFFICE & WAREHOUSE

100 Engelhard Drive  
Aurora, ON L4G 3V2  
PHONE: (800) 867-5233  
USA: (888) 252-3337  
FAX: (905) 727-7271

### BRITISH COLUMBIA

17260 Heather Drive Unit 202  
Surrey, BC V3S 0B4  
PHONE: (604) 940-2972  
FAX: (604) 940-2973



### GLOBAL HEADQUARTERS AND WAREHOUSE

7765 National Turnpike, Unit 190  
Louisville, KY 40214

www.louisvilleadder.com

PHONE (USA & CAN) 1.800.666.2811  
PHONE 1.502.636.2811  
FAX 1.800.274.4566  
EMAIL [marketing@louisvilleadder.com](mailto:marketing@louisvilleadder.com)

**CONNECT**  
WITH LOUISVILLE LADDER AT



## TERMS AND CONDITIONS

SCAN TO VIEW



Subject to our  
Terms & Conditions

# **LOUISVILLE**

**BUILT** TO  
BE  
**ABOVE**

7765 National Turnpike, Unit 190  
Louisville, KY 40214

[www.louisvilleladder.com](http://www.louisvilleladder.com)

PHONE  
(USA AND CAN) 1.800.666.2811  
PHONE 1.502.636.2811  
FAX 1.800.274.4566  
EMAIL [marketing@louisvilleladder.com](mailto:marketing@louisvilleladder.com)

