

»» LOUISVILLE



PRODUCT
CATALOG

BUILT TO
BE
ABOVE



SINCE 1946

LOUISVILLE LADDER IS
BUILT TO BE
ABOVE

Innovation is at the heart of everything we do. At Louisville Ladder, it drives the design, engineering, and craftsmanship behind every product we create—setting the bar for quality, durability, and performance across the industry. From our smallest accessories to our most advanced ladder systems, each product is built with purpose and precision to support your goals—whether that's improving safety, increasing efficiency, or protecting your bottom line. Because at Louisville Ladder, we don't just build climbing solutions—we build with you in mind. Your worksite. Your success. Your future. That's how we've earned our place as the most trusted name at the top.

7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvillessladder.com

PHONE
(USA AND CAN) 1.800.666.2811
PHONE 1.502.636.2811
FAX 1.800.274.4566
EMAIL marketing@louisvillessladder.com



A REPUTATION IN RELIABILITY

For more than 80 years, Louisville Ladder has been known as the company to trust for all of your ladder and climbing equipment needs. Our long-standing track record of designing hard-working, easy-to-use ladders is what sets us apart, and our commitment to building reliable products is just as important to us now as it was on day one. That's why when you buy a Louisville Ladder, you can feel confident knowing that you are buying the best.

ADVANCING THE INDUSTRY

As job sites evolve, so do the demands placed on ladders, and on the people who use them. That's why we continue to innovate across our processes, product design, and materials, using both voice-of-customer insights and our deep expertise in ladder engineering to deliver an exceptional user experience.

Our commitment to advancing the industry means focusing on meaningful enhancements that maintain safety while improving ladder utility and promoting efficiency in everyday work. From high-visibility contact points that make standing surfaces easy to identify, to ergonomic step designs that promote comfort and confidence, every detail is thoughtfully considered. We also continually evaluate materials and construction methods to ensure our products perform reliably in real-world conditions.

By building on proven designs and elevating them through purposeful innovation, we remain a leader in ladder design, helping move the industry forward, one smart improvement at a time.

WE COLLABORATE

Our customers are our most important asset, and we pride ourselves on building genuine relationships with them from the get-go. Our teamwork-based approach allows us to treat each and every customer as an important partner, regardless of size, and our knowledgeable team of experts is always available to help. We realize that each customer is unique, as are their needs, and we treat them accordingly with customized solutions. It's a simple concept that we have never veered from, and one that keeps our customers returning time and time again.

INTEGRITY ABOVE ALL

When you've stood the test of time in an industry like ours, a strong foundation and unwavering values aren't optional, they're essential. At Louisville Ladder, we're proud of our decades of proven performance and unmatched expertise. But what truly sets us apart is our commitment to doing things the right way, guided by honesty, integrity, and authenticity at every step. From embracing sustainable practices, we stay grounded in the principles that matter most. Because while our products help you reach new heights, it's our values that keep us grounded.

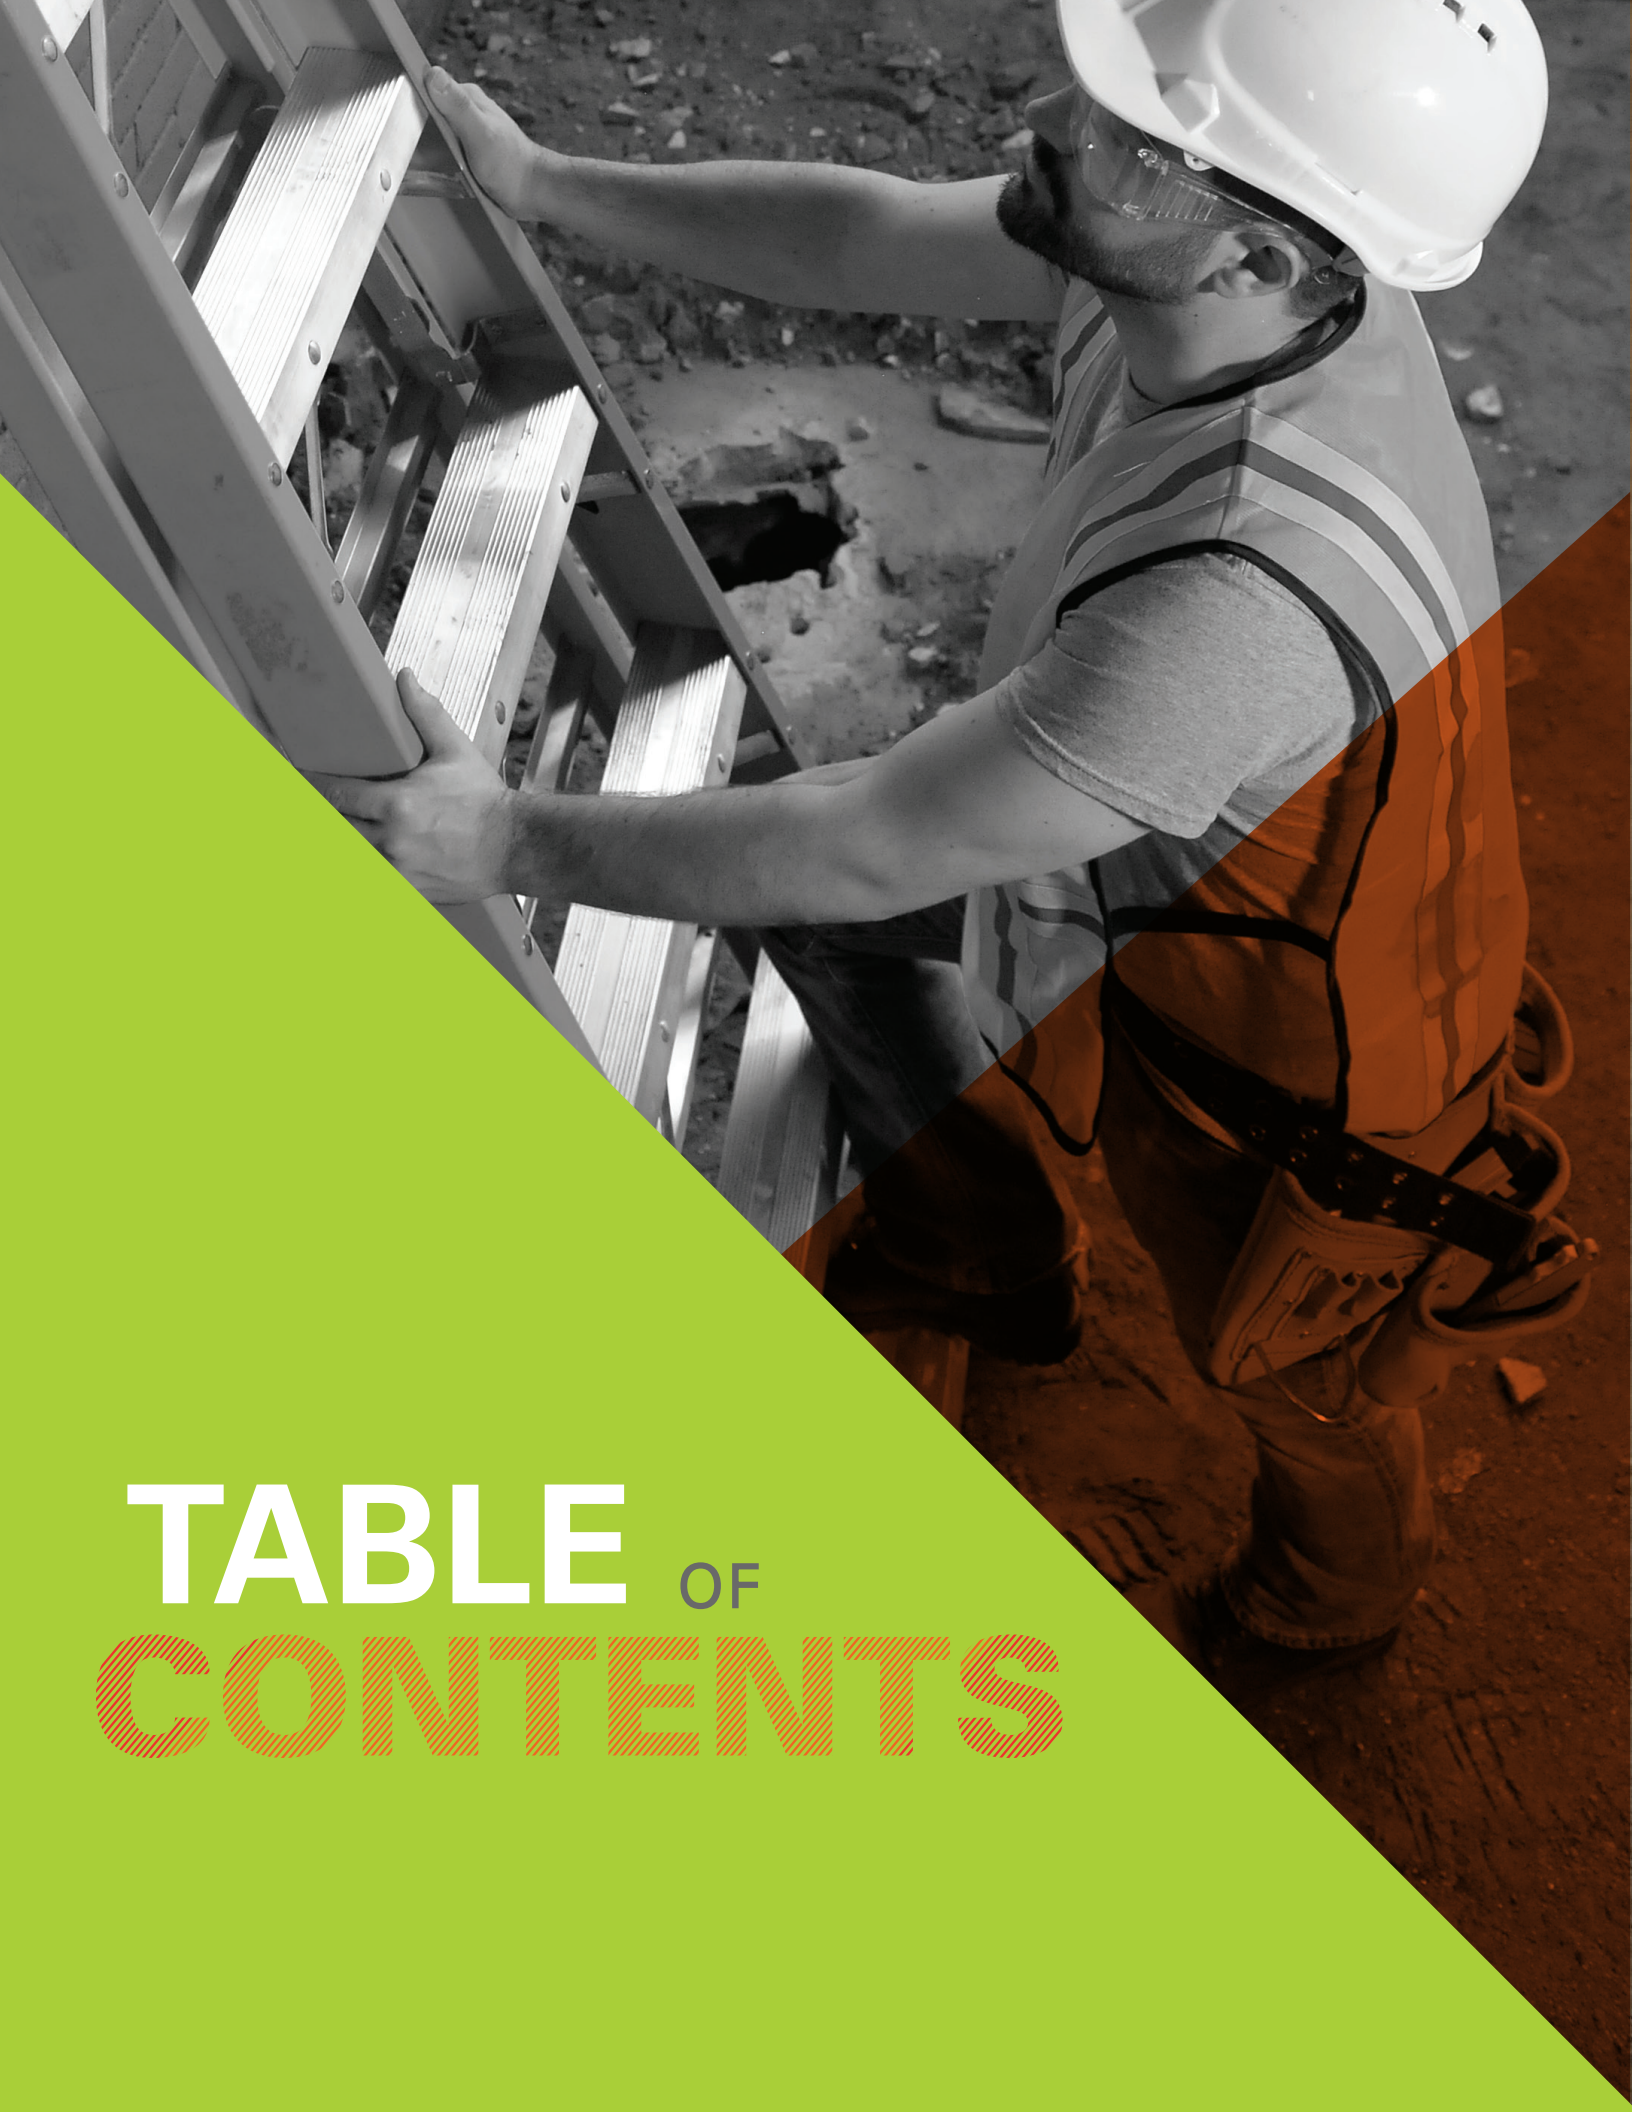


TABLE OF CONTENTS

Ladder Selection Guide.....	6
Ladder Safety Standards	7
Product Feature Glossary	8
Product Accessories	10

STEPLADDERS | FIBERGLASS

FS1400HD STEP.....	375lbs	13
FS1500 STEP.....	300lbs	13
L-3016 STEP.....	300lbs	14
FS2000 STEP.....	250lbs	14
FS4000 STEP.....	225lbs	14
FS1300HD STEP.....	375lbs	15
FM1400HD TWIN FRONT.....	375lbs	15
FM1500 TWIN FRONT.....	300lbs	15

PINNACLE

FXP1800HD PRO PLATFORM.....	375lbs	17
FXP1700 PRO PLATFORM.....	300lbs	17

2 IN 1 LEANING LADDERS

FCP1400HD CROSS PINNACLE.....	375lbs	19
FXS1400HD CROSS STEP.....	375lbs	20
FXS1500 CROSS STEP.....	300lbs	20
FGS1500 CROSS STEP GO.....	300lbs	21

STEPLADDERS | ALUMINUM

AS3000 STEP.....	300lbs	23
AS2100 STEP.....	250lbs	23
AS4000 STEP.....	225lbs	24
AP5000 MOBILE PLATFORM.....	300lbs	24

STEP STOOLS

FY8000 FIBERGLASS INDUSTRIAL STEP STAND.....	375lbs	26
L-3042 FIBERGLASS MINI WORKING PLATFORM....	300lbs	26
AY8000 ALUMINUM INDUSTRIAL STEP STAND.....	375lbs	26
L-2011 ALUMINUM STOCKING STOOL	300lbs	26
L-4461 STEEL STEP STOOL	375lbs	27

EXTENSION LADDERS | FIBERGLASS

FE4200HD EXTENSION.....	375lbs	29
L-3022-PT EXTENSION.....	300lbs	29
FE3200 EXTENSION.....	300lbs	29
FE3100 SINGLE.....	300lbs	30
FE7200 EXTENSION.....	300lbs	30
FE0600 EXTENSION.....	225lbs	30

FE8900 MANHOLE.....	375lbs	31
---------------------	--------	----

FH1000 SHELF.....	300lbs	31
-------------------	--------	----

EXTENSION LADDERS | ALUMINUM

AE1200HD EXTENSION.....	375lbs	33
AE2100 SINGLE.....	300lbs	33
AE2200 EXTENSION.....	300lbs	33
AE3200PG EXTENSION.....	250lbs	34
AE4200PG EXTENSION.....	225lbs	34
L-2321 EXTENSION.....	200lbs	34
L-2324 EXTENSION.....	200lbs	35
AE1600 3-SECTION EXTENSION.....	250lbs	35

SPECIALTY LADDERS

FT1500 FIBERGLASS TRIPOD.....	300lbs	37
L-2032 ALUMINUM SAWHORSE.....	300lbs	37
AZ9900 SINGLE LADDER.....	300lbs	37

MULTIPURPOSE LADDERS

L-2099 ALUMINUM MULTIPURPOSE.....	300lbs	39
-----------------------------------	--------	----

WAREHOUSE/LADDERS/SCAFFOLDS/PLANKS

P SERIES SCAFFOLD PLANKS & STAGE PLATFORMS.....	41
MODULAR GUARDRAIL SYSTEMS.....	42
LP-2921 SERIES TELESCOPING PLANK	43
PD9200 SCAF-A-DECK	43
LADDER RACKS SRA10	43

C.L.I.M.B. Academy	44
LOGOLOCK SYSTEM.....	44
WAREHOUSE LOCATIONS	45
SOCIAL MEDIA.....	45
TERMS & CONDITIONS	45

HOW TO SELECT A LADDER

A GUIDE

1. SELECT A TYPE



STEPLADDER

Most popular ladder type, sized 4'-20', with built-in tool storage.



TWIN FRONT LADDER

Allows two users to work on the same ladder simultaneously.



PLATFORM LADDER

Designed to reduce fatigue and increase comfort with the slip resistant platform.




LEANING LADDERS

A stepladder that turns into a leaning ladder getting you closer to your work.



EXTENSION LADDER

Leans against a firm support. Available in 16'-40', ideal for higher elevations.



MULTIPURPOSE

1 ladder - 6 positions. Allowing you to work any way the job site demands.

2. SELECT A LADDER MATERIAL



DO NOT USE ALUMINUM LADDERS NEAR ELECTRICITY

ALUMINUM

- Lightweight
- Long-lasting construction
- Resists corrosion
- Ideal for painting, roofing, and siding



FIBERGLASS LADDERS ARE SAFE FOR WORKING AROUND ELECTRICITY

FIBERGLASS

- Non-conductive when clean and dry
- Strong and durable
- Weather-resistant
- Great for heavy-duty construction

3. SELECT A LOAD CAPACITY

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE IAA: Professional use. Extra heavy duty. Capable of supporting 375 lbs.
USES: MRO and industrial construction.

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE IA: Professional use. Extra heavy duty. Capable of supporting 300 lbs.
USES: Roofing, building maintenance, contracting and industrial construction.

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE I: Industrial use. Heavy duty. Capable of supporting 250 lbs.
USES: Building maintenance, general contracting and sheet rock.

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE II: Commercial use. Medium duty. Capable of supporting 225 lbs.
USES: Light commercial and general repair, painting and cleaning.

TYPE III
200 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE III: Household use. Light duty. Capable of supporting 200 lbs.
USES: Light cleaning and painting.

4. SELECT A HEIGHT

STEPLADDERS

LADDER SIZE	APPROX. HIGHEST STANDING LEVEL	MAXIMUM REACH ^A
4'	1' 11"	8' 6"
5'	2' 10"	9' 5"
6'	3' 9"	10' 4"
7'	4' 9"	11' 4"
8'	5' 8"	12' 3"
10'	7' 7"	14' 2"
12'	9' 6"	16' 1"
14'	11' 5"	18'
16'	13' 4"	19' 11"
18'	15' 3"	21' 10"
20'	17' 2"	23' 8"

EXTENSION LADDERS

LADDER SIZE	MAXIMUM EXTENDED LENGTH	MAX. REACH ^A	WORKING RANGE TOTOP SUPPORT [*]	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE [*]
16'	13'	15' 11"	7 ½' - 12 ½'	4 ½' - 9 ½'
20'	17'	19' 10"	9 ½' - 16 ½'	6 ½' - 13 ½'
24'	21'	23' 8"	11 ½' - 20'	8 ½' - 17'
28'	25'	27' 7"	13 ½' - 24'	10 ½' - 21'
32'	29'	31' 5"	15 ½' - 28'	12 ½' - 25'
36'	32'	34' 4"	17 ½' - 31'	14' - 28'
40'	35'	37' 3"	19' - 33 ½'	16' - 30 ½'
44'	39'	41' 1"	21' - 37 ½'	18' - 34 ½'
48'	43'	45'	23' - 41 ½'	20' - 38 ½'
60'	48'	49' 10"	23' - 46 ½'	20' - 43 ½'

- ^AAssumes 5' 7" person with 12" vertical reach
► ^{*}When set up at the proper 75 1/2° angle

SCAN TO LEARN MORE:

This guide is a starting point only. For complete ladder safety guidance, visit our free CLIMB Academy training.



HOW TO SAFELY USE OUR LADDERS

ANSI

Meets or exceeds requirements
of American National Standards Institute

Louisville Ladder, Inc. manufactures products in compliance with the applicable safety standards of the American National Standards Institute (ANSI). There are a variety of ANSI safety standards depending on material and type of ladder. You can find a list of them in the figure below. In addition, ANSI standards have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load. See section "Select Load Capacity" on page 6 for more information on ANSI Duty Ratings.

ROLLING SCAFFOLDS	ANSI A10.8
PLANKS & STAGES:	ANSI A10.8
WOOD LADDERS:	ANSI A14.1
STEP STOOLS:	ANSI A14.11
METAL LADDERS:	ANSI A14.2
FIBERGLASS LADDERS:	ANSI A14.5
MOBILE LADDER STANDS & PLATFORM LADDERS:	ANSI A14.7
LADDER ACCESSORIES:	ANSI A14.8
ATTIC LADDERS:	ANSI A14.9



The OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION (OSHA) regulates the adequacy of ladders and the work practices followed by employees using them in two sections: Portable ladders used in General industry (1910.23) and portable ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace, and the safe use of ladders on the job. OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore, users should check with their own state OSHA representatives.



Where applicable, product meets or exceeds CANADIAN STANDARDS INSTITUTE testing requirements.

CAS: Z11



DANGER: Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

SAFETY IS EVERYONE'S RESPONSIBILITY. Even a rigidly constructed ladder can be involved in an accident if the proper precautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.

PROPER SELECTION

- Refer to product labels for Highest Standing Level and Working Load Capacity information.
- Select the ladder size to reach your work without climbing above the Highest Standing Level or overreaching.
- Weight of user, tools and materials shall not exceed Working Load Capacity. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs.
- Use a fiberglass or wood ladder if working with or around electricity.

INSPECTION BEFORE EACH USE

- Inspect before use. Do not use ladders with missing, loose, damaged, or non-operating parts.
- Make sure locks are in good working order.
- Replace heavily worn feet and illegible labels.
- Contact manufacturer for parts.
- Keep ladder and hinges clean and free of slippery substances.

CONSIDER BEFORE EACH USE

- Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. trestle ladders). Do not overload.
- Do not use ladders if you are in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped.
- Use help in setting up ladder, if possible.
- Ladders are not to be set up on scaffolds.
- Metal ladders conduct electricity. Keep away from wires and electrical circuits.
- Consult manufacturer for use in chemical or other corrosive environments.
- Do not use ladders in high winds or during a storm.
- Secure ladder from excessive movement (e.g. tie off, block, brace, etc.)
- Pay close attention to what you are doing.

STEP LADDERS – Proper Set-up and Use

- Fully open ladder and lock spreader braces.

- Set all four feet on a firm level surface. Do not place on unstable, loose or slippery surfaces.
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Maintain a firm grip. Use both hands in climbing.
- Climb only front side of ladder. Face ladder when climbing and working.
- Do not step on the top step or top cap.
- Do not straddle front and back. Do not climb from the step ladder onto another ladder or surface.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

SINGLE & EXTENSION LADDERS – Proper Setup and Use

- Retract ladder sections fully before lifting or moving.
- Raise and lower ladder from ground only; never from the top.
- Set ladder feet on firm, level surface and both rails against a firm support at the top.
- Make sure ladder does not lean to side. Ladder leveling devices are available for use on uneven ground.
- Do not place on unstable, loose, or slippery surfaces without securing from movement (e.g. tie off, block, brace, etc.)
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Extend fly section and secure runglocks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- Do not overextend. A minimum overlap of sections is required as follows:
 - ladder size up to and including 32'-3" overlap
 - over 32' up to and including 36'-4" overlap
 - over 36' up to and including 48'-5" overlap
 - sizes over 48'-6" overlap
- Ladder must make a 75 1/2° angle with the ground. Obtain this angle as follows:
 - Place toes against bottom of ladder side rails
 - Stand erect

- Adjust angle so you can grasp lowest ladder section with palms on the outside of the rails, arms extended straight at shoulder level
- To confirm if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- Recommend tying bottom fly rung to adjacent base rung, or engaging Quickclatch™, when available.
- Face ladder when climbing and working.
- Maintain a firm grip. Use both hands in climbing.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

PROPER CARE AND STORAGE

- Hang ladder on racks at intervals of 6' for support
- Never store materials on ladder
- Never drop or apply an impact load to ladder
- Securely support ladder in transit
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.
- For additional information see applicable ANSI Safety standards; A14.1–Wood; A14.2–Aluminum; A14.5–Fiberglass.

STEPLADDERS

PRODUCT FEATURES



Raptor Boot™

Polypropylene copolymer upper boot protects the rails of your fiberglass ladder. Thick, non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot to create a secure, slip-resistant footing. Inside, RaptorBoot™ has a unique open design that allows for quick and easy visual inspection of the ladder's rail.



Raptor Top™

Raptor Top™ is a versatile and durable ladder top designed to increase your productivity. It is multifunctional and includes a hardware tray, magnet tray, drill and tool slots, paint bucket holder, and pipe or 2x4-holder. The curved, ergonomic front surface of the Raptor Top™ gives you more leg room for maximum comfort. New heat transfer top with load rating.



RaptorGoTop™

Built-in rubber bumpers protect walls when using the ladder in the leaning position while 25 integrated tool holders keep tools organized, accessible, and your hands free when climbing.



"V" SHAPED ProTop™

The "V" shaped ProTop™ allows you to lean the ladder into corners, walls and poles. The integrated bumper protects the work surfaces and the top provides a place to put all the tools to get the job done.



SHOX™

SHOX™ is a side rail impact absorption system that reduces damage to the lowest, first step of your ladder. This helps prolong the life of the ladder.

Pair SHOX™ with our RaptorBoot™ rail protection feature for total security and defense against wear and tear from normal use.



Molded Pail Shelf

Our optional Molded Pail Shelf features a variety of tool slots, a drill slot, and can securely hold a paint tray or any size paint bucket.



Double-Rivet Step Construction

Each step is secured with six semi-tubular, large-headed rivets for maximum strength. This feature gives your ladder 30% greater shear strength than solid aluminum rivets.



Center-Pull Spreader Brace

Unique Center-Pull Spreader Brace designed for one-hand operation. Brace is steel-plated for extra durability.



Full Metal Boot™

Extra-heavy-duty cast-aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.




Pinch-Resistant Spreader Braces

A version of our heavy-duty spreader braces with plated steel and a double-rivet hinge to protect users from pinched fingers.



Heavy-Duty Gusset Bracing

All our gussets are created with heavy-duty steel. The gussets are added to angle back braces and steps for extra support.



Slip-Resistant Rubber Feet

The new overmolding process tightly bonds the polymer tread and aluminum of the shoe, increasing durability and resistance of the bottom tread against wear and tear.



Inside Spreader Braces

Spreader braces are mounted inside the fiberglass rails of your ladder to help protect braces from getting hooked or damaged in transit.



Wide Back Braces

Horizontal U-shaped back braces provide maximum stability and discourage unsafe climbing. The bottom back brace provides heavy-duty strength to the ladder base.

EXTENSION LADDERS

PRODUCT FEATURES

**MaxLock™ with QUICKLATCH®**

The MaxLock™, exclusively from Louisville Ladder, is custom designed for injection molding from a patented, advanced engineered polymer. Maxlock™ is the strongest, toughest, lightest rung lock ever made and won't bend or twist like others in the market and it reduces rung wear during fly extension and retraction. No other rung lock can match the Maxlock™ performance. The QuickLatch™, Engaged as instructed, allows users to latch the base and fly sections together for transport and in extended positions, so you don't have inadvertent sliding of the sections.

**ProGrip™**

Get a grip on your task! ProGrip's™ slip-resistant pad is integrated onto your ladder caps. This protects your support surface from damage. ProGrip™ includes easy-carry hand grips for your convenience.

**Rung-to-Rail Direct Connection**

The ladder's rung passes through a punched hole in the rail, and is hydraulically crimped on both sides to form a tight, twist-resistant connection. The rung is permanently connected to and supported by the rail, giving your extension ladder rigidity and stability.

**Aluminum Plate Connection Rungs**

Tempered aluminum rungs are hydraulically double-crimped to an aluminum plate. Each plate is fastened to the ladder's rails with four aluminum rivets.

**Mar-Resistant Rail End Caps**


All of our rail ends (on applicable products) feature impact-resistant caps that prevent work surfaces from marring and give you the protection and durability needed for longevity.

**Solid-Aluminum Rail End Caps**

Our rail ends (on 1200HD Series, and AE1660) feature extra-heavy-duty cast-aluminum caps to give your ladder the protection and durability needed for longevity.

**Modified I-Beam**

Side rails are full 3" extrusions shaped into a modified I-beam for lightweight strength. Interlocking rails keep fly and base sections from separating.

**D-Shaped Rungs**

The flat top, D-shaped rung provides a greater standing area than round rungs. They are fully serrated to give you a slip-resistant standing surface.

**Outside Slide Guides**

Two extra-heavy-duty outside slide guides are secured to the top of your extension ladder's base section with four rivets per guide.

**Double Rope & Pulley**


All aluminum double pulley systems come with a rot-resistant manila rope for excellent performance in any conditions.

**Round Rungs**

Round, tempered aluminum rungs are fully serrated for a slip-resistant surface. Each rung end is hydraulically double-crimped to your ladder's side rail.

**Full I-Beam**

Side rails are extra-heavy-duty 3" I-beam extrusions for maximum strength.

**Swivel Safety Shoes**

Heavy-duty overmolding process tightly bonds shoe with polymer tread material, which reduces wear and tear from every day use while increasing the footprint. The shoe can be used with the tread down or in a spiked position.

**Full Metal Boot™**

Extra-heavy-duty cast aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.

EXTENSION LADDERS

ACCESSORIES



Combination Pole Grip & Cable Hook

FIBERGLASS ONLY. A rigid steel-plated V-shaped pole grip covered with rubber tread, combined with cable hook assembly.

FACTORY	FIELD	PK-E03A (16'-28')	APPROX. WEIGHT
E03		PK-E03B (32'-40')	3 LBS
		*PK-E03C (16'-40')	3 LBS
		PK-E03D (16'-28')	2.7 LBS
			3 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.

*PK-E03C: L-3421-XX and L-3025-XX

Manufactured before 9-2019

*FE7200 & FE4200HD series, ladder size does not apply. Use part numbers PK-E03A



Rounded End Caps

FIBERGLASS ONLY. Covered in durable, rugged plastic, these round metal ends protect your support surface from damage.

FACTORY	FIELD	PK-E62 (16'-40')	APPROX. WEIGHT
E62			1.9 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Rigid Pole Grip

FIBERGLASS ONLY. 3/16" x 1" steel-plated bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.

FACTORY	FIELD	PK-E04A (16'-28')	APPROX. WEIGHT
E04		PK-E04B (32'-40')	1.9 LBS
			1.7 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.

*FE7200 & FE4200HD series, ladder size does not apply. Use part numbers PK-E04A



"V" SHAPED ProTop™

FIBERGLASS ONLY. A multifunctional top designed to increase productivity. Can be leaned on walls, poles, and into corners. Featuring: corner grip, pole grip, integrated bumper, tool tether anchor attachment points and work tray; all compact and accessible in a spacious design.

FIELD	PK-1243	APPROX. WEIGHT
		3 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600 series.



Web Pole Grip

FIBERGLASS ONLY. Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Allows top of ladder to lean against poles & pipes.

FACTORY	FIELD	PK-E05R (16'-40')	APPROX. WEIGHT
E05			0.7 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Side Mounted Double Pulley System

Thick rope and double pulley system for added ease of use.

FACTORY	FIELD	PK-1113 (16'-40')	APPROX. WEIGHT
E64			4.3 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Ladder Lash

FIBERGLASS ONLY. Lash for wrapping around objects up to 17" in diameter. Made of 2" Dacron webbing with forged steel snaps and a quick adjustment with clip.

FACTORY	FIELD	PK-E11R (16'-40')	APPROX. WEIGHT
E11			1.1 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Ladder Stabilizer (Fixed/Adjustable)

Fits extension and single ladders with rail up to 4" x 1 3/4". Holds ladder 12" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra-heavy-duty rubber tips. Adjustable Stabilizer has aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows.

MODEL NUMBER	FIXED: LP-2200-00	APPROX. WEIGHT
	ADJUSTABLE: LP-2210-00	6 LBS

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



Wheel Spurs

FIBERGLASS ONLY. Wheel spurs are available as an alternative to our standard cast swivel safety shoe.

FACTORY	FIELD	PK-E30A (16'-28')	APPROX. WEIGHT	0.9 LBS
E30				

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Ladder Jack (Short/Long Body)

Short body ladder jacks (1 pair) span 2 extension ladder rungs. Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.

MODEL NUMBER	SHORT BODY: LP-2100-23 LONG BODY: LP-2100-13	APPROX. WEIGHT	14 LBS 16 LBS
--------------	---	----------------	------------------

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600 series.




Combination Spur & Shoe

FIBERGLASS ONLY. This accessory allows the use of either a spur or a shoe with thick rubber tread.

FACTORY ONLY
E38

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD series.



Levelok® Ladder Stabilizer & Leveler

KEYLOK® QUICK CONNECT SYSTEM. The Levelok® is one of the easiest to use ladder levelers in the market. It can be installed on almost any fiberglass or aluminum extension ladder, and can be operated using only your foot – freeing your hands to hold the ladder.

FACTORY	FIELD	LP-2220-01	APPROX. WEIGHT	8 LBS
E59				

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE4200 series.



Spurs & Shoes With Aluminum Sleeve

FIBERGLASS ONLY. This accessory allows the use of either a spur or a shoe with thick rubber tread. The NEW aluminum sleeve is 10 1/2" long.

FACTORY ONLY	APPROX. WEIGHT	3.8 LBS
E63		



Automatic-Adjusting Leveler

Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.

FACTORY	FIELD	PR091006C-B-PY	APPROX. WEIGHT	6.3 LBS
E34				

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



ProGuards™

ProGuards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™. patent #6,499,563 B1

MODEL NUMBER	LP-5510-00	APPROX. WEIGHT	1.4 LBS
--------------	------------	----------------	---------

COMPATIBLE WITH: FE3200, FE7200, FE0600, FE4200HD, AE1200HD, AE2200, AE1600, AE4200 series.



Pail Shelf Step Ladder Accessory

ONLY FOR STEP LADDERS. Fits all Louisville/Davidson brand step ladders. Detailed instructions and supplied hardware make installation easy.

MODEL NUMBER	LP-2400-00	APPROX. WEIGHT	1.5 LBS
--------------	------------	----------------	---------



Pinnacle Gate

Our optional gate provides full contact on all 4 sides, permitting 360° work access.

FIELD	LP-2807-80	APPROX. WEIGHT	5.75 LBS
-------	------------	----------------	----------

COMPATIBLE WITH: FXP1800HD, FXP1700XL, FXP1700, FCP1400HD series.



STEP LADDERS

FIBERGLASS

FOR APPLICATIONS THAT DEMAND
THE TESTED, TRIED, AND TRUE.

FS1406HD



SERIES
FS1400HD
FIBERGLASS STEPLADDER



1. **Raptor Top™** — multiple tool slots & magnet for increased productivity.

2. Inside spreader braces.

3. Wide back braces.



4. **SHOX™** — Advanced impact absorption protects fiberglass rails against damage.



5. **Raptor Boot™** — Heavy duty boot protects fiberglass.



6. Riveted step construction with gussets.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1404HD	4'	8' 6"	19 9/16"	29"	15	3.7'
FS1406HD	6'	10' 5"	22 9/16"	41"	21	6.3'
FS1408HD	8'	12' 3"	25 9/16"	52"	28	9.7'
FS1410HD	10'	14' 2"	28 9/16"	65"	42	13.2'
FS1412HD	12'	16' 1"	31 9/16"	76"	49	17.4'

- *Assumes 5' 7" person with 12" vertical reach
► Product color may vary and are subject to change.

FS1506



SERIES
FS1500
FIBERGLASS STEPLADDER



1. **Raptor Top™** — multiple tool slots & magnet for increased productivity.

2. Wide back braces


3. Inside spreader braces



4. Double-rivet step construction



5. **SHOX™** — Advanced impact absorption protects fiberglass rails against damage.



6. **Raptor Boot™** — Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1502**	2'	8' 9"	17"	20"	8	2'
FS1504	4'	8' 6"	19 9/16"	29"	14	3.7'
FS1505	5'	9' 5"	21 1/16"	36"	17	4.8'
FS1506	6'	10' 5"	22 9/16"	41"	20	6.3'
FS1507	7'	11' 4"	24 1/16"	47"	22	7.8'
FS1508	8'	12' 3"	25 9/16"	53"	26	9.5'
FS1510	10'	14' 2"	28 9/16"	66"	38	13.1'
FS1512	12'	16' 1"	31 9/16"	77"	47	17.5'

- *Assumes 5' 7" person with 12" vertical reach
► **FS1502 is a folding step stool and is not equipped with the RaptorTop or molded pail shelf
► Add suffix -SS1 to model number for optional molded Pail Shelf. Not available on model FS1502.
► Product color may vary and are subject to change.

FS1502

L-3016-06



SERIES
L-3016
FIBERGLASS STEPLADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™** — multiple tool slots & magnet for increased productivity.
2. Slip-resistant boot.



3. Inside spreader braces.
4. Heavy-duty gusset bracing.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3016-04	4'	8' 6"	18 13/16"	28"	14	1.8'
L-3016-06	6'	10' 4"	21 13/16"	41"	19	5.2'
L-3016-08	8'	12' 3"	24 13/16"	53"	26	8'
L-3016-10	10'	14' 2"	27 13/16"	65"	36	11.3'
L-3016-12	12'	16' 1"	30 13/16"	77"	47	15'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ Add suffix -S51 to model number for optional molded Pail Shelf. Available on all sizes and most step models
- ▶ Product color may vary and are subject to change.

FS2006



SERIES
FS2000
FIBERGLASS STEPLADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™** — multiple tool slots for increased productivity.
2. Pinch-resistant spreader braces.
3. **SHOX™** — Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS2004	4'	8' 6"	18 13/16"	29"	12	3.6'
FS2005	5'	9' 5"	20 5/16"	35"	15	4.8'
FS2006	6'	10' 4"	21 13/16"	41"	17	6.2'
FS2008	8'	12' 3"	24 13/16"	52"	22	9.3'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **FS2002 is a folding step stool and is not equipped with the ProTop or molded pail shelf
- ▶ Add suffix -S51 to model number for optional molded Pail Shelf. Not available on model FS2002.
- ▶ Product color may vary and are subject to change.

FS4006



SERIES
FS4000
FIBERGLASS STEPLADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™** — multiple tool slots for increased productivity.*
2. Pinch-resistant spreader braces.
3. **SHOX™** — Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS4004	4'	8' 6"	18 13/16"	29"	11	3.3'
FS4005	5'	9' 5"	21 13/16"	35"	14	4.4'
FS4006	6'	10' 4"	23 5/16"	41"	16	5.7'
FS4008	8'	12' 3"	24 13/16"	53"	21	8.5'


- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ *ProTop does not have magnet feature on FS4000 series
- ▶ Add suffix -S51 to model number to order optional Molded Pail Shelf
- ▶ Product color may vary and are subject to change.

FS1306HD



SERIES
FS1300HD
FIBERGLASS STEPLADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge metal top with tool slots.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. Full metal boot with thick rubber thread.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1304HD	4'	8' 6"	19.42"	29"	19	2.1'
FS1306HD	6'	10' 4"	22.42"	41"	22	3.5'
FS1308HD	8'	12' 3"	25.42"	54"	25	5.2'
FS1310HD	10'	14' 2"	28.42"	66"	28	7.1'
FS1312HD	12'	16' 1"	31."	77"	31	9.2'


- *Assumes 5' 7" person with 12" vertical reach
➤ Product color may vary and are subject to change.

FM1406HD



SERIES
FM1400HD
FIBERGLASS TWIN FRONT LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge metal top.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1404HD	4'	8' 6"	19 9/16"	37"	19	4.7'
FM1406HD	6'	10' 4"	22 9/16"	52"	26	8.3'
FM1408HD	8'	12' 3"	25 9/16"	67"	37	12.3'
FM1410HD	10'	14' 2"	28 9/16"	82"	56	17.1'
FM1412HD	12'	16' 1"	31 9/16"	97"	72	23.1'
FM1414HD**	14'	18'	34 9/16"	112"	85	29.1'
FM1416HD**	16'	19' 11"	37 9/16"	127"	96	36'

- *Assumes 5' 7" person with 12" vertical reach
➤ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.
➤ **14'-16' duty rating exceeds OSHA standards.
➤ Product color may vary and are subject to change.

FM1506



SERIES
FM1500
FIBERGLASS TWIN FRONT LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge steel hinges.
2. Inside spreader braces.
3. Double-rivet step construction.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1503	3'	7' 6"	18 1/16"	31"	14	3.3'
FM1504	4'	8' 6"	19 9/16"	38"	19	4.7'
FM1506	6'	10' 5"	22 9/16"	54"	25	8.0'
FM1508	8'	12' 3"	25 9/16"	68"	34	12.1'
FM1510	10'	14' 2"	28 9/16"	83"	44	16.8'

- *Assumes 5' 7" person with 12" vertical reach
➤ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.
➤ Product color may vary and are subject to change.



PINNACLE

GET MORE ROOM TO GET MORE DONE.

SERIES

FXP1800HD

FIBERGLASS PINNACLE
PLATFORM LADDER

TYPE IAA

375

LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

19% LARGER PLATFORM
vs. other leading ladders.

WAIST-HIGH HANDRAIL
at tool belt height
for added comfort.

**WORK FACING
MULTIPLE DIRECTIONS**
It is not recommended that
worker face ladder steps while
on platform.

HEAT TRANSFER TOP
No more OSHA fines due to
missing duty rating labels.
Scratch and UV resistant.

ANSI

See ANSI A14.5 for details
on ANSI A14.5
MEETS
OSHA
REQUIREMENTS

1. **ProTop™** —
multiple tool slots
for increased
productivity.



2. Larger platform for
added comfort.



3. **SHOX™**—Advanced
impact absorption
protects fiberglass
rails against damage.



4. **Raptor Boot™**—
Heavy duty boot
protects fiberglass.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1802HD	1' 11"	3"	8' 6"	21 7/8"	36"	19	8'
FXP1803HD	2' 10"	3"	9' 5"	23 3/8"	42"	23	10.4'
FXP1804HD	3' 9"	3"	10' 5"	24 7/8"	48"	26	12.8'
FXP1806HD	5' 8"	3"	12' 3"	27 7/8"	62"	32	18.4'
FXP1808HD	7' 7"	3"	14' 2"	30 7/8"	74"	49	24.7'
FXP1810HD**	9' 6"	3"	16' 1"	33 7/8"	88"	64	32'
FXP1812HD**	11' 5"	3"	18'	36 7/8"	102"	76	40.1'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ **Special duty: manufacturer tested to 375 lbs.

▶ Product color may vary and are subject to change.

SERIES

FXP1700

FIBERGLASS PINNACLE
PLATFORM LADDER

TYPE IA

300

LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

WIDE PLATFORM
Larger than other ladders
in its class.

PERFECT TOOL BELT HEIGHT
Puts every tool on your tool belt
within reach.

**WORK FACING
MULTIPLE DIRECTIONS**
It is not recommended that
worker face ladder steps while
on platform.

HEAT TRANSFER TOP
No more OSHA fines due to
missing duty rating labels.
Scratch and UV resistant.

ANSI

See ANSI A14.5 for details
on ANSI A14.5
MEETS
OSHA
REQUIREMENTS

1. **ProTop™** — multiple
tool slots for increased
productivity.



2. Larger platform for
added comfort.



3. **SHOX™**—Advanced
impact absorption
protects fiberglass
rails against damage.



4. **Raptor Boot™**—
Heavy duty boot
protects fiberglass.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1702	1' 11"	3"	8' 6"	21 3/4"	32"	16	7.4'
FXP1703	2' 10"	3"	9' 5"	23 1/4"	38"	22	9.6'
FXP1704	3' 9"	3"	10' 5"	24 3/4"	44"	26	12'
FXP1706	5' 8"	3"	12' 3"	27 3/4"	56"	30	17.3'
FXP1708	7' 7"	3"	14' 2"	30 3/4"	70"	44	23.6'
FXP1710	9' 6"	3"	16' 1"	33 3/4"	82"	59	30.7'
FXP1712	11' 5"	3"	18'	36 3/4"	92"	71	38.7'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ Product color may vary and are subject to change.



2-IN-1
DESIGN

for Standing and Leaning



LEANING LADDERS

AN INNOVATION THAT'S UNRIVALED FROM THE TOP DOWN.

FCP1404HD



TYPE IAA
375 LBS.
 LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

ANSI
Approved by the American National Standards Institute
 ANSI A14.5

OSHA
Approved by the Occupational Safety and Health Administration

SERIES

FCP1400HD

FIBERGLASS

PLATFORM TO LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - Includes multiple tool slots, and two tool tether anchor attachment points for increased productivity.



3. Larger Platform - Spacious platform allows for more secure, comfortable movement. Overflow slots keep the surface clear.



4. Waist-High Handrail - 36" heavy-duty handrail runs from platform to peak providing a secure 3-sided barrier.



5. **Raptor Boot™** - Heavy-duty boot protects fiberglass.



6. **SHOX™** - Advanced impact absorption protects fiberglass rails against damage.

MODEL	PLATFORM HEIGHT	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	HIGHEST STANDING LEVEL	MAX. REACH*
FCP1402HD	1' 11"	21 15/16"	30"	23	8.8'	1' 11"	8' 6"
FCP1403HD	2' 10"	23 15/16"	36"	27	11.4'	2' 10"	9' 5"
FCP1404HD	3' 10"	25 7/16"	41"	34	14.1'	3' 10"	10' 5"
FCP1406HD	5' 8"	28 3/8"	54"	40	20.1'	5' 8"	12' 3"
FCP1408HD	7' 7"	31 5/8"	66"	53	27.2'	7' 7"	14' 2"

► *Assumes 5' 7" person with 12" vertical reach

► Product color may vary and are subject to change.

FXS1406HD



SERIES

FXS1400HD


FIBERGLASS STEP TO
LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - with "V" shape to fit into corners, includes magnet.



3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.



5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELF LADDER		STEP LADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FXS1404HD	4'	20 5/16"	24"	16	4.0'	11"	7' 6"	1' 11"	8' 6"
FXS1406HD	6'	23 5/16"	36"	22	6.8'	2' 10"	9' 5"	3' 9"	10' 5"
FXS1408HD	8'	26 5/16"	48"	30	10.1'	4' 9"	11' 4"	5' 8"	12' 3"
FXS1410HD	10'	29 5/16"	60"	38	14.0'	6' 8"	13' 3"	7' 7"	14' 2"
FXS1412HD	12'	32 5/16"	71"	46	18.5'	8' 6"	15' 1"	9' 6"	16' 1"

- *Assumes 5' 7" person with 12" vertical reach
- Product color may vary and are subject to change.

FXS1506



SERIES

FXS1500

FIBERGLASS STEP TO
LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - with "V" shape to fit into corners, includes magnet.



3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.



5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELF LADDER		STEP LADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FXS1504	4'	20 5/16"	24"	15	4.0'	11"	7' 6"	1' 11"	8' 6"
FXS1506	6'	23 5/16"	36"	20	6.8'	2' 10"	9' 5"	3' 9"	10' 5"
FXS1508	8'	26 5/16"	48"	27	10.1'	4' 9"	11' 4"	5' 8"	12' 3"
FXS1510	10'	29 5/16"	59"	38	14.0'	6' 8"	13' 3"	7' 7"	14' 2"
FXS1512	12'	32 5/16"	71"	46	18.5'	8' 6"	15' 1"	9' 6"	16' 1"

- *Assumes 5' 7" person with 12" vertical reach
- Product color may vary and are subject to change.

CROSS X STEP_{GO}

2 **IN** 1

**LEANABLE
LADDER**

- CLOSER TO YOUR WORK
- LESS OVERREACHING
- LESS TRIPS TO THE TRUCK
- MORE CONFIDENCE TO GET THE TASK DONE

ANSI
Meets or exceeds requirements
of American National Standard
ANSI A14.5

MEETS
OSHA
REQUIREMENTS

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

SERIES
FGS1500


FIBERGLASS
STEP TO LEANING LADDER



1. **RaptorGoTop™**
Rubber bumpers allow you to lean ladder on walls



2. **SECURITY**
locking latch to secure rear section



3. **STABILITY**
raptorgoboot™ - curved, heavy duty, slip-resistant shoe that adapts to the angle of work



4. **PRACTICAL DESIGN**
keep tools close and your hands free with the RaptorGoTop™



5. **SPACE SAVING DESIGN**
fit into smaller spaces (4ft - 8ft only)



6. **DURABILITY**
SHOX™ - advanced impact absorption protects fiberglass rails against damage




STEPLADDER



LEANING LADDER

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES	SHELF LADDER		STEPLADDER	
						HIGHEST STANDING LEVEL	MAX. REACH*	HIGHEST STANDING LEVEL	MAX. REACH*
FGS1504	4'	20 1/2"	28 1/8"	14	3.6'	11"	7' 6"	1' 11"	8' 6"
FGS1505	5'	22"	34 1/16"	16.7	4.8'	1' 11"	8' 6"	2' 10"	9' 5"
FGS1506	6'	23 1/2"	40"	19.5	6.2'	2' 10"	9' 5"	3' 10"	10' 4"
FGS1507	7'	25"	45 15/16"	22.5	7.6'	3' 10"	10' 4"	4' 9"	11' 3"
FGS1508	8'	26 1/2"	51 7/8"	26	9.2'	4' 9"	11' 3"	5' 8"	12' 3"
FGS1510	10'	29 1/4"	64 1/4"	36.5	12.7'	6' 8"	13' 2"	7' 7"	14' 2"
FGS1512	12'	32 1/4"	77 7/16"	45.6	16.8'	8' 6"	15' 1"	9' 6"	16' 1"

- *Assumes 5' 7" person with 12" vertical reach
► Product color may vary and are subject to change.

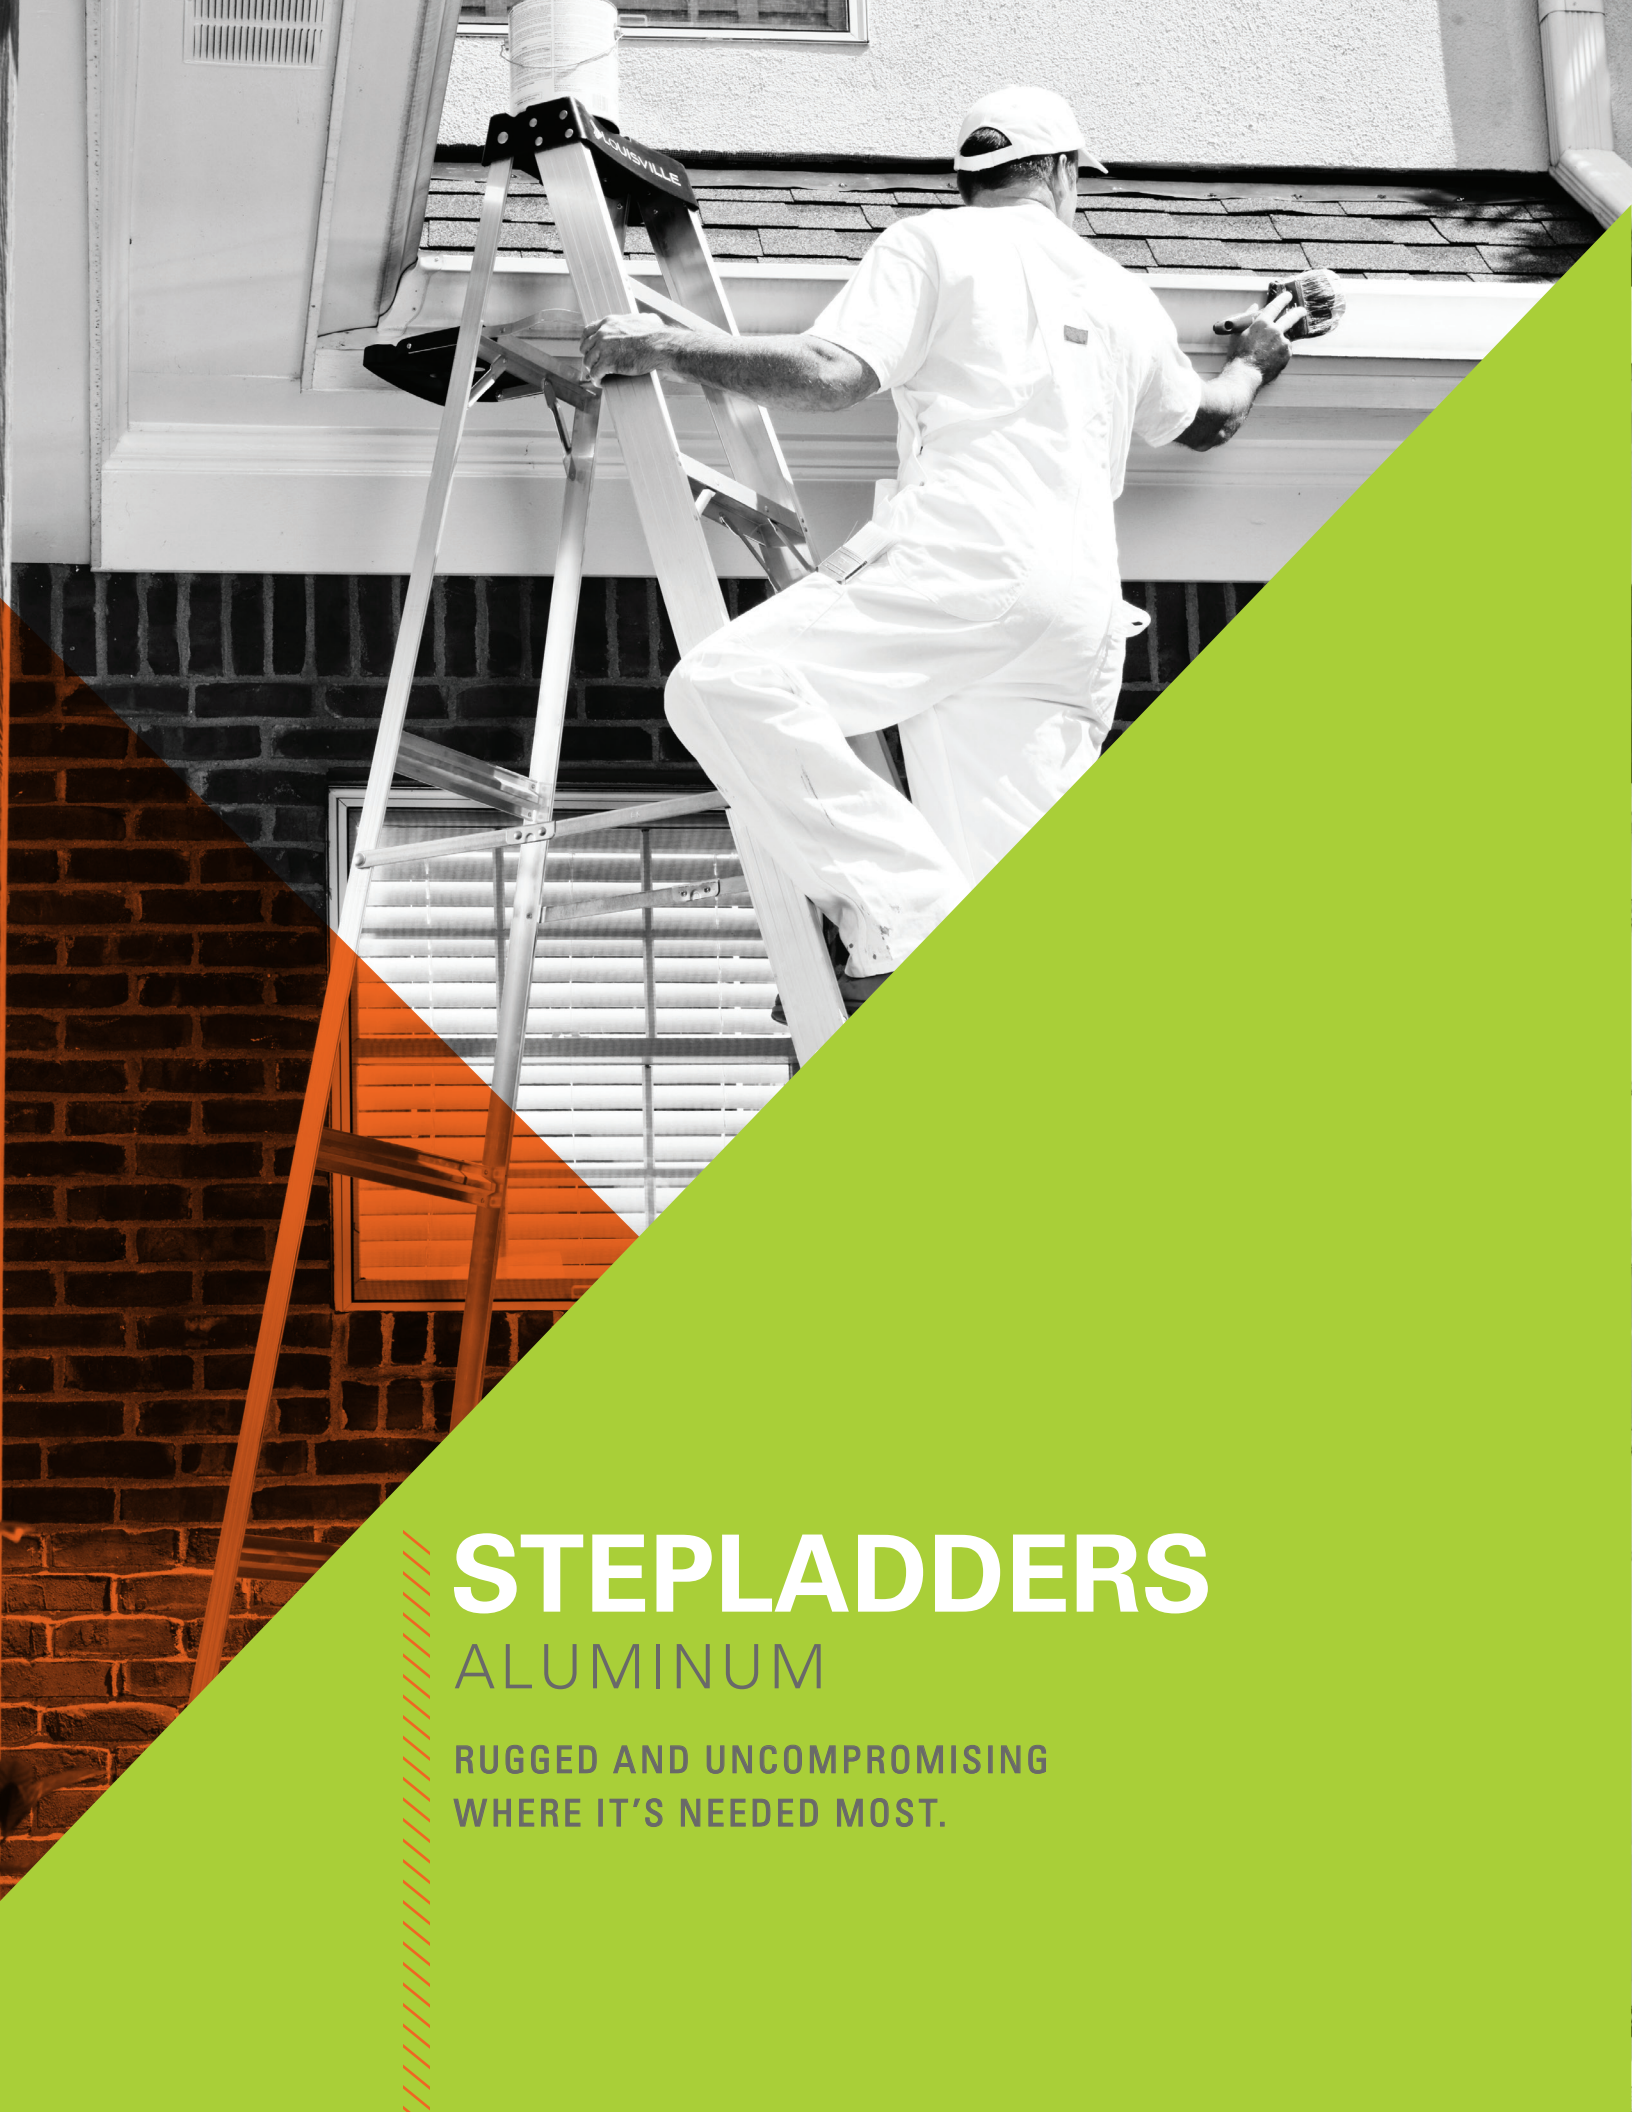

STEPLADDERS

ALUMINUM

RUGGED AND UNCOMPROMISING
WHERE IT'S NEEDED MOST.

AS3006



ALSO AVAILABLE
AS3002
 FOLDING STEP STOOL

SERIES
AS3000
 ALUMINUM STEP LADDER




1. **ProTop™**—multiple tool slots for increased productivity.



2. Molded pail shelf**.



3. Center-pull spreader braces***.



4. Heavy-duty gusset bracing.



5. Slip-resistant rubber feet.

TYPE IA
300 LBS.
 LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS3002**	2'	8' 8"	16 5/8"	20 1/2"	6	1.5'
AS3004	4'	8' 6"	18 5/8"	29"	13	4.1'
AS3006	6'	10' 5"	21 5/8"	40"	17	6.9'
AS3008	8'	12' 3"	24 5/8"	53"	23	10.3'
AS3010	10'	14' 2"	27 5/8"	65"	29	14.4'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ **AS3002 is a folding step stool and is not equipped with the molded pail shelf

▶ ***Center-pull spreader is only available on 4' & 6' models—those outside spreader brace otherwise

AS2106



SERIES
AS2100
 ALUMINUM STEP LADDER



1. **ProTop™** — multiple tool slots for increased productivity.



2. Molded pail shelf.



3. Pinch-resistant spreader braces.



4. Steel gusset bracing.



5. Slip-resistant rubber feet.

TYPE I
250 LBS.
 LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS2104	4'	8' 6"	18 5/8"	28"	11	3.8'
AS2106	6'	10' 4"	21 5/8"	40"	15	6.7'
AS2108	8'	12' 3"	24 5/8"	52"	22	9.6'
AS2110	10'	14' 2"	27 5/8"	64"	27	13.5'

▶ *Assumes 5' 7" person with 12" vertical reach

AS4006




SERIES
AS4000
ALUMINUM STEP LADDER



1. Molded top with handyman's tool slots.

2. Molded pail shelf.

3. Pinch-resistant spreader braces.



4. Steel gusset bracing.


5. Slip-resistant rubber feet.

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS4004	4'	8' 6"	17 15/16"	28"	10	3.1'
AS4006	6'	10' 5"	20 9/16"	40"	13	5.2'
AS4008	8'	12' 3"	23 3/16"	51"	17	8.3'

► *Assumes 5' 7" person with 12" vertical reach

AP5006



SERIES
AP5000
ALUMINUM MOBILE
PLATFORM LADDER



1. Top rail guard.

2. Handrails.

3. Slip-resistant platform.



4. Double-rivet step construction.



5. Heavy-duty gusset bracing.



6. **BODYWEIGHT**
ACTIVATED CASTER TECHNOLOGY

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP5004	3' 10"	10' 5"	24 1/4"	44"	42	13'
AP5006	5' 8"	12' 3"	27 1/4"	56"	56	19'
AP5008	7' 7"	14' 2"	30 1/4"	67"	68	27'
AP5010	9' 6"	16' 1"	33 1/4"	80"	82	34.6'

► *Assumes 5' 7" person with 12" vertical reach

► All casters are 3" size



STEP STOOLS

BRING EVERYTHING WITHIN REACH

FY8002



SERIES
FY8000
FIBERGLASS INDUSTRIAL
STEP STAND

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**—
with slip resistant
tread to stand on.



2. Large heavy duty
metal shoe with
slip-resistant rubber
tread.



3. Heavy duty inside
spreader brace.



4. 6" step depth with
slip-resistant tread.



5. Heavy duty steel
double rivet gussets



6. Optional casters (S55)
and handle (S56)*.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FY8001**	1'	14" x 9 1/4"	7' 8"	6"	15 3/4"	16"	8	1.8'
FY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/4"	21"	13	2.8'
FY8003	2' 09"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	18	4.6'

► *Assumes 5' 7" person with 12" vertical reach

► **Casters (S55) and handle (S56) option not available for FY8001 model

► **Does not meet CSA

► To purchase FY8002 with both options (casters and handle), use suffix FY8002-S55S56

► Product color may vary and are subject to change.

AY8002



SERIES
AY8000
ALUMINUM INDUSTRIAL
STEP STAND

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**—
with slip-resistant
tread to stand on.



2. Large heavy duty metal
shoe with slip-resistant
rubber tread.



3. Heavy duty inside
spreader brace.



4. 6" step depth with
slip-resistant tread.



5. Heavy duty steel
double rivet gussets.



6. Optional casters (S55)
and handle (S56)*.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AY8001**	1'	14" x 9 1/4"	7' 8"	6"	15 3/4"	16"	8	1.8'
AY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/4"	21"	13	2.6'
AY8003	2' 9"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	19	4.2'

► *Assumes 5' 7" person with 12" vertical reach

► **Casters (S55) and handle (S56) option not available for AY8001 model

► **Does not meet CSA

► To purchase AY8002 with both options (casters and handle), use suffix AY8002-S55S56

L-3042-03



SERIES
L-3042
FIBERGLASS MINI
WORKING PLATFORM

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. 12" Wide slip-
resistant standing
surface.



2. Easy-use locking
hinge.



3. Durable handle for
easy transportation.



4. Slip-resistant
rubber feet.



5. Durable
non-conductive
fiberglass rails.

MODEL	HEIGHT TO PLATFORM	MAX. REACH*	WORK AREA	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3042-03	21"	8' 4"	3' x 12"	16 1/4"	48"	12	2.2'

► *Assumes 5' 7" person with 12" vertical reach

► Product color may vary and are subject to change.

L-2011-03



SERIES
L-2011
ALUMINUM
STOCKING STOOL

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Portable casters
provide easy
transportation.



2. 24" Tall handrail
for support,
providing good
balance &
stability.



3. Large slip
resistant rubber
standing steps.



4. Large footing with
slip-resistant tread
for stability.



5. Two locking hinges on
the handrail visually
show if the top is
secure in the open
position.



6. Folds to store
in tight spaces.

MODEL	LADDER SIZE	PLATFORM HEIGHT	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2011-02	2 STEP	1' 5"	8' 0"	21"	23"	18	2.2'
L-2011-03	3 STEP	2' 2"	8' 9"	22"	34"	22	3.3'
L-2011-04	4 STEP	2' 11"	9' 6"	22 1/2"	44"	25	4.2'

► *Assumes 5' 7" person with 12" vertical reach

INDUSTRIAL USE • INDUSTRIAL USE • INDUSTRIAL USE • INDUSTRIAL

QWIK STEP

LIGHTWEIGHT & COMPACT

STEP STOOL



TYPE IAA

375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

SERIES

L-4461

STEEL
STEP STOOL

ANSI

With a rated capacity of 375 lbs. (170 kg) meets ANSI A14.5

OSHA

100% STEEL



1. LIGHTWEIGHT & EASY TO CARRY

Lightweight design and ergonomic handle make this ideal for on-the-go use.



2. COMPACT DESIGN

Only 2 inches thick for effortless storage when not in use.



3. HEAVY DUTY CONSTRUCTION

Made of steel to support up to 375 lbs.



4. SPACIOUS PLATFORM

Large platform with slip resistant tread.



5. SLIP RESISTANT SHOES


Provides slip resistant grip and protects your floors from damage.

L-4461-02



MODEL	LADDER SIZE	HEIGHT TO PLATFORM	MAX REACH*	PLATFORM DIMENSIONS	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	STORAGE DEPTH
L-4461-02	2 STEP	1' 6"	8' 1"	13 3/4" W	1' 5 3/4"	2'	10	2"

► *Assumes 5' 7" person with 12" vertical reach

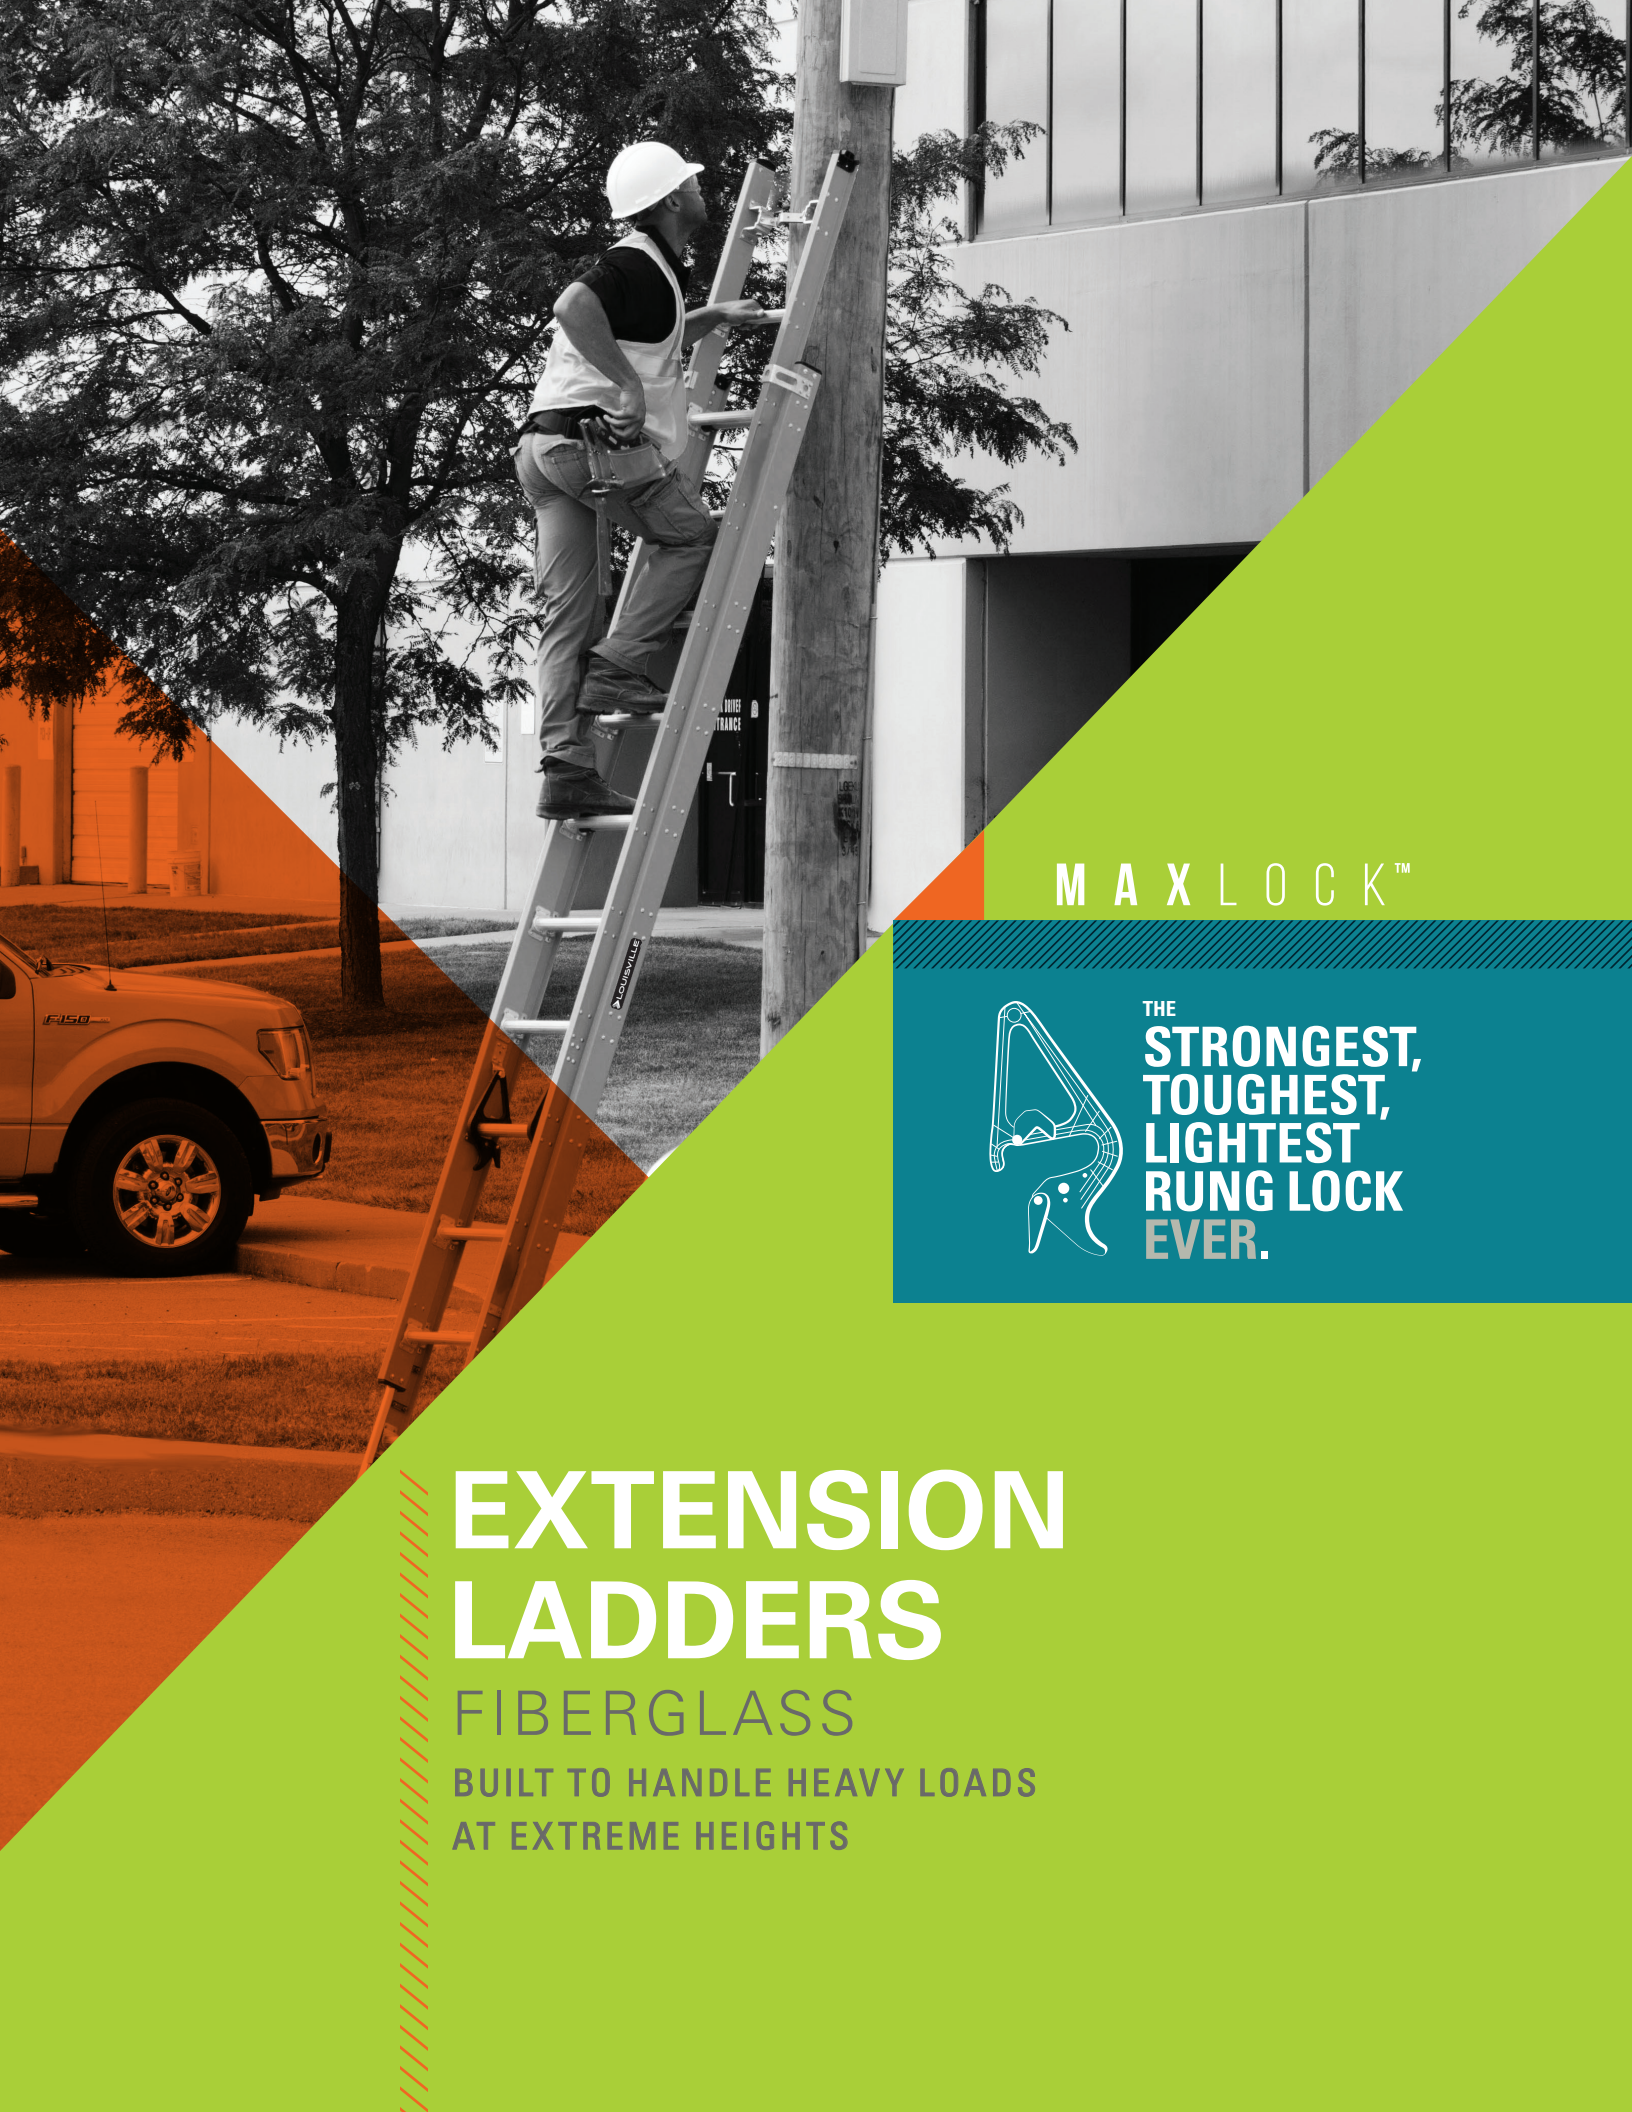

MAX LOCK™



THE
**STRONGEST,
TOUGHEST,
LIGHTEST
RUNG LOCK
EVER.**

EXTENSION LADDERS

FIBERGLASS

BUILT TO HANDLE HEAVY LOADS
AT EXTREME HEIGHTS

FE4220HD



SERIES
FE4200HD
FIBERGLASS EXTENSION
LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. Aluminum rung connector plates.



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.

MAX LOCK™

► D-shaped rungs

RAIL DEPTH	
16-28' models	3 1/4"
32' model	3 1/16"
STACK HEIGHT	
16-28' models	6"
32' model	6 1/16"
INSIDE WIDTH	
base	15 3/8"
fly	13 1/16"
OUTSIDE WIDTH	
base	17 3/4"
fly	16 1/16"

D-RUNG MODELS	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE4216HD**	16'	8'	13'	15' 11"	41	7.6'
FE4220HD	20'	10'	17'	19' 10"	50	9.5'
FE4224HD	24'	12'	21'	23' 8"	58	11.2'
FE4228HD	28'	14'	25'	27' 7"	67	13.1'
FE4232HD	32'	16'	29'	31' 5"	73	14.8'

- *Assumes 5' 7" person with 12" vertical reach
- **Available in D-shaped or round rungs. Does not include rope and pulley
- ***Special order item
- Product color may vary and are subject to change.

L-3022-20PT



SERIES
L-3022-XXPT
FIBERGLASS EXTENSION
LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. ProTop™ — V-shaped top with multiple tool slots.
2. Outside slide guides.
3. D-shaped rungs.



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.
6. Direct rung - rail connection.

MAX LOCK™

► D-shaped rungs

RAIL DEPTH	INSIDE WIDTH	BASE	FLY
20-28' models	20-28' models	14 1/16"	13 1/16"
32' model	32' model	15 5/16"	14 5/16"
STACK HEIGHT	OUTSIDE WIDTH	BASE	FLY
16-28' models	20-28' models	17 1/16"	16 1/16"
32-40' models	32' model	17 1/16"	16 1/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	19' 10"	44	9.8'
L-3022-24PT	24'	12'	21'	23' 8"	53	11.6'
L-3022-28PT	28'	14'	25'	27' 7"	60	13.5'
L-3022-32PT	32'	16'	29'	31' 5"	70	13.5'

- *Assumes 5' 7" person with 12" vertical reach
- Product color may vary and are subject to change.

FE3220



SERIES
FE3200
FIBERGLASS EXTENSION
LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps
2. Outside slide guides
3. D-shaped rungs



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.
6. Direct rung - rail connection

MAX LOCK™

► D-shaped rungs

RAIL DEPTH	STACK HEIGHT
16-28' models	6 1/4"
32' model	6 1/2"
32-40' models	6 1/2"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3216**	16'	8'	13'	15' 11"	31	7.8'
FE3220	20'	10'	17'	19' 10"	43	9.8'
FE3224	24'	12'	21'	23' 8"	51	11.6'
FE3228	28'	14'	25'	27' 7"	59	13.5'
FE3232	32'	16'	29'	31' 5"	71	15.3'
FE3236	36'	18'	32'	34' 4"	79	17.7'
FE3240	40'	20'	35'	37' 3"	93	20.3'

- *Assumes 5' 7" person with 12" vertical reach
- **Does not include rope and pulley
- Product color may vary and are subject to change.

INSIDE WIDTH	BASE	FLY	OUTSIDE WIDTH	BASE	FLY
16-28' models	14 1/16"	13 1/16"	16-28' models	17 1/16"	16 1/16"
32-40' models	15 5/16"	14 5/16"	32' model	17 1/16"	16 1/16"

FE3108



SERIES
FE3100
FIBERGLASS
SINGLE LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH		INSIDE WIDTH		OUTSIDE WIDTH	
8-14' models	3 1/4"	8-14' models	14 11/16"	8-14' models	17 1/16"
16-20' models	3 5/16"	16-20' models	15 5/16"	16-20' models	17 11/16"



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Swivel safety shoe with overmolded polymer tread.
4. Direct rung - rail connection.

MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3108	8'	11' 1"	16	4.3'
FE3110	10'	13'	21	5.4'
FE3112	12'	15'	25	6.4'
FE3116	16'	18' 10"	36	8.8

- *Assumes 5' 7" person with 12" vertical reach
- *Special order item
- Product color may vary and are subject to change.

► *D-shaped rungs

FE7220



SERIES
FE7200
FIBERGLASS EXTENSION
LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH		INSIDE WIDTH	
16-28' models	3 1/4"	base	15"
32' model	3 5/16"	fly	13 11/16"
36-40' models	3 11/32"		
		OUTSIDE WIDTH	
		base	17 3/8"
		fly	16 1/16"
		STACK HEIGHT	
		6 1/4"	



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. Aluminum rung connector plates.



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7216*	16'	8'	13'	15' 11"	34	7.0'
FE7220	20'	10'	17'	19' 10"	45	8.7'
FE7224	24'	12'	21'	23' 8"	53	10.3'
FE7228	28'	14'	25'	27' 7"	62	12.0'
FE7232	32'	16'	29'	31' 5"	72	13.7'
FE7236	36'	18'	32'	34' 4"	110	15.4'
FE7240	40'	20'	35'	37' 3"	117	17.0'

- *Assumes 5' 7" person with 12" vertical reach
- *Does not include rope or pulley
- Product color may vary and are subject to change.

MAXLOCK™

► *D-shaped rungs

FE0620



SERIES
FE0600
FIBERGLASS EXTENSION
LADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH	
3 1/4"	
STACK HEIGHT	
6 1/4"	
INSIDE WIDTH	
base	14 11/16"
fly	13 11/16"
OUTSIDE WIDTH	
base	17 1/16"
fly	16 1/16"



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. D-shaped rungs.



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.
6. Direct rung - rail connection.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE0616*	16'	8'	13'	15' 11"	28	6.3'
FE0620	20'	10'	17'	19' 10"	39	8.0'
FE0624	24'	12'	21'	23' 8"	48	9.6'
FE0628**	28'	14'	25'	27' 7"	53	11.2'

- *Assumes 5' 7" person with 12" vertical reach
- *Does not include rope or pulley
- **Special order item
- Product color may vary and are subject to change.

MAXLOCK™

► *D-shaped rungs

FE8908




► *Round rungs

SERIES
FE8900
FIBERGLASS MANHOLE
LADDER



1. Convenient 14 1/2" -width design.



2. High -vis rail protectors.



3. Round rungs.



4. Heavy duty slip-resistant shoes.

RAIL DEPTH 3 1/4"	MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
	FE8908	8'	11' 1"	17.5	2.8'
INSIDE WIDTH 12 1/8"	FE8910	10'	13'	21	3.5'
	FE8912	12'	15'	25	4.2'
OUTSIDE WIDTH 14 1/2"	FE8914	14'	16' 11"	30	4.9'
	FE8916	16'	18' 10"	34	5.6'

- *Assumes 5' 7" person with 12" vertical reach
► Product color may vary and are subject to change.

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

FH1007



SERIES
FH1000
FIBERGLASS SHELF LADDER



1. Rubber bumper.



2. Angled steps.



3. Serrated aluminum steps.



4. Double-rivet step construction.



5. Heavy-duty gusset bracing.




6. Overmolded shoe with increased resistance of wear and tear.

MODEL	LADDER SIZE	MAX. REACH*	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FH1006	6'	9' 5"	15 3/16"	10	2.4'
FH1008	8'	11' 4"	15 3/16"	14	3'
FH1010	10'	13' 3"	15 3/16"	20	3.8'

- *Assumes 5' 7" person with 12" vertical reach
► Product color may vary and are subject to change.

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

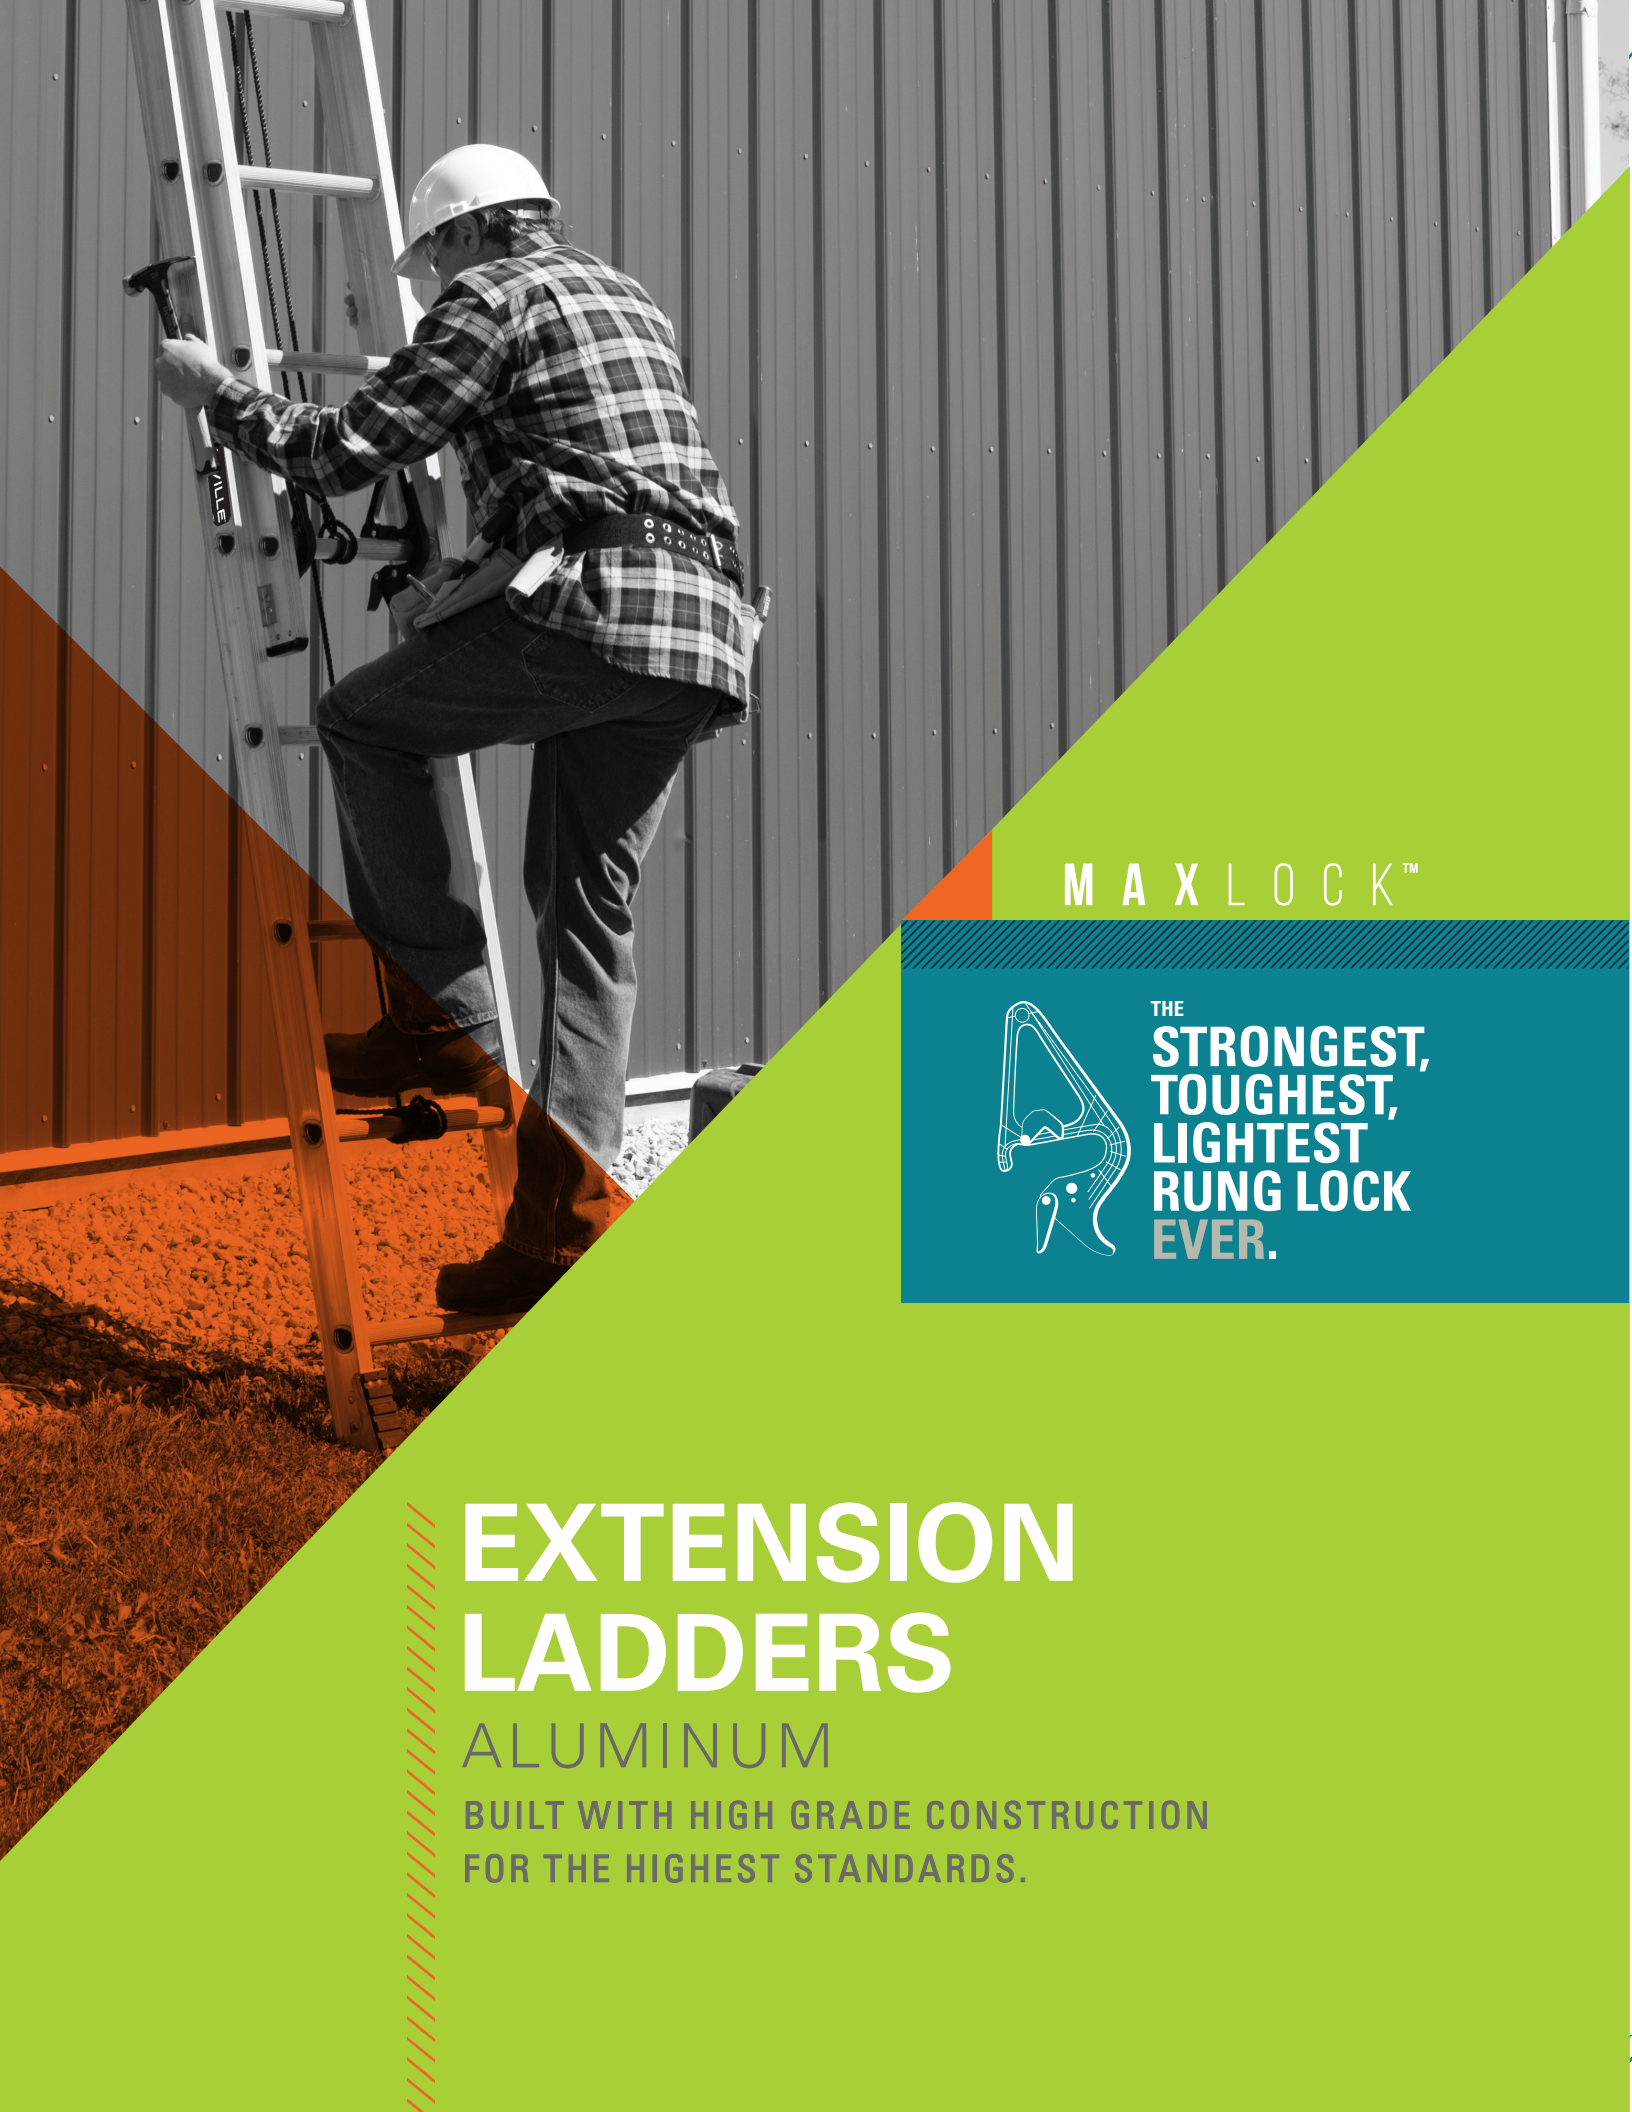

M A X L O C K™



THE
**STRONGEST,
TOUGHEST,
LIGHTEST
RUNG LOCK
EVER.**

EXTENSION LADDERS

ALUMINUM

BUILT WITH HIGH GRADE CONSTRUCTION
FOR THE HIGHEST STANDARDS.

AE1220HD



SERIES
AE1200HD
ALUMINUM
EXTENSION LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH	
16-40' models	3"
44-48' models	4"

STACK HEIGHT	
16-40' models	3 1/4"
44-48' models	4 1/8"

INSIDE WIDTH	BASE	FLY
16-40' models	16 7/16"	14 5/16"
44-48' models	18"	15 1/16"

OUTSIDE WIDTH	BASE	FLY
16-40' models	19 1/16"	16 15/16"
44-48' models	20 5/8"	18 5/16"

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **Does not include rope or pulley
- ▶ ***300lbs. Type IA-rated standard ladder
- ▶ ****250 lbs. Type I-rated standard ladder



1. Aluminum caps rail end caps.
2. Outside slide guides.
3. D-shaped rungs.



4. MaxLock™ with QuickLatch™.
5. Full I-beam.
6. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1216HD**	16'	8'	13'	15' 11"	38	7.8'
AE1220HD	20'	10'	17'	19' 10"	44	9.7'
AE1224HD	24'	12'	21'	23' 8"	52	11.5'
AE1228HD	28'	14'	25'	27' 7"	62	13.3'
AE1232HD	32'	16'	29'	31' 5"	71	15.2'

MAX LOCK™

▶ *D-shaped rungs

AE2110




SERIES
AE2100
ALUMINUM
SINGLE LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH
3"

INSIDE WIDTH
15 9/16"

OUTSIDE WIDTH
17 13/16"



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Full I-beam.
4. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2108	8'	11' 1"	15	4.8'
AE2110	10'	13'	18	6.0'
AE2112	12'	15'	22	7.1'
AE2114	14'	16' 11"	28	8.4'
AE2116	16'	18' 10"	30	9.5'
AE2118	18'	20' 9"	38	10.7'
AE2120	20'	22' 8"	42	11.8'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ *D-shaped rungs

AE2200



SERIES
AE2200
ALUMINUM
EXTENSION LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH
3"

STACK HEIGHT
5 1/4"

INSIDE WIDTH	BASE	FLY
16-24' models	15 9/16"	13 1/16"
28-40' models	18 3/8"	35 1/4"

OUTSIDE WIDTH	BASE	FLY
16-24' models	17 13/16"	15 5/16"
28-40' models	18"	15 7/8"



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. D-shaped rungs.



4. MaxLock™ with QuickLatch™.
5. Full I-beam.
6. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2216*	16'	8'	13'	15' 11"	30	7.5'
AE2220	20'	10'	17'	19' 10"	37	9.3'
AE2224	24'	12'	21'	23' 8"	43	11.1'
AE2228	28'	14'	25'	27' 7"	56	13.1'
AE2232	32'	16'	29'	31' 5"	66	14.8'
AE2236	36'	18'	32'	34' 4"	76	16.7'
AE2240	40'	20'	35'	37' 3"	84	18.5'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ ** Does not include rope or pulley

MAX LOCK™

▶ *D-shaped rungs

AE3220



SERIES
AE3200
ALUMINUM
EXTENSION LADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.
3. Modified I-beam.



3. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.

RAIL DEPTH	
3"	
STACK HEIGHT	
5 1/4"	
INSIDEWIDTH	
base	15 1/4"
fly	13 15/16"
OUTSIDEWIDTH	
base	17 1/2"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE3216**	16'	8'	13'	15' 11"	27	7.3'
AE3220	20'	10'	17'	19' 10"	32	9.0'
AE3224	24'	12'	21'	23' 8"	38	10.8'
AE3228	28'	14'	25'	27' 7"	53	12.5'
AE3232	32'	16'	29'	31' 5"	60	14.3'
AE3236	36'	18'	32'	34' 4"	72	17.8'
AE3240	40'	20'	35'	37' 3"	80	17.8'

- *Assumes 5' 7" person with 12" vertical reach
► ** Does not include rope or pulley


MAXLOCK™
► *D-shaped rungs

AE4220PG



SERIES
AE4200PG
ALUMINUM
EXTENSION LADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProGrip™**— Slip resistant tread protects work surface.
2. D-shaped rungs.
3. Modified I-beam.



4. **MaxLock™** with **QuickLatch™**.
5. Swivel safety shoe with overmolded polymer tread.

RAIL DEPTH	
3"	
STACK HEIGHT	
5 1/4"	
INSIDEWIDTH	
base	15 1/4"
fly	14 5/16"
OUTSIDEWIDTH	
base	17 1/8"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE4216PG**	16'	8'	13'	15' 11"	27	6.2'
AE4220PG	20'	10'	17'	19' 10"	32	8.8'
AE4224PG	24'	12'	21'	23' 8"	38	9.1'
AE4228PG	28'	14'	25'	27' 7"	48	10.5'
AE4232PG	32'	16'	29'	31' 5"	58	12'
AE4240PG	40'	20'	35'	37' 3"	80	14.9'

- *Assumes 5' 7" person with 12" vertical reach
► ** Does not include rope or pulley

MAXLOCK™
► *D-shaped rungs

L-2321-16



SERIES
L-2321
ALUMINUM
EXTENSION LADDER

TYPE III
200 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Fixed runglock.
4. Slip-resistant feet.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2321-16*	16'	8'	13'	15' 11"	17.5	5.7'

- *Assumes 5' 7" person with 12" vertical reach
► ** Does not include rope or pulley

► *D-shaped rungs

L-2324-16



MAX LOCK™

► *D-shaped rungs


SERIES

L-2324

ALUMINUM EXTENSION LADDER



1. Mar-resistant rail end caps.



2. D-shaped rungs.



3. MaxLock™ with QuickLatch™.



4. Slip-resistant rubber feet.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2324-16**	16'	8'	13'	15' 11"	21	5.5'
L-2324-20	20'	10'	17'	19' 10"	26	7.0'
L-2324-24	24'	12'	21'	23' 8"	32	8.3'

► *Assumes 5' 7" person with 12" vertical reach
 ► ** Does not include rope or pulley

AE1660

OUR LONGEST LADDER



SERIES

AE1660

ALUMINUM 3-SECTION EXTENSION LADDER



1. Aluminum cast rail end caps.



2. Round rungs.



3. Double rope & pulley.



4. Full I-beam.



5. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	MAX. REACH*	RAIL DEPTH	STACK HEIGHT	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1660	60'	48'	49' 10"	4"	8 1/4"	169	31.0'

► *Assumes 5' 7" person with 12" vertical reach

SECTION	LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
base	22'	18"	21 1/2"
center	20'	15 5/16"	18 3/16"
fly	18'	12 5/8"	16 1/8"

► *Round rungs



SPECIALTY LADDERS

UNIQUE SOLUTIONS FOR CONQUERING ANY CHALLENGE.

FT1506

GREAT FOR
UNEVEN SURFACES

SERIES
FT1500
FIBERGLASS TRIPOD LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

ANSI
Type I Commercial
Fiberglass Ladders
ANSI A14.5MEETS
OSHA
REQUIREMENTS

1. **Raptor Top™** — multiple tool slots and magnet for increased productivity.

2. Center Pull Spreader Brace.

3. Double-rivet step construction & Heavy Duty gusset.



4. **Raptor Boot™** — Protects fiberglass & has heavy duty bonded tread.

5. **SHOX™** Advanced impact absorption protects fiberglass rails against damage.

6. Wider step surface.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FT1504	4'	28"	32"	1' 10"	8' 6"	15	5.4'
FT1506	6'	35 1/2"	44"	3' 9"	10' 4"	21	10.1'
FT1508	8'	43"	56"	5' 7"	12' 3"	30	16.1'
FT1510	10'	50 1/2"	67"	7' 6"	14' 2"	44	25.7'
FT1512	12'	58"	79"	9' 4"	16' 1"	59	34.8'

► *Assumes 5' 7" person with 12" vertical reach
► Product color may vary and are subject to change.

L-2032-02

SERIES
L-2032
ALUMINUM SAWHORSE
SCAFFOLD

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

ANSI
Type I Commercial
Aluminum Scaffolds
ANSI A14.2MEETS
OSHA
REQUIREMENTSDANGER
ELECTRICITY
DO NOT TOUCH

1. Heavy duty, slip resistant, large 10" standing surface.

2. Steel hinges & gap for easy carrying.

3. Heavy duty pinch-resistant spreader braces.



4. Heavy-duty gusset bracing.

5. Overmolded shoe with increased resistance to wear and tear.



MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2032-02	2'	32"	26"	1' 10"	8' 5"	14	5.3
L-2032-03	3'	33 3/8"	34"	2' 9"	9' 4"	21	8.0
L-2032-04	4'	34 3/4"	43"	3' 9"	10' 4"	25	11.1

► *Assumes 5' 7" person with 12" vertical reach

AZ9907



SERIES
AZ9900-800010
ALUMINUM
SINGLE WALL LADDER


TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Round rungs.



2. Full I-beam construction.



3. Combine multiple units for a custom size.



4. Designed to be affixed to a wall. Installation kits not included.

MODEL	LADDER SIZE	APPROX. WEIGHT (LBS)	APPROX. CUBES
AZ9907-800010	7'	10	2.7'
AZ9909-800010	9'	13	3.4'
AZ9910-800010	10'	15	3.8'
AZ9912-800010	12'	18	4.6'
AZ9914-800010	14'	14	5.4'
AZ9916-800010	16'	26	6.2'



MULTIPURPOSE LADDERS

ONE LADDER MULTIPLE SOLUTIONS

L-2099-22



1. **EASY OPERATION**
with lightweight
aluminum design.



3. **EASY TRANSITION**
between positions
with the safety
hinge



2. **LOCK IN**
your size &
position with ease



4. **ROCK SOLID
FOOTING**
stability in
every position



TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

SERIES
L-2099
ALUMINUM
MULTIPURPOSE LADDER

6 POSITIONS



Scaffold sold separately.

MODEL	LADDER SIZE	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	FOLDED DIMENSIONS (H x W x D)**	STEP LADDER MAX. REACH*	EXTENSION MAX. REACH*	WALL MAX REACH	ADJUSTABLE				
									STEP LADDER	STAIRWAY	SCAFFOLDING	EXTENSION	WALL
L-2099-14	14'	21	24	4.4'	8" x 22" x 44"	9' 5"	14' 2"	9' 1"	3' - 5'	3' - 5'	3'	7' - 11'	4' - 5'
L-2099-18	18'	24	32	6.5'	8" x 26" x 56"	11' 4"	18'	11'	4' - 7'	4' - 7'	4'	9' - 15'	5' - 7'
L-2099-22	22'	28	41	9.1'	8" x 29" x 68"	13' 3"	22'	13'	5' - 9'	5' - 9'	5'	11' - 19'	6' - 9'

► *Assumes 5' 7" person with 12" vertical reach

► **Width is based on widest point (bottom)

► Product color may vary and are subject to change.



SCAFFOLDS / PLANKS

WORKSITE SOLUTIONS THAT ELEVATE EFFICIENCY.

P SERIES

SCAFFOLD PLANKS AND STORAGE PLATFORMS

ANSI
Z535.1-2011
SAFETY STANDARD FOR PORTABLE
SCAFFOLDS
ANSI A10.8

OSHA
1926.1053

UL
1009


LL
DANGER
LIFE SUPPORT



1. Ergonomic, easy-grip molded handles/rungs.




3. Slip-resistant decking.



2. Reinforcing web braces.



4. Optional modular handrail system.




Overflow slots keep water, mud & snow from building up on the surface



Angled surface designed to keep fluids flowing out & away

P1 SERIES


1-Person Decorator Plank 250LBS. LOAD CAPACITY



SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)
8'*	4"	P11208	26	P11408	29	P12008	62
12'	4"	P11212	38	—	—	—	—
16'	4"	P11216	50	P11416	53	P12016	62
20'	5"	P11220	76	P11420	65	P12020	88
24'	5"	P11224	88	P11424	90	P12024	100

P2 SERIES


2-Person Scaffold Plank and Stage 500LBS. LOAD CAPACITY

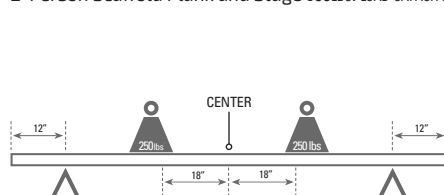

SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
5'	4"	—	—	—	—	—	—	—	—	P22805	26
6'	4"	P21206	16	—	—	—	—	—	—	P22806	35
8'	4"	—	—	—	—	—	—	—	—	P22808	41
10'	4"	—	—	—	—	—	—	—	—	P22810	50
12'	4"	P21212	41	P21412	34	P22012	52	P22412	57	P22812	60
14'	5"	—	—	—	—	—	—	—	—	P22814	76
16'	5"	P21216	47	P21416	65	P22016	69	P22416	81	P22816	85
20'	6"	P21220	97	P21420	103	P22020	115	P22420	124	P22820	129
24'	6"	P21224	112	P21424	118	P22024	133	P22424	142	P22824	151
28'	6"	P21228	142	P21428	149	P22028	166	P22428	176	P22828	185
30'	6"	—	—	—	—	—	—	—	—	P22830	200
32'	6"	P21232	160	P21432	167	P22032	181	P22432	198	P22832	213

P3 SERIES

3-Person Stage Platform 750LBS. LOAD CAPACITY

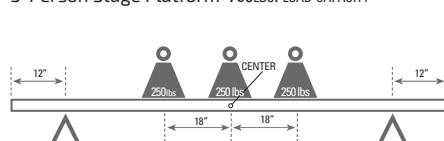

SIZE	SIDE RAIL DEPTH	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
16'	6"	P32016	87	P32416	101	P32816	111
20'	6"	P32020	119	P32420	133	P32820	137
24'	6"	P32024	135	P32424	150	P32824	163
28'	7"	P32028	217	P32428	225	P32828	239
32'	7"	—	—	P32432	252	P32832	273

ANSI
RECOGNIZED BY OSHA
AS A STANDARD SAFETY SYSTEM
ANSI A10.8

OSHA
RECOGNIZED

MODULAR GUARDRAIL SYSTEMS

FOR PLANKS AND STAGES



- *Double all quantities, except for web brace assembly, for 2-Sided Systems
- **Required on planks with side rails of less than 6"-height
- ***MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

SINGLE-SIDED SYSTEM*

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01
5'	2	2	0	1	0	2**
6'	2	2	0	1	0	2**
8'	2	2	0	1	0	2**
10'	2	0	2	0	1	2**
12'	3	0	2	0	1	3**
14'	3	0	2	0	1	3**
16'	3	4	0	2	0	3**
18'	3	0	4	0	2	3**
20'	4	6	0	3	0	4**
24'	4	6	0	3	0	4**
28'	5	4	2	2	1	0**
30'	5	8	0	4	0	0**
32'	5	4	4	2	2	0**
36'	6	10	0	5	0	0**
40'	6	6	4	3	2	0**

3-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02*
5'	4	2	0	1	0	2**	2
6'	4	2	0	1	0	2**	2
8'	4	2	0	1	0	2**	2
10'	4	0	2	0	1	2**	2
12'	5	0	2	0	1	3**	2
14'	5	0	2	0	1	3**	2
16'	5	4	0	2	0	3**	2
18'	5	0	4	0	2	3**	2
20'	6	6	0	3	0	4**	2
24'	6	6	0	3	0	4**	2
28'	7	4	2	2	1	0**	2
30'	7	8	0	4	0	0**	2
32'	7	4	4	2	2	0**	2
36'	8	10	0	5	0	0**	2
40'	8	6	4	3	2	0**	2

RAIL END CAPS

RAIL SIZE	MODEL	APPROX. WEIGHT (LBS)
Caps for 4" Rail	PK740A	0.65 Ea.
Caps for 5" Rail	PK740B	0.80 Ea.
Caps for 6" Rail	PK740C	1.07 Ea.
(2 end caps and hardware per kit)		
Caps for 7" Rail	P064226	0.8 Ea.

PRODUCT WEIGHTS

ITEM	APPROX. WEIGHT (LBS)
MPT-01	0.56
MGR-09	2.31
MGR-13	3.33
MTB-09	2.38
MTB-13	3.44
MRF-01	1.13
MER-01	2.00
MER-02	2.84

PT SERIES GUARDRAIL

HANDRAIL SOCKET WITH HARDWARE	MODEL	APPROX. WEIGHT (LBS)
3" Handrail socket w/ hardware	PR098004C	1

- ***MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

4-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	"WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02***
5'	4	4	0	2	0	2**	2
6'	4	4	0	2	0	2**	2
8'	4	4	0	2	0	2**	2
10'	4	0	4	0	2	2**	2
12'	6	0	4	0	2	3**	2
14'	6	0	4	0	2	3**	2
16'	6	8	0	4	0	3**	2
18'	6	0	8	0	4	3**	2
20'	8	12	0	6	0	4**	2
24'	8	12	0	6	0	4**	2
28'	10	8	4	4	2	0**	2
30'	10	16	0	8	0	0**	2
32'	10	8	8	4	4	0**	2
36'	12	20	0	10	0	0**	2
40'	12	12	8	6	4	0**	2



LP-2921 SERIES

MEDIUM-DUTY TELESCOPING PLANK

This medium-duty telescoping plank is available in 9', 13', and 16' sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

MODEL	PLANK LENGTH	PLANK WIDTH	STANDARD EXTENSION	APPROX. WEIGHT (LBS)
LP-2921-09A	9'	12"	6' – 9'	30
LP-2921-13A	13'	12"	8' – 13'	39
LP-2921-16A	16'	12"	10' – 16'	50

PD8000 AND PD9200 SERIES

SCAF-A-DECK

PD9207



PD9200 SERIES

ANSI

Approved by the American National Standards Institute

ANSI A10.8

OSHA

Approved by the Occupational Safety and Health Administration

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

OSHA 1926.1053

LogoLock

SYSTEM FOR FIBERGLASS LADDERS

FORGET THE STENCIL, KEEP YOUR LADDER IDENTIFIED & PROMOTE YOUR CUSTOMER'S BRAND WITH LOGOLOCK™ SYSTEM

LogoLock™ embeds a long-lasting image into the fiberglass rail of your ladders.

WHY USE LOGOLOCK™?

- Increase awareness and scope of your brand
- Refresh your company's image
- Deter theft by displaying your company's logo

HOW TO ORDER LOGOLOCK™?

- Incremental fee for each logo (added to the price of each ladder)
- Each ladder will have one custom logo applied to each side rail
- Logo dimensions should be a maximum of 7 1/16" x 2 3/8"
- Minimum order of six fiberglass ladders (any model)
- Artwork must be provided in vector format or in ".tif" or ".jpg" format at a MINIMUM of 300 dpi (dots per inch) resolution. Submit detailed instructions for logo display including color, placement, size and other customization
- After we review your images, we'll provide a customized part number and distributor pricing
- Lead time is from 5 to 10 business days



C.L.I.M.B. ACADEMY



SAFETY TRAINING PROGRAM


Louisville Ladder's C.L.I.M.B. ACADEMY teaches fundamental principles of using stepladders, extension ladders, rolling warehouse ladders, rolling tower scaffolding, and aluminum walkboards. In addition to C.L.I.M.B. ACADEMY, our customers benefit from free ladder condition assessments and ladder use audits. Several of our customers have saved thousands of dollars by avoiding OSHA fines and ladder-related accidents.

CHOOSE the right equipment
LOOK for damaged or missing parts
IMPLEMENT a safe setup routine
MOVE safely using three points of contact
BE a climbing safety expert; NOT a statistic!

REDUCE THE RISK OF
ACCIDENTS & FINES
AT THE WORK SITE

Visit our website to learn more at www.louisvilleladder.com

WAREHOUSE LOCATIONS

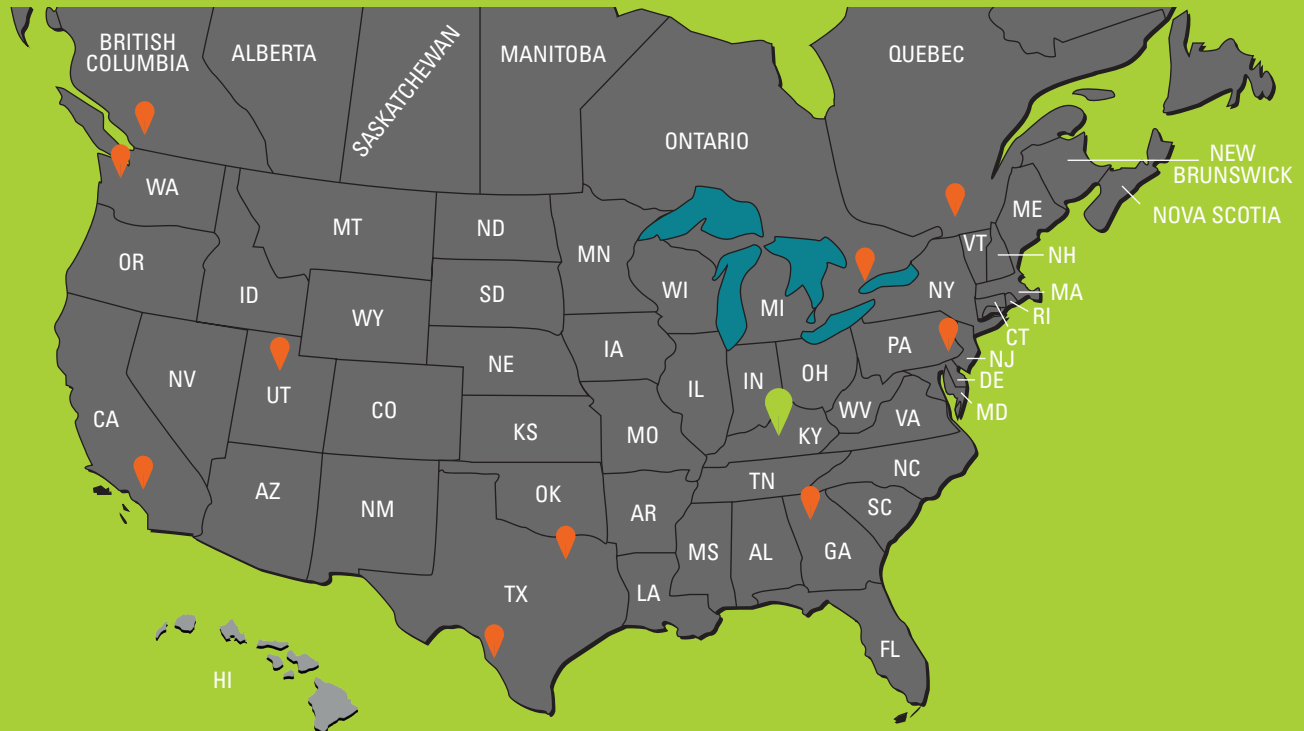

REGIONAL WAREHOUSES

BENSALEM, PA

855 Dunks Ferry Road
Bensalem, PA 19020
PHONE: (215) 638-8904

GRAND PRAIRIE, TX

801 Heinz Way
Grand Prairie, TX 75051
PHONE: (972) 602-4400

LAREDO, TX

11402 Eastpoint Dr.
Laredo, TX, 78045
PHONE: (956) 462-0949

LOUISVILLE, KY

7765 National Turnpike, Unit 190
Louisville, KY, 40214
PHONE: (502) 636-2811

ONTARIO, CA

2050 S. Baker Ave.
Ontario, CA 91761
PHONE: (909) 941-0623

SALT LAKE CITY, UT

760 West Layton Ave.
Salt Lake City, UT 84104
PHONE: (801) 854-8949

SEATTLE, WA

920 S. Doris Street
Seattle, WA 98108
PHONE: (206) 762-4888
FAX: (206) 767-4386

TUCKER, GA

2689A Mountain Industrial Blvd.
Tucker, GA 30084
PHONE: (770) 491-1515

CANADA

QUEBEC

2001 Francis Hughes
Laval, QC H7S 2G2
PHONE: (450) 668-4610
FAX: (450) 668-4611

ONTARIO - HEAD OFFICE & WAREHOUSE

100 Engelhard Drive
Aurora, ON L4G 3V2
PHONE: (800) 867-5233
USA: (888) 252-3337
FAX: (905) 727-7271

BRITISH COLUMBIA

17260 Heather Drive Unit 202
Surrey, BC V3S 0B4
PHONE: (604) 940-2972
FAX: (604) 940-2973



GLOBAL HEADQUARTERS AND WAREHOUSE

7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvillessladder.com

PHONE (USA & CAN) 1.800.666.2811

PHONE 1.502.636.2811

FAX 1.800.274.4566

EMAIL marketing@louisvillessladder.com

CONNECT
WITH LOUISVILLE LADDER AT



TERMS AND CONDITIONS

SCAN TO VIEW



Subject to our
Terms & Conditions

LOUISVILLE

BUILT TO
ABOVE BE

7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvilleadder.com

PHONE
(USA AND CAN) 1.800.666.2811
PHONE 1.502.636.2811
FAX 1.800.274.4566
EMAIL marketing@louisvilleadder.com